

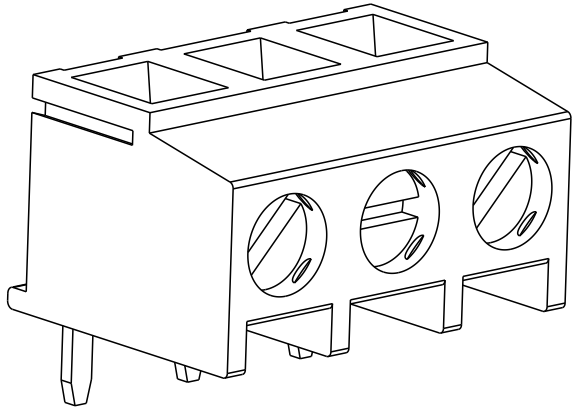
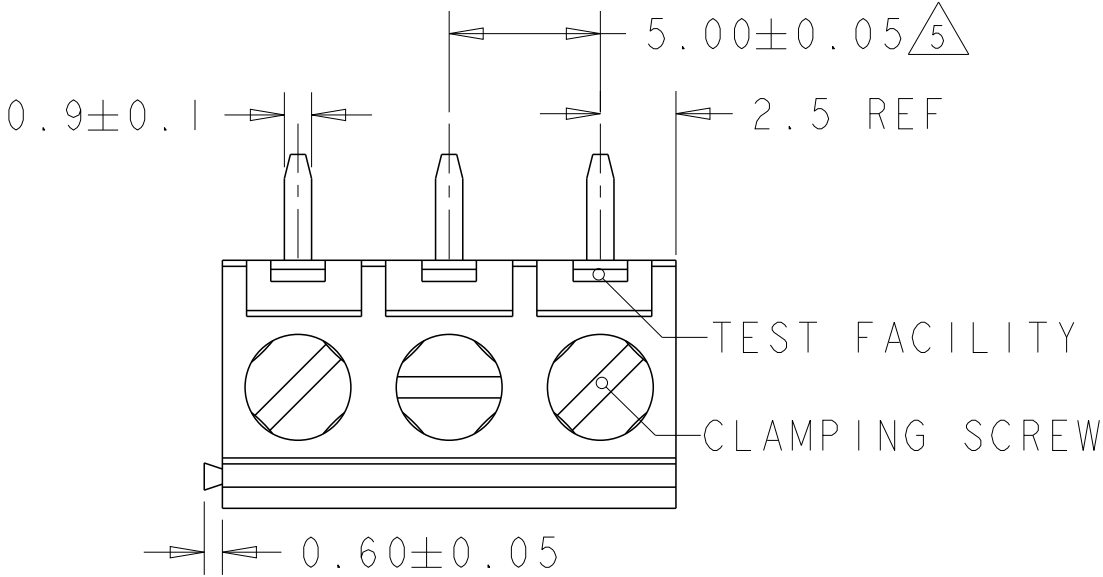


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	E	PACKAGING CHANGED FROM BLACK POLYURETHANE SPONGE TO TRAY	06MAR2018	RK	PS	

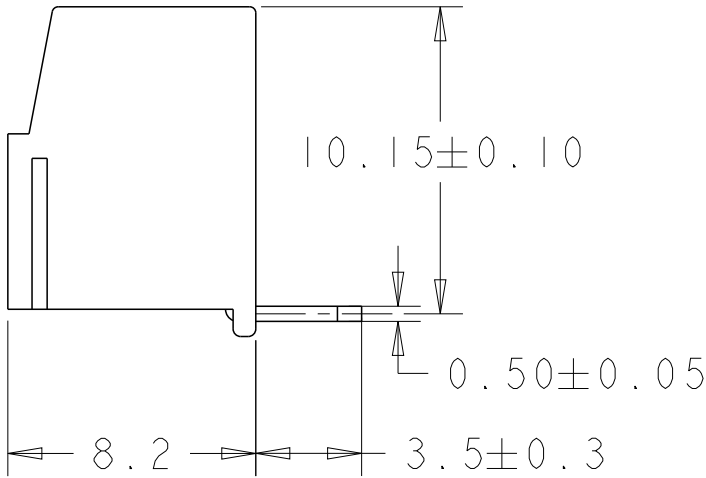

284093-3 AS SHOWN

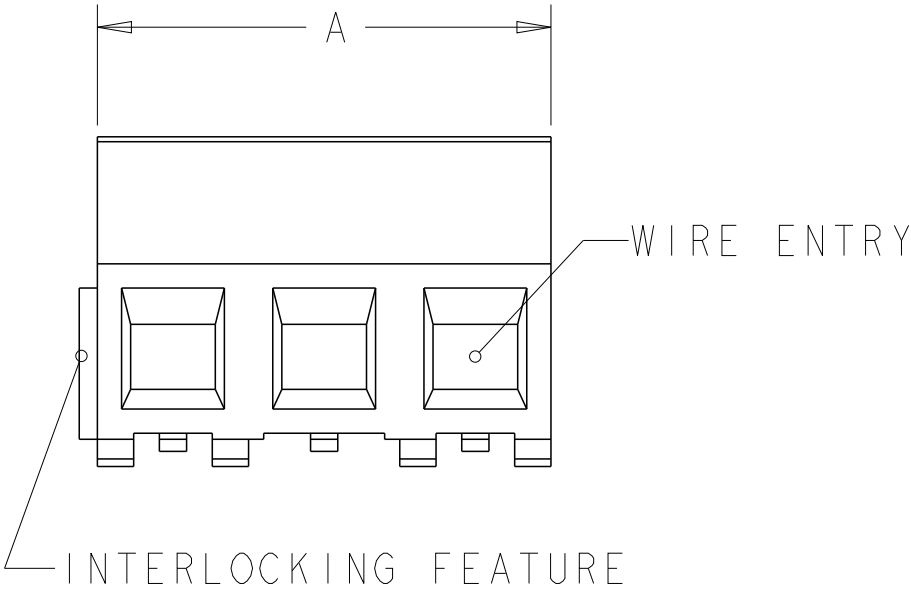

8	125.0	25	2-284093-5
	120.0	24	2-284093-4
	115.0	23	2-284093-3
	110.0	22	2-284093-2
	105.0	21	2-284093-1
	100.0	20	2-284093-0
	95.0	19	1-284093-9
	90.0	18	1-284093-8
	85.0	17	1-284093-7
	80.0	16	1-284093-6
	75.0	15	1-282093-5
	70.0	14	1-284093-4
	65.0	13	1-284093-3
	60.0	12	1-284093-2
	55.0	11	1-284093-1
	50.0	10	1-284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3
			284093-2
			284093-1
			284093-0
			284093-9
			284093-8
			284093-7
			284093-6
			284093-5
			284093-4
			284093-3

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

NOTES:

- 1

MATERIALS AND FINISH
HOUSING: PA 6-6, UL 94-V0, COLOR GREEN.
CLAMP: BRASS, NICKEL PLATED.
TERMINAL: BRASS, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.
2.

MECHANICAL
WIRE STRIPPING LENGTH : 5.0-6.0 mm
MIN. PC BOARD HOLES DIAMETER : 1.1 mm
MAX. PC BOARD THICKNESS : 2.4 mm
RECOMMENDED TIGHTENING TORQUE FOR SCREW : 0.5 Nm.
3.

ELECTRICAL
WIRE RANGE : 16-30 AWG
MAX. VOLTAGE : 300 V
MAX CURRENT : 13.5 A
CONTACT RESISTANCE : <15 m Ohm
INSULATION RESISTANCE : >1000 M Ohm (500V DC)
4.


END-TO-END STACKABLE W/INTERLOCK WITHOUT LOSS OF
CENTERLINE SPACING.
- 5

NOT CUMULATIVE TOLERANCE.
6.

PART COMPLIES WITH EN 60335-1.
7.

PACKED IN TRAY.
- 8

OBSOLETE.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. ZANOLINI	10SEP2001	TE Connectivity				
DIMENSIONS: mm		CHK D. BIEVENOUR	10SEP2001					
		APVD D. BIEVENOUR	10SEP2001	NAME TERMINAL BLOCK, PCB MOUNT TOP ENTRY WIRE, STACKING W/INTERLOCK, 5.00mm PITCH				
		PRODUCT SPEC 108-20166						
APPLICATION SPEC 114-20079		SIZE	CAGE CODE		DRAWING NO	RESTRICTED TO -		
MATERIAL	FINISH	WEIGHT -			A300779C-284093			
		CUSTOMER DRAWING			SCALE 4:1	SHEET 2	OF 2	REV E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[284093-4](#)