




P	LTR	DESCRIPTION	DATE	DWN	APVD
	N1	REVISED PER ECO-11-004917	11MAR11	RK	HMR
	N2	REVISED PER ECO-17-006294	10OCT2017	RS	DR

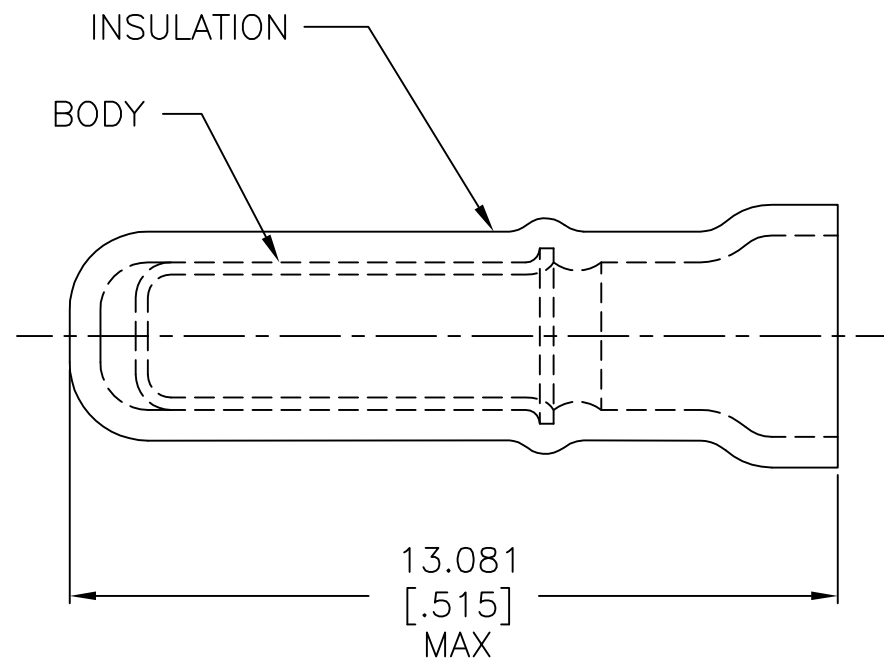

- 1 USE FOR AN UNSTRIPPED (SINGLE) WIRE END ONLY.
- 2 WIRE INSUL, $\phi 1.219-1.905[\phi .048-.075]$

1000	LOOSE PIECE	324484
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]		THIS DRAWING IS A CONTROLLED DOCUMENT.		<div><div>DWN L OLMEDA 14FEB95</div><div>CHK M ELLIS 14FEB95</div><div>APVD T MICHIELUTTI 14FEB95</div><div>PRODUCT SPEC —</div><div>APPLICATION SPEC —</div><div>WEIGHT —</div></div> <div> TE Connectivity</div>		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: — —	<div><div>DIMENSIONS: mm [INCHES]</div><div></div></div>	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± 0.127[.005] 4 PLC ± — ANGLES ± —	NAME SPARE WIRE CAP, TRANSPARENT .048-.075 INSULATION			
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: —			SIZE A3	CAGE CODE 00779	DRAWING NO C=324484	RESTRICTED TO —
FOR ORDER ENTRY	1-800-526-5142	—			CUSTOMER DRAWING			SCALE 8:1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[324484](#)