


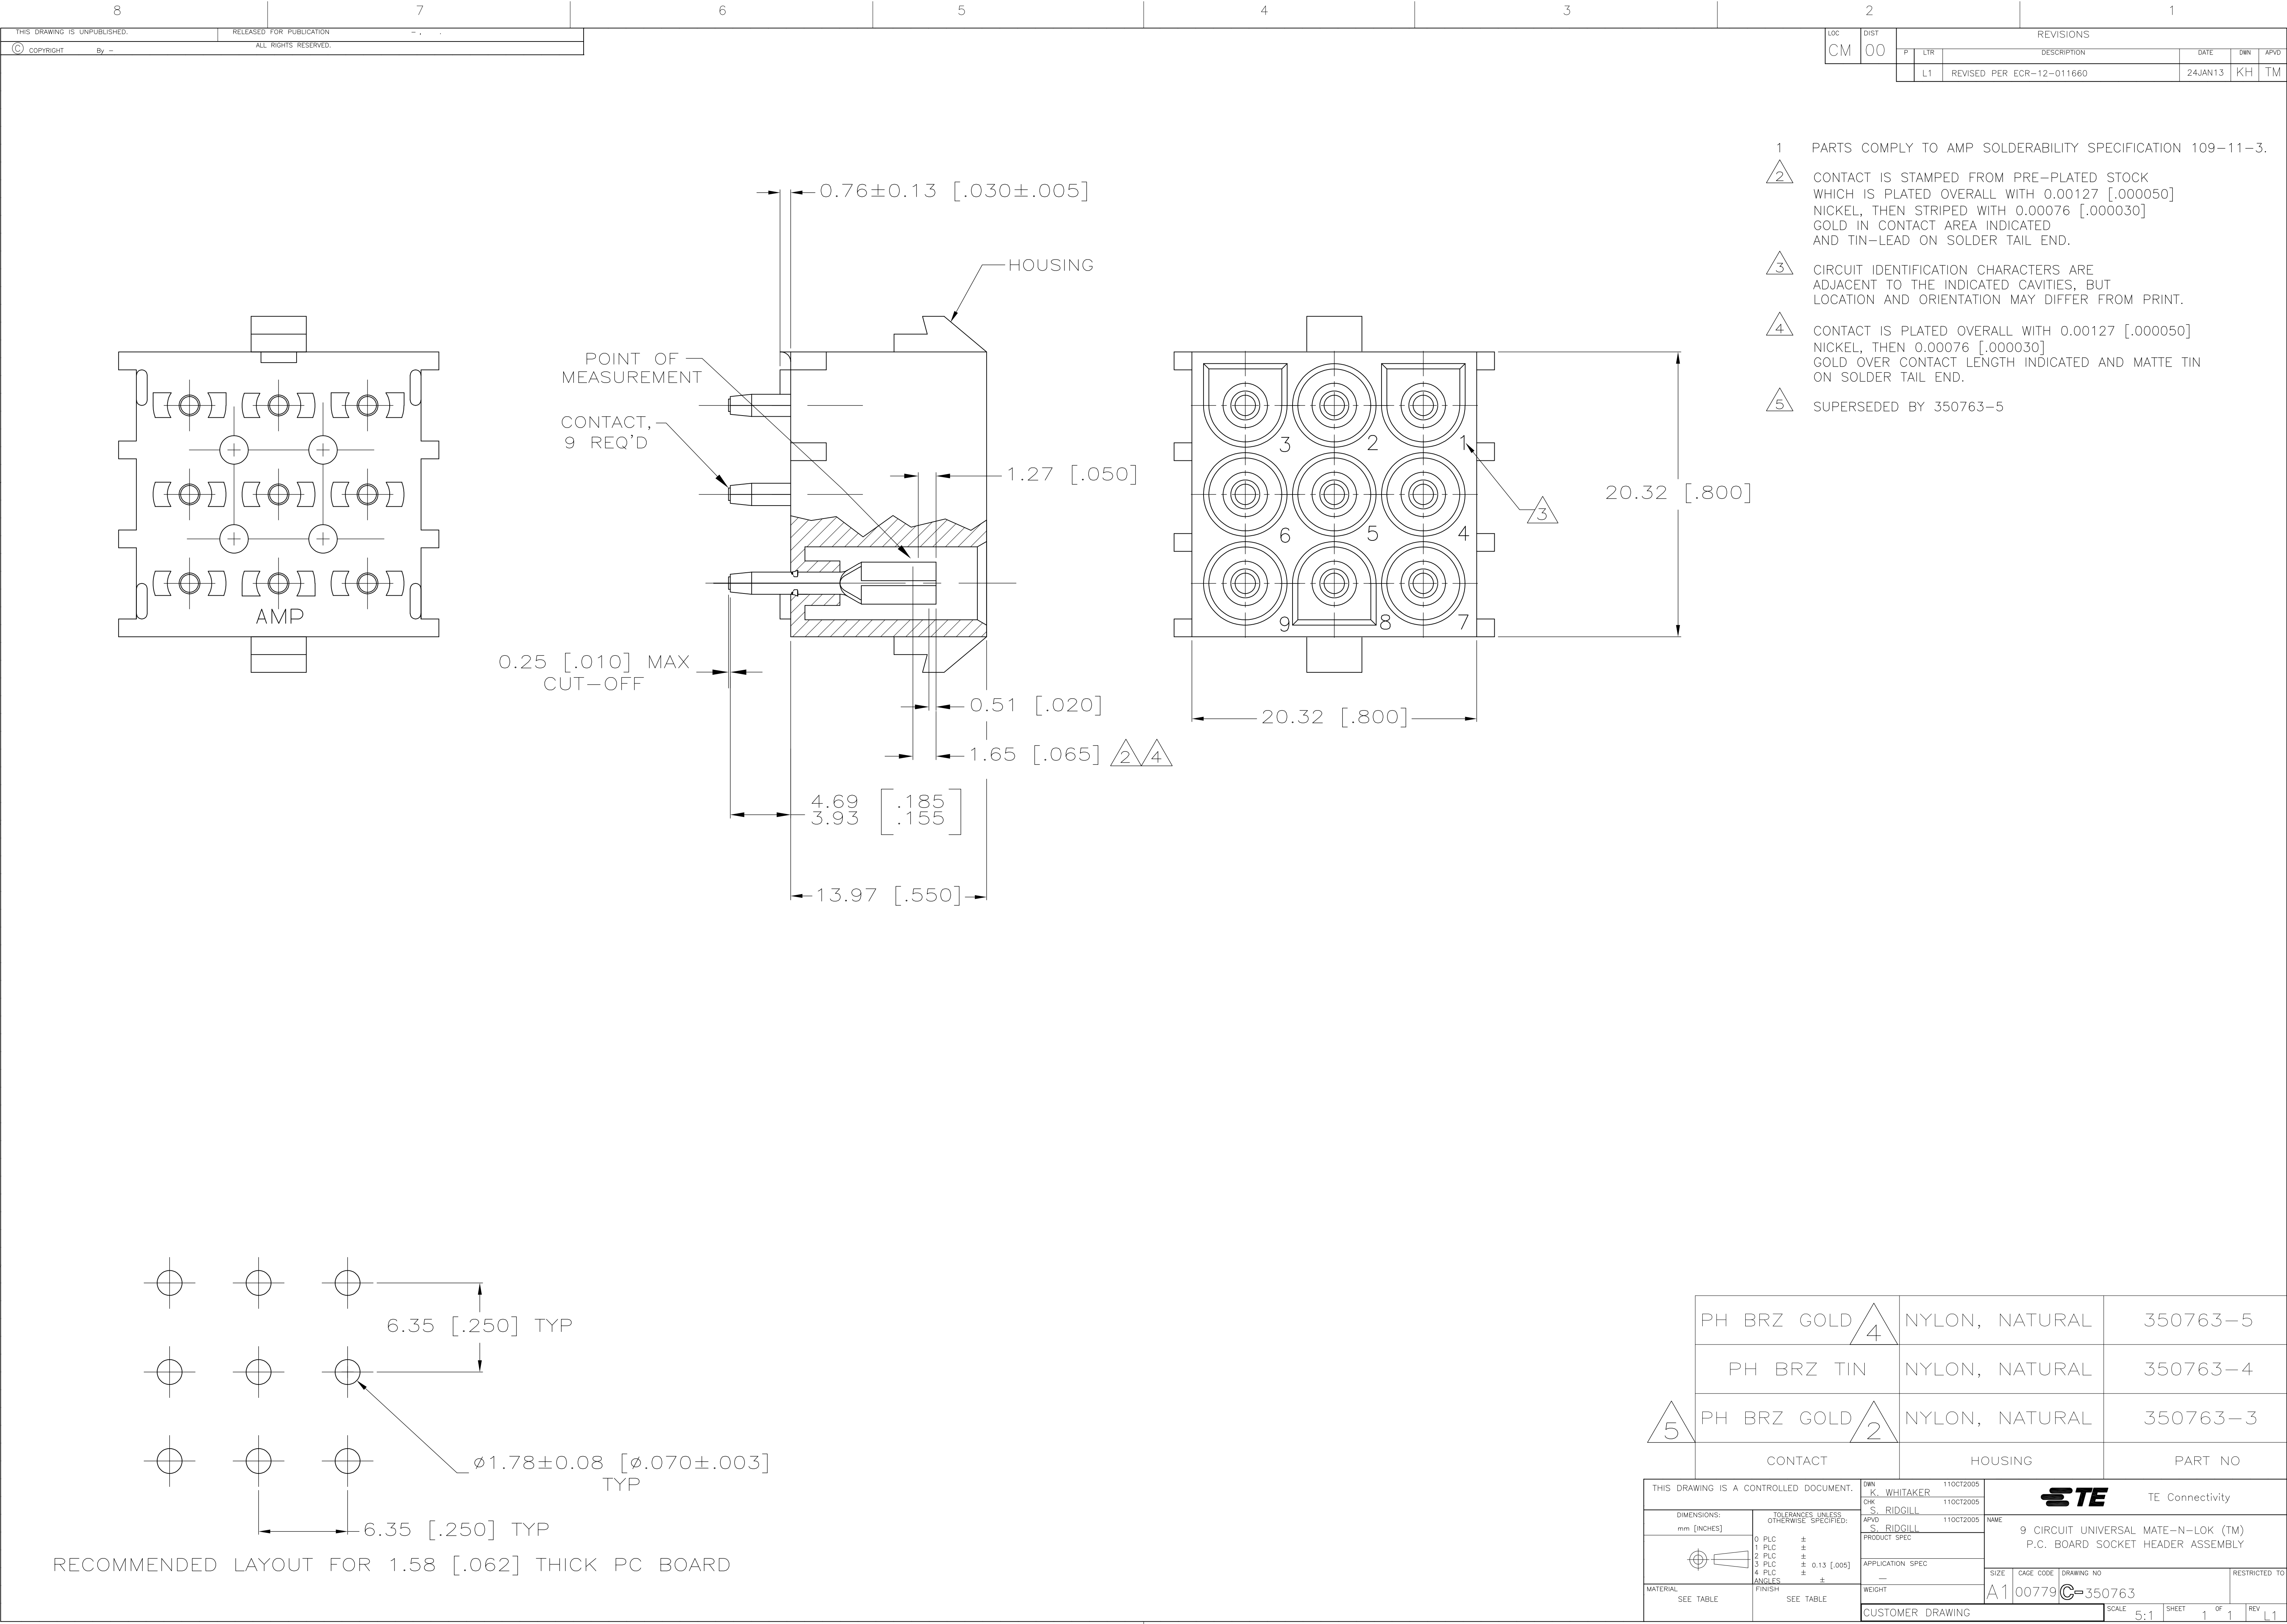

LOC		DIST		REVISIONS				
CM	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		L1		REVISED PER ECR-12-011660		24JAN13	KH	TM

- 1 PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 2 CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [0.00050] NICKEL, THEN STRIPED WITH 0.00076 [0.00030] GOLD IN CONTACT AREA INDICATED AND TIN-LEAD ON SOLDER TAIL END.
- 3 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 4 CONTACT IS PLATED OVERALL WITH 0.00127 [0.00050] NICKEL, THEN 0.00076 [0.00030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
- 5 SUPERSEDED BY 350763-5

PH BRZ GOLD 4		NYLON, NATURAL	350763-5
PH BRZ TIN		NYLON, NATURAL	350763-4
5	PH BRZ GOLD 2	NYLON, NATURAL	350763-3
CONTACT		HOUSING	PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 11OCT2005 CHK S. RIDGILL 11OCT2005 APVD S. RIDGILL 11OCT2005 PRODUCT SPEC	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 0.13 [0.005] 4 PLC ± ANGLES ±	
MATERIAL SEE TABLE		APPLICATION SPEC — WEIGHT — A1 00779-350763	
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1 REV L1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[350763-5](#)