
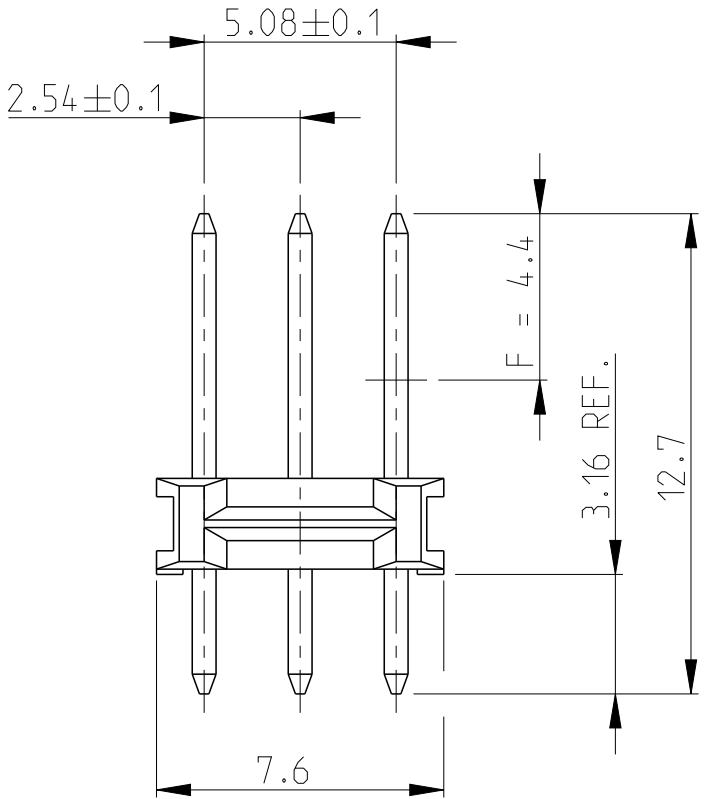


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
A1	-		C	CONTACT PIN MATERIAL AND PLATING CHANGE	18JUL2014	KJK JK


POS. PER ROW	L +0.3 -0.6	PART NUMBER	POS. PER ROW	L +0.3 -0.6	PART NUMBER
-	-	-	26	66.04	2-829 492-6
2	5.08	829 492-2	27	68.58	2-829 492-7
3	7.62	3	28	71.12	2-829 492-8
4	10.16	4	29	73.66	2-829 492-9
5	12.70	5	30	76.20	3-829 492-0
6	15.24	6	31	78.74	3-829 492-1
7	17.78	7	32	81.28	3-829 492-2
8	20.32	8	33	83.82	3-829 492-3
9	22.86	9	34	86.36	3-829 492-4
10	25.40	10	35	88.90	3-829 492-5
11	27.94	11	36	91.44	3-829 492-6
12	30.48	12	37	93.98	3-829 492-7
13	33.02	13	38	96.52	3-829 492-8
14	35.56	14	39	99.06	3-829 492-9
15	38.10	15	40	101.60	4-829 492-0
16	40.64	16	41	104.14	4-829 492-1
17	43.18	17	42	106.68	4-829 492-2
18	45.72	18	43	109.22	4-829 492-3
19	48.26	19	44	111.76	4-829 492-4
20	50.80	20	45	114.30	4-829 492-5
21	53.34	21	46	116.84	4-829 492-6
22	55.88	22	47	119.38	4-829 492-7
23	58.42	23	48	121.92	4-829 492-8
24	60.96	24	49	124.46	4-829 492-9
25	63.50	25	50	127.00	5-829 492-0

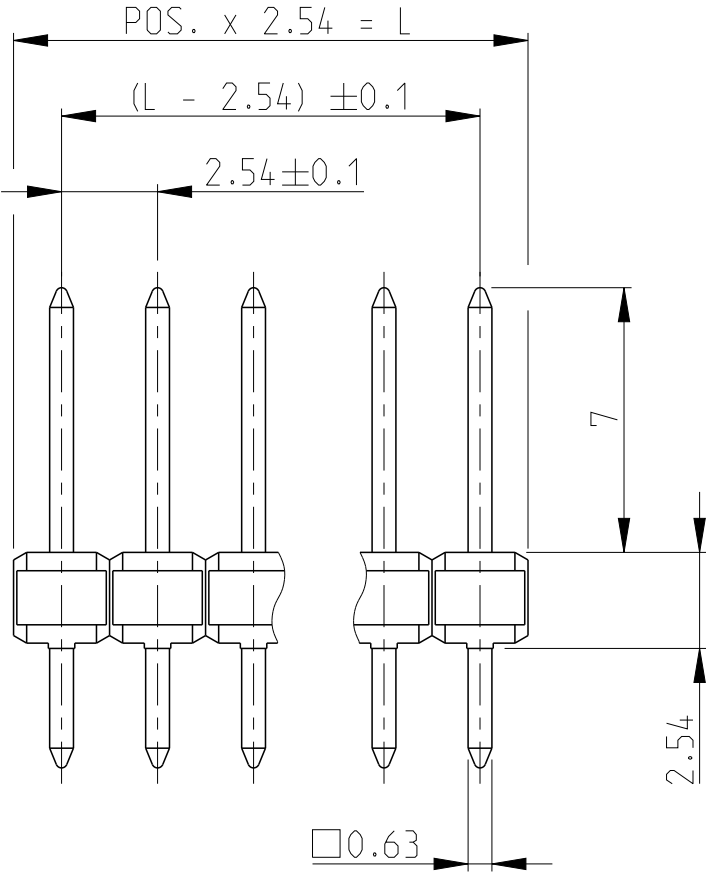

1 MATING SIDE: MIN. 0.7 µm PdNi + MIN. 0.1 µm GOLD FLASH BY AREA "F" OVER 1.27 µm NICKEL
SOLDER SIDE: MIN. 3.0 µm TIN OVER 1.27 µm NICKEL

2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
3 OBSOLETE

1	CuZn	CONTACT PIN KONTAKTSTIFT
COLOUR BLACK	PCT	PIN HOUSING STIFTGEHAEUSE
REMARK BEMERKUNG	MATERIAL	DESCRIPTION BEZEICHNUNG

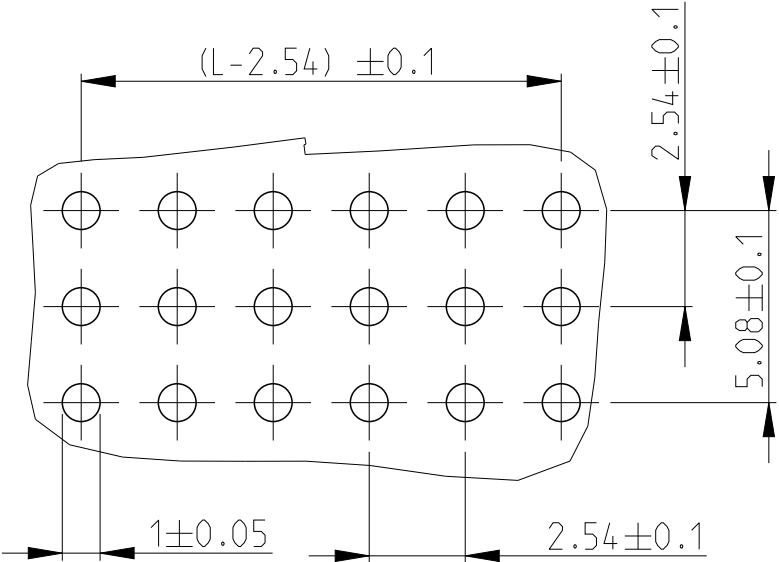

PC BOARD LAYOUT
LEITERPLATTEN-
ANSCHLUSSBILD

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN F.MUELLER 06NOV1989	TE Connectivity			
		CHK M.SCHAARSCHMIDT 06NOV1989				
DIMENSIONS: mm		APVD -	NAME AMPMODU II PIN HEADER TRIPLE ROW			
		PRODUCT SPEC 108-18012				
		APPLICATION SPEC -				
MATERIAL SEE TABLE		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-829492	RESTRICTED TO -
			CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1
					REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[829492-3](#)