


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	21AUG2015	HW	XX
	A1	ECR-16-010106	14JUL2016	HW	XX
	B	ECR-18-019963	28DEC2018	G.W	C.W

NOTE:

- ①. STRIP ALL THE INSULATION
- ②. CODE POSITION
- ③. RECOMMENDED TORQUE 0.6 Nm
- ④. -*:CABLE LENGTH
-0.5:0.5M,
-1.0:1.0M,
...
-10.0:10.0M,
5. CABLE ASSEMBLY TO BE PACKAGED IN POLYBAGS
- ⑥. LABEL CONTAINS: PN, DATE CODE...
- ⑦. CABLE LENGTH CODE:
STANDARD LENGTH:001...007
CUSTOMIZATION LENGTH: >1.0M;XX OR XX5
EXAMPLE:3.5M:035;15M;150...
<1.0M;99X
EXAMPLE:0.4M:994;...0.9M:999

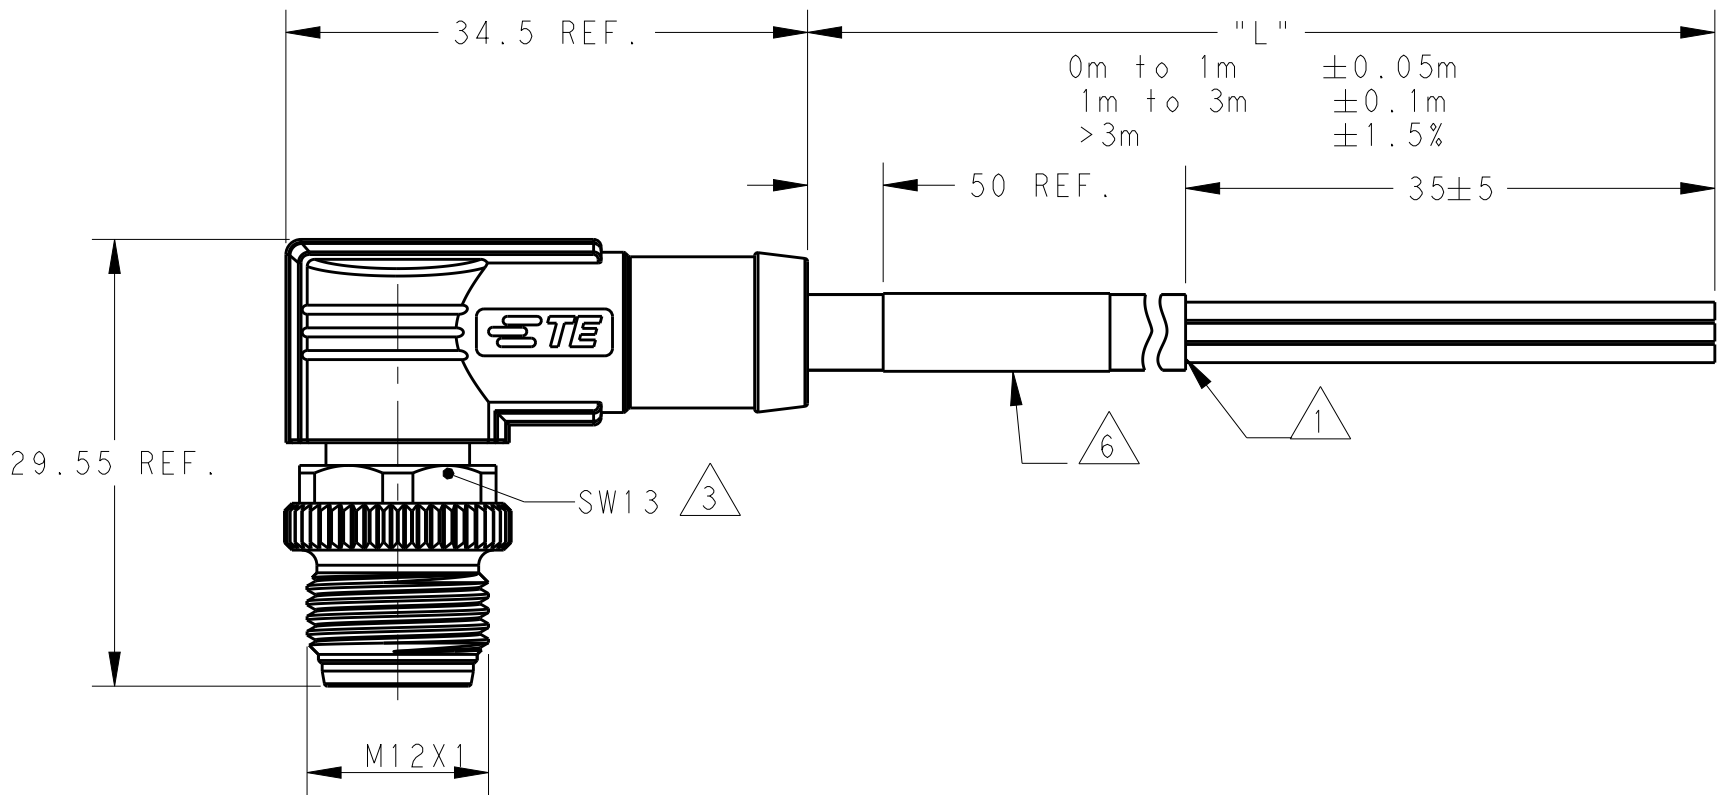

A detailed line drawing of a cable connector assembly. The assembly consists of a cable with a braided shield and an inner conductor, terminated in a connector. The connector has a threaded front section with a circular opening (1) containing a central pin (2). A locking ring (3) is located behind the front section. The main body of the connector is cylindrical and features a label (4) with the text 'EST-E'. A locking screw (5) is located on the side of the main body. The cable jacket (6) is shown extending from the main body.

5. 线缆组件塑料袋包装

△6. 标签包含： 产品编号， 日期代码...

△7. 线缆长度编码：

标准长度：001...007

定制长度：>1.0M；XX0 或 005

例如：3.5M:035；15.0M:150...

<1.0M；99X

例如：0.4M:994；0.9M:999

DWN	HAO WANG	11AUG2015	 TE Connectivity			
	CHK	11AUG2015				
D:	BOBBY ZHAO	11AUG2015	NAME M12X1 RIGHT ANGLE PLUG, FREE END A-CODE, UNSHIELDED,			
	APVD	11AUG2015				
	PRODUCT SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO 108-106140 APPLICATION SPEC - WEIGHT - A2 - C=T41512X00XX00X			
	108-106140					
	APPLICATION SPEC					
	-					
CUSTOMER DRAWING		SCALE		SHEET		REV
		2:1		1 OF 1		B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T4151220003-005](#)