

B13

SERRATION DESIGN - 1



STANDARD POWER TIMER CONTACT

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
------	-----------	------------	---------------

SIZE	CAGE CODE	DRAWING NO
------	-----------	------------

5048		
------	--	--

SCALE	10:1	SHEET	1	OF	1	REV	B13
-------	------	-------	---	----	---	-----	-----

VERSION A

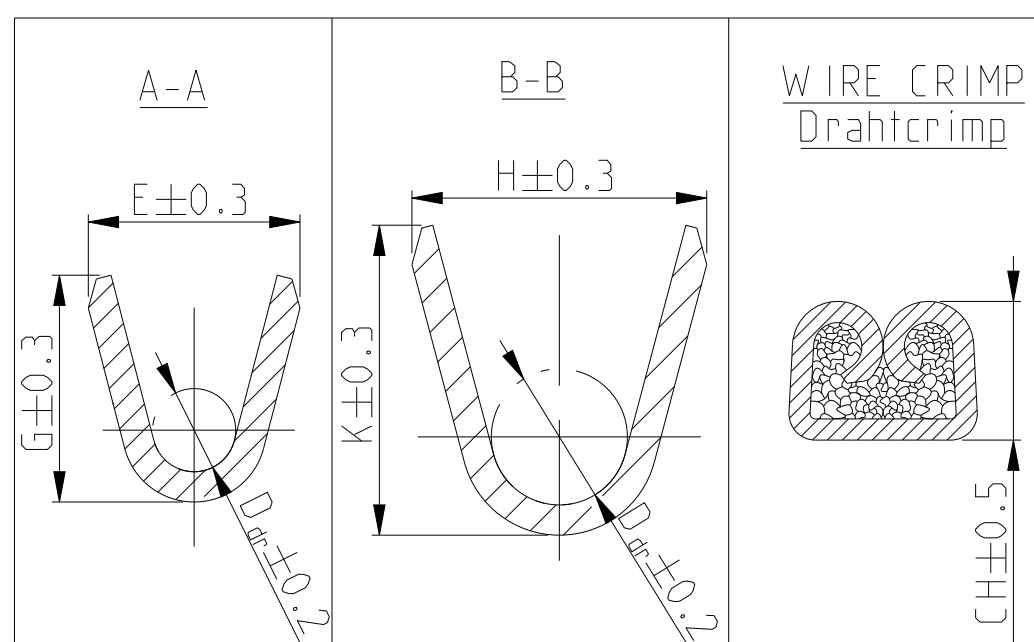
VERSION B

VERSION A

VERSION B

CONTACT BODY: ELECTRO TIN PLATED OVER NICKEL
TOUCHING AREA TO CANTILEVER SPRING:
SELECTIVE AU PLATED OVER NICKEL
CANTILEVER SPRING: COMPLETELY AU PLATED
Kontaktkörper: gal. verzinkt ueber Nickel
Anlageflaeche zur Ueberfeder
selektiv Au ueber Ni beschichtet
Ueberfeder: komplett Au beschichtet

Technical drawing of a U-shaped component. The drawing shows a cross-section of the component, which is U-shaped with a central circular hole. The dimensions are specified as $H \pm 0.3$ for the width and $K \pm 0.3$ for the height. A 20° angle is indicated for the side profile.

B-B

	DOTTED LINE IS ALTERNATIVE SHAPE Gestrichelte Linie alternative Form
	OBSELETE
	SEE APPLICATION SPEC. FOR PREFERRED STANDARD TO MEET NEW REQUIREMENT LV214-2 SLOW MOTION BENDING TEST Siehe Verarbeitungs Spezifikation fuer bevorzugten Standard um den neuen Anforderungen der LV214-2 Slow Motion Pruefung zu genuegen

11 DOTTED LINE IS ALTERNATIVE SHAPE
Gestrichelte Linie alternative Form

 OBSOLETE

SEE APPLICATION SPEC. FOR PREFERRED STANDARD TO MEET NEW REQUIREMENT
LV214-2 SLOW MOTION BENDING TEST
Siehe Verarbeitungs Spezifikation fuer bevorzugten Standard um den neuen
Anforderungen der LV214-2 Slow Motion Pruefung zu genuegen

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[927824-2](#)