
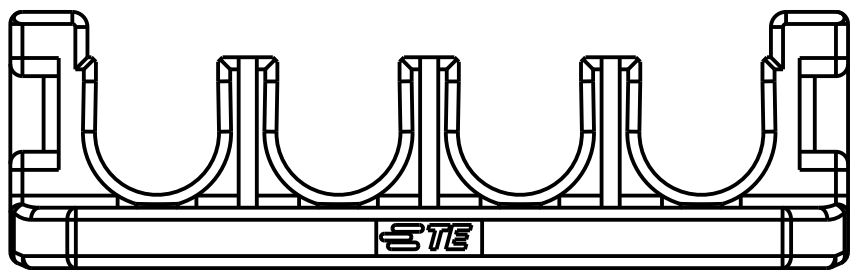
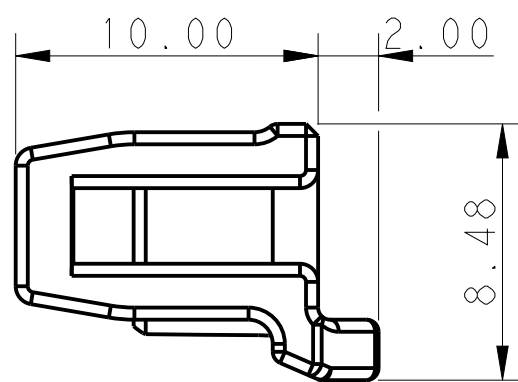
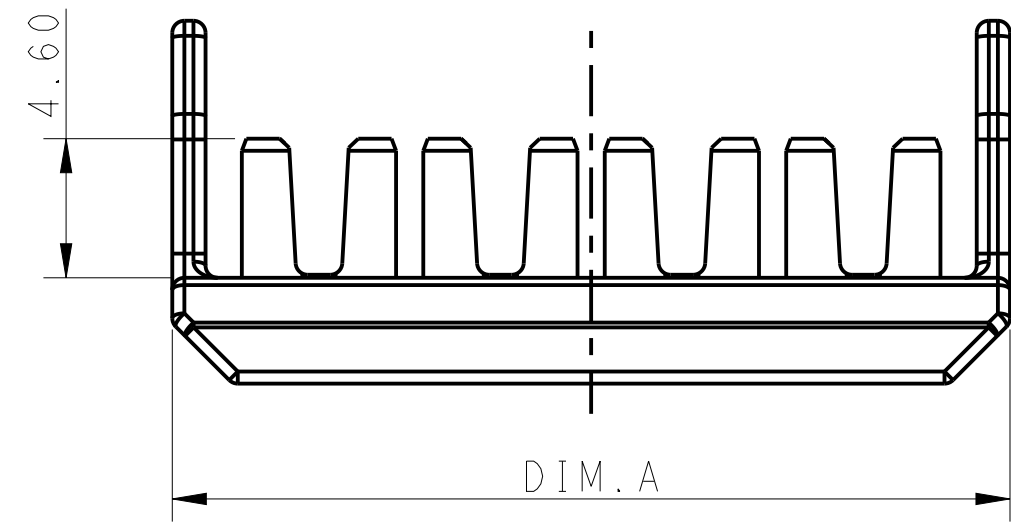
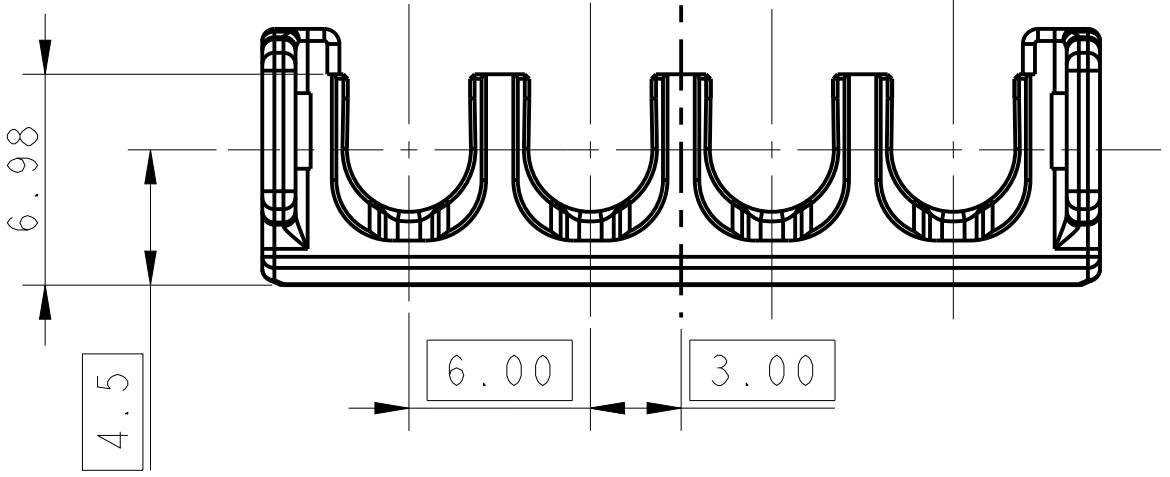


D

C

B

A

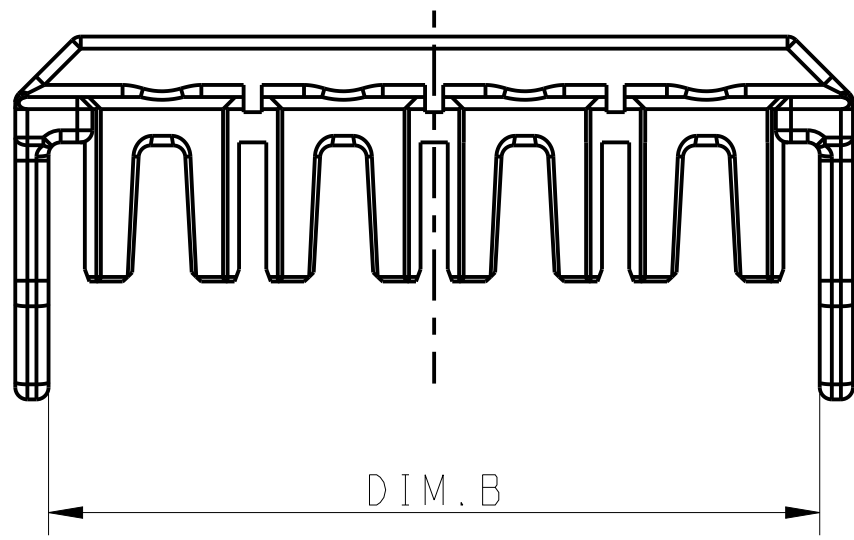

- NOTE
- 1 HIGH TEMP VERSIONS ARE RATED 150°C MAX AND ARE RECOMMENDED FOR USE WITH HIGH TEMP AND GLOW WIRE RATED HOUSINGS.
 - 2 HOT WIRE IGNITION(HWI) VERSIONS ARE MOLDED IN A RESIN THAT COMPLIES WITH TE PENDING HOT WIRE IGNITION TEST AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY.
 - 3 STANDARD TEMPERATURE VERSIONS, RATED 140°C MAX ARE RECOMMENDED FOR USE WITH STANDARD TEMP AND GLOW WIRE RATED HOUSINGS.
 - 4. MATING CONN, P/N
CAP HSG: *-1971*7*-*/*-22322***-*/*-22323***-
PLUG HSG: *-1971*7*-*/*-22322***-*/*-22323***-*
 - 5. FLAMMABILITY RATING: UL94V-0

POS.	DIM.A	DIM.B
1*5	33.70	31.5
1*4	27.70	25.5
1*3	21.70	19.5
1*2	15.70	13.5

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	TE Connectivity			
DIMENSIONS: mm		CHK HAPYE WU 09JUL2012				
		APVD YUJHONG MAO 09JUL2012	NAME TPA, SINGLE ROW POWER TRIPLE LOCK			
		PRODUCT SPEC 108-106118	SIZE A200779			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-106118	CAGE CODE C-1971777		DRAWING NO	RESTRICTED TO
MATERIAL		WEIGHT -	SCALE -		SHEET 1 OF 2	REV D
SEE TABLE		Customer Drawing				


D

C

B

A

		-	SEE SHEET 1	-	-	-

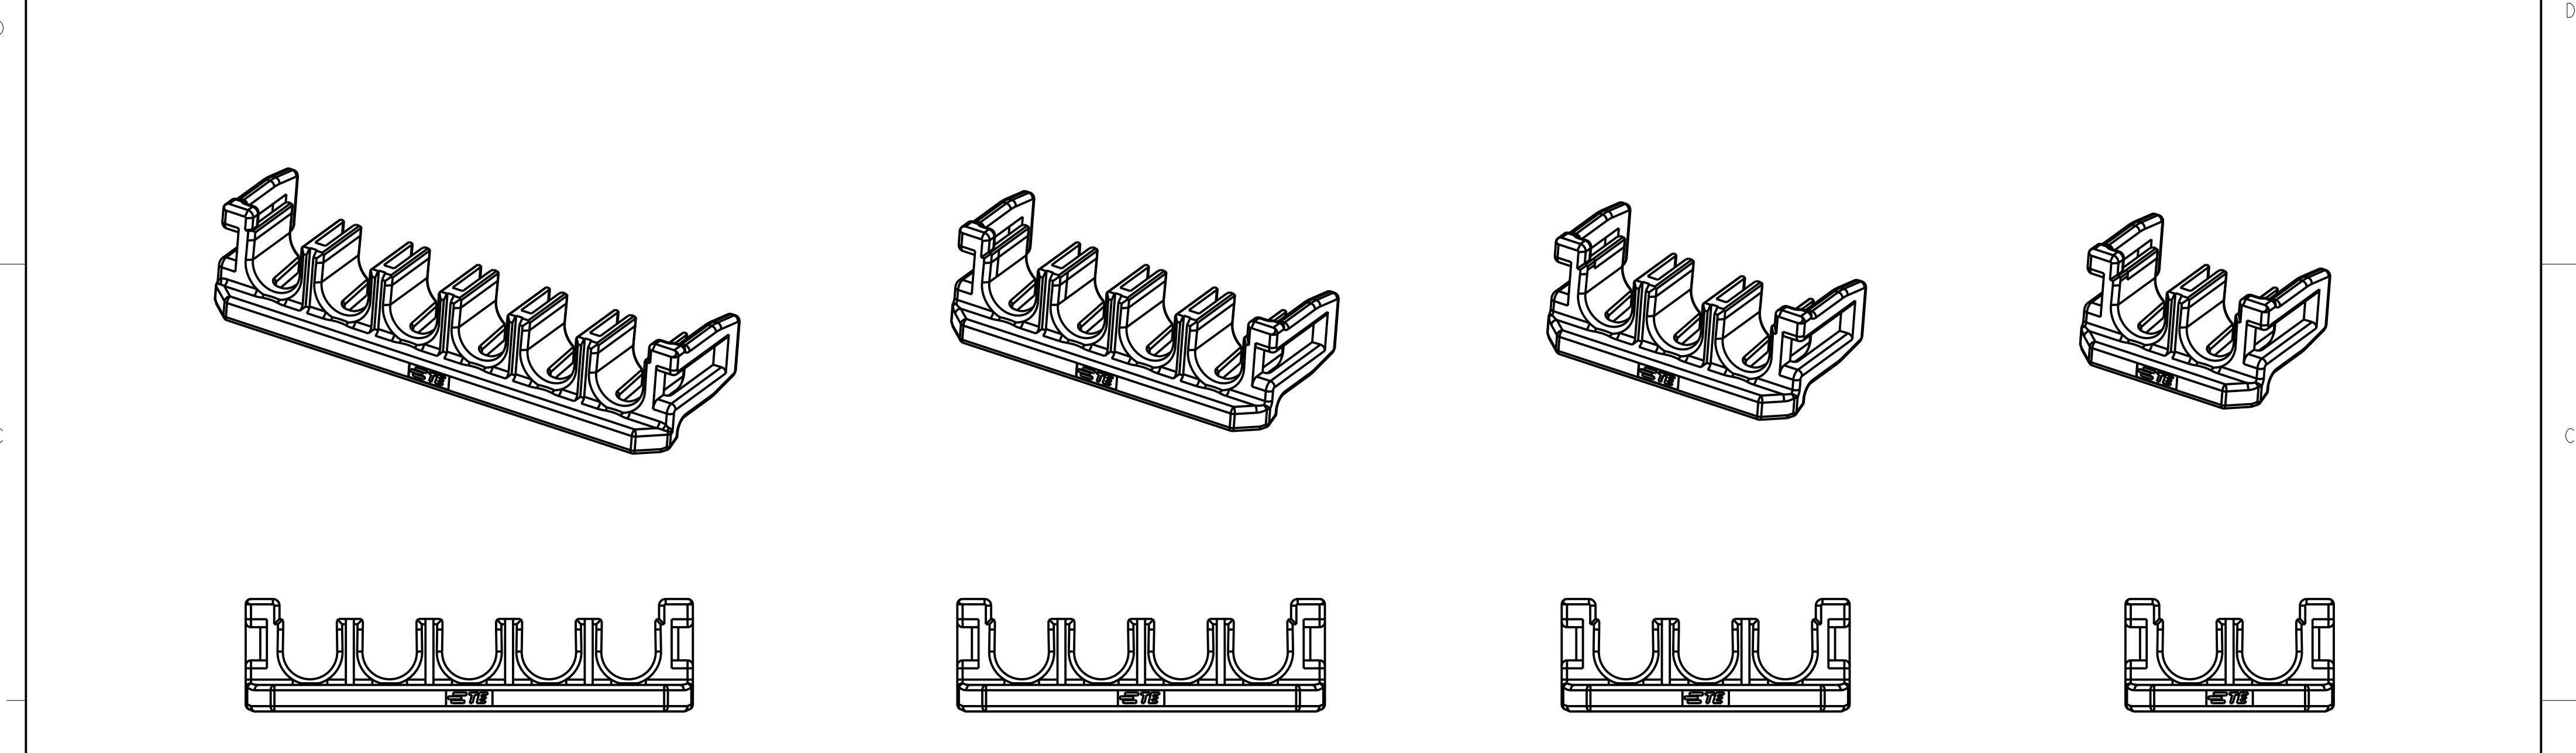

1*5 POSITIONS

1*4 POSITIONS

1*3 POSITIONS

1*2 POSITIONS

RED	PBT GF	STANDARD TEMP $\triangle 3$	1*5	$\triangle 6$ 4-1971777-5
			1*4	$\triangle 6$ 4-1971777-4
			1*3	$\triangle 6$ 4-1971777-3
			1*2	$\triangle 6$ 4-1971777-2
BLACK	PBT GF	HWI $\triangle 2$	1*2	3-1971777-2
NATURAL	PBT GF	HWI $\triangle 2$	1*5	2-1971777-5
			1*4	2-1971777-4
			1*3	2-1971777-3
			1*2	2-1971777-2
BLACK	NYLON PA66	HIGH TEMP $\triangle 1$	1*5	1971777-5
			1*4	1971777-4
			1*3	1971777-3
			1*2	1971777-2
COLOR	MATERIAL	TYPE	POSITIONS	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

09JUL2012

CHK

09JUL2012

APVD

09JUL2012

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±-

1 PLC ±0.35

2 PLC ±0.25

3 PLC ±-

4 PLC ±-

ANGLES ±-

FINISH

MATERIAL

SEE TABLE

DWN

09JUL2012

CHK

09JUL2012

APVD

09JUL2012

PRODUCT SPEC

108-106118

APPLICATION SPEC

114-106118

WEIGHT

-

Customer Drawing

SCALE

-

SHEET

2

OF

2

REV

D

TE Connectivity

NAME

TPA, SINGLE ROW POWER TRIPLE LOCK

-

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C-1971777

-

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1971777-4](#)