

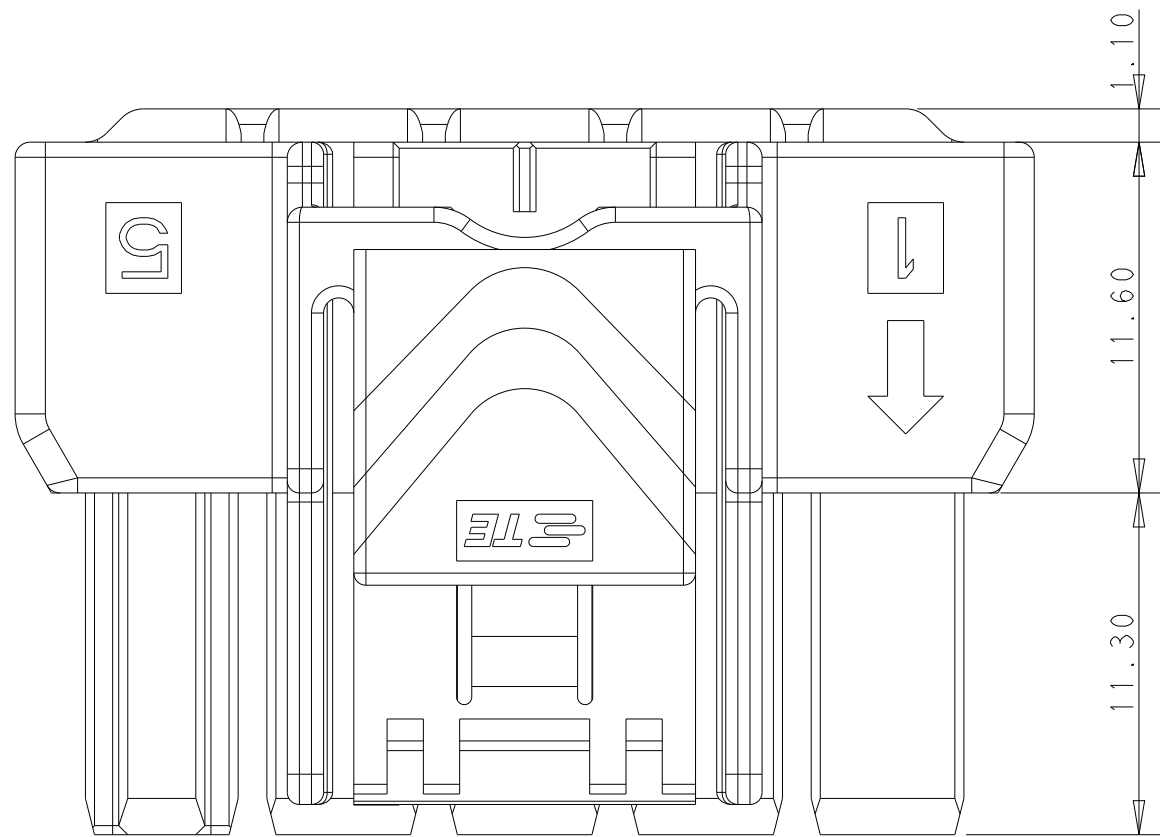
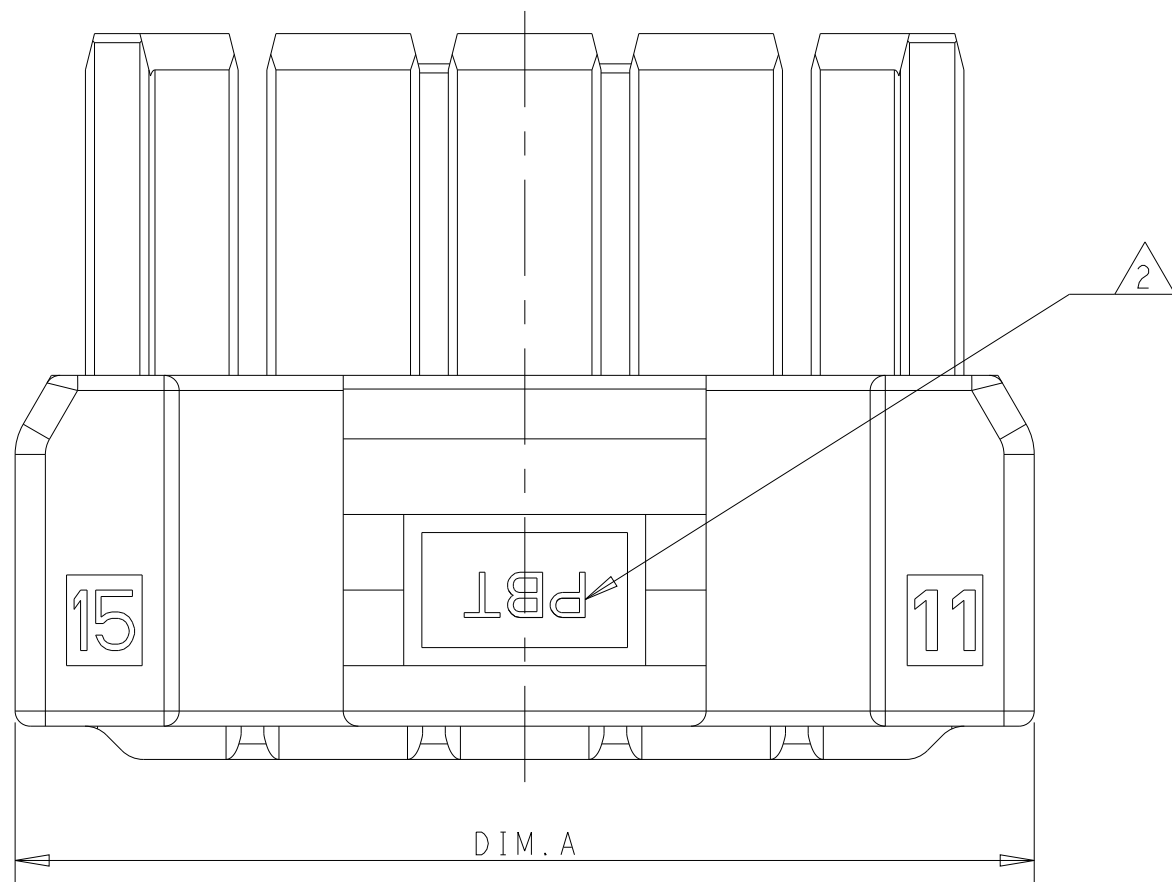
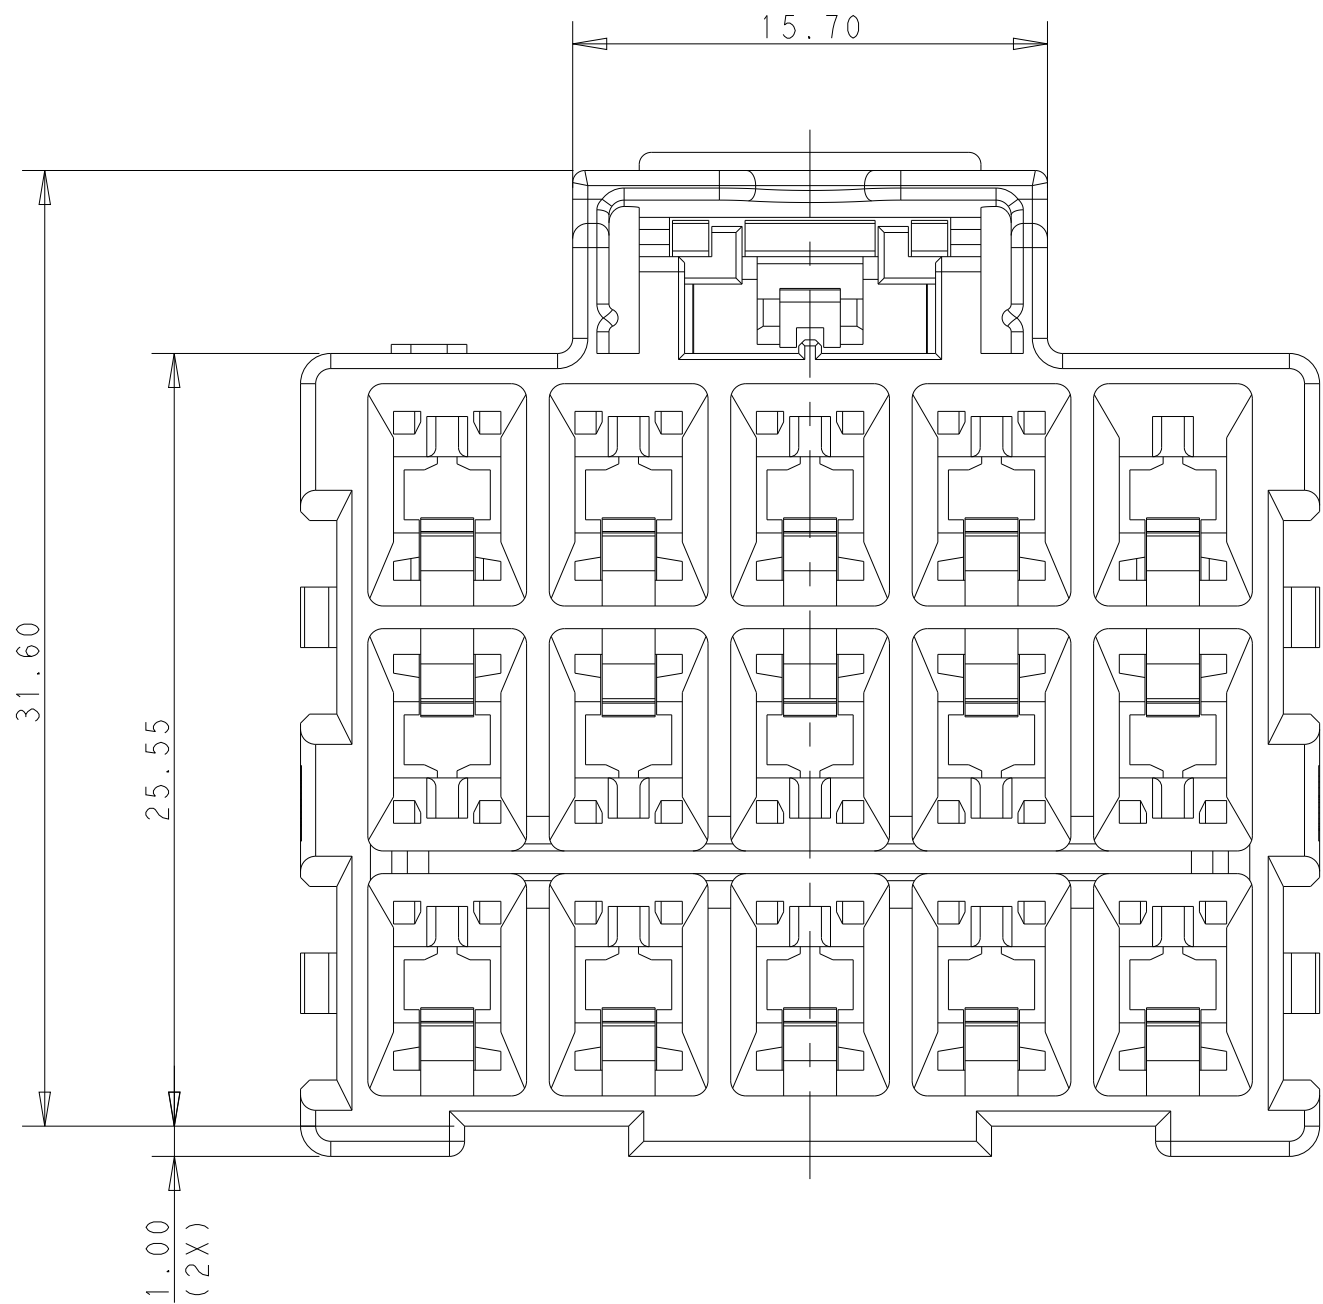


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REVISED PER ECR-21-100678	08APR2021	SS	VS
F		REVISED PER ECR-20-100915	28APR2021	JP	VS

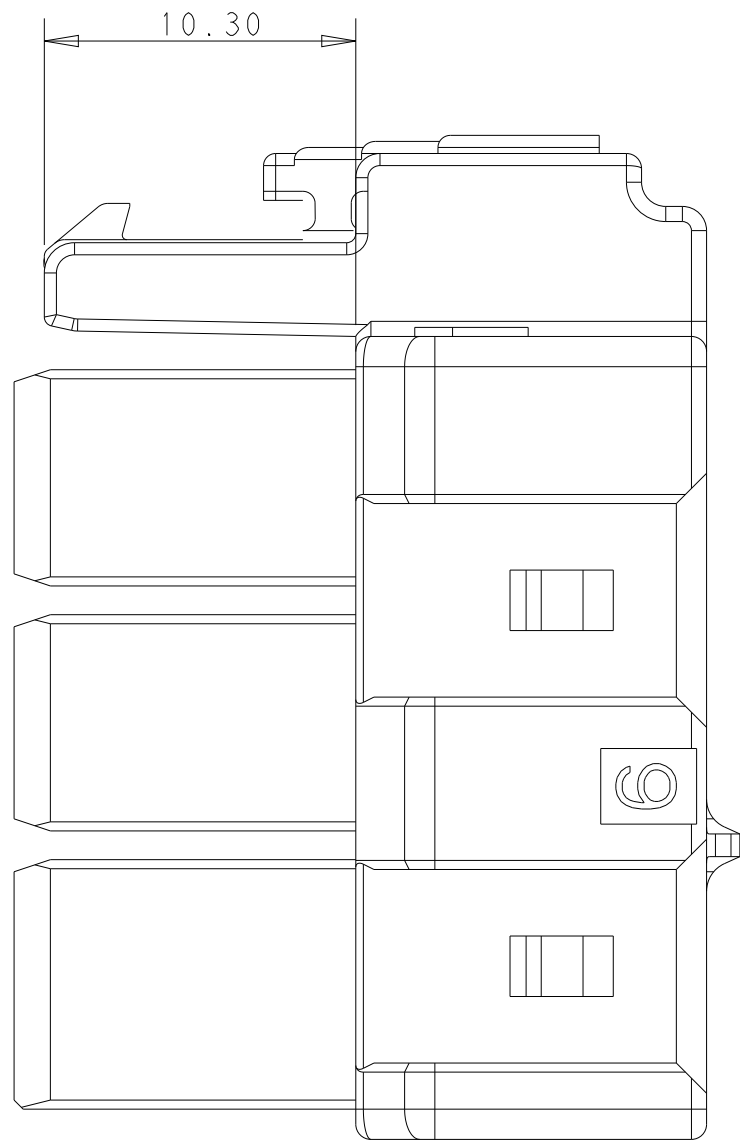



POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

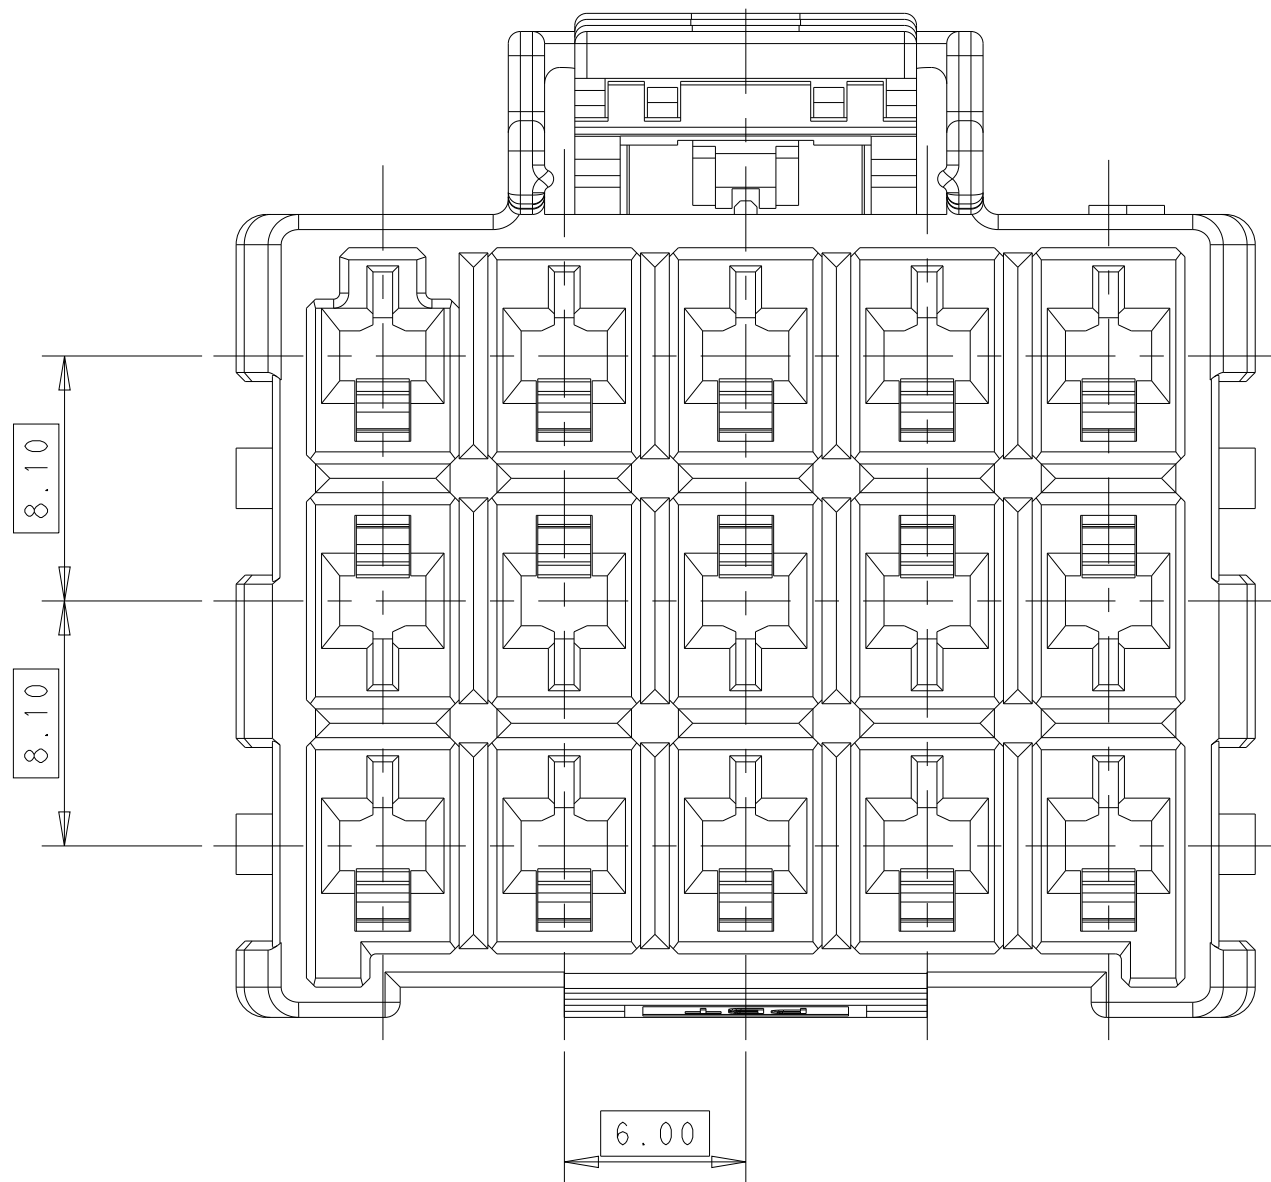



- ⚠ MATERIAL:
LEVEL 1: PBT, STANDARD TEMPERATURE 105°C
KEY A: NATURAL; KEY B: PURPLE; KEY C: BLUE; KEY D: YELLOW
LEVEL 2: PA66, HIGH TEMPERATURE 150°C
KEY A: LIGHT GREY; KEY B: RED; KEY C: BLACK; KEY D: NATURAL
- ⚠ MATERIAL MARK:
LEVEL 1: PBT, LEVEL 2: HDT
3. APPLICABLE CONTACT P/N
RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-*, 2238066-*
4. MATING CONN, P/N
CAP HSG: *-1971874/5-*
DOUBLE ROW LOCK PLATE: *-1971778-*; SINGLE ROW LOCK PLATE: *-1971777-*
- ⚠ GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1. THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850°C TEST AND RESIN GWIT GREATER THAN OR EQUAL TO 775°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	 TE Connectivity	
		CHK HAPYE WU 09JUL2012		
DIMENSIONS:		APVD YUHONG MAO 09JUL2012	NAME PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK	
mm		PRODUCT SPEC		
	0 PLC	±	SIZE A100779C=1971876	
	1 PLC	±0.35		
	2 PLC	±0.25		
	3 PLC	±		
	4 PLC	±	RESTRICTED TO -	
	ANGLES	±		
MATERIAL	FINISH	-	SCALE 3:1 SHEET 1 OF 2 REV F	
		-		
		Customer Drawing		



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

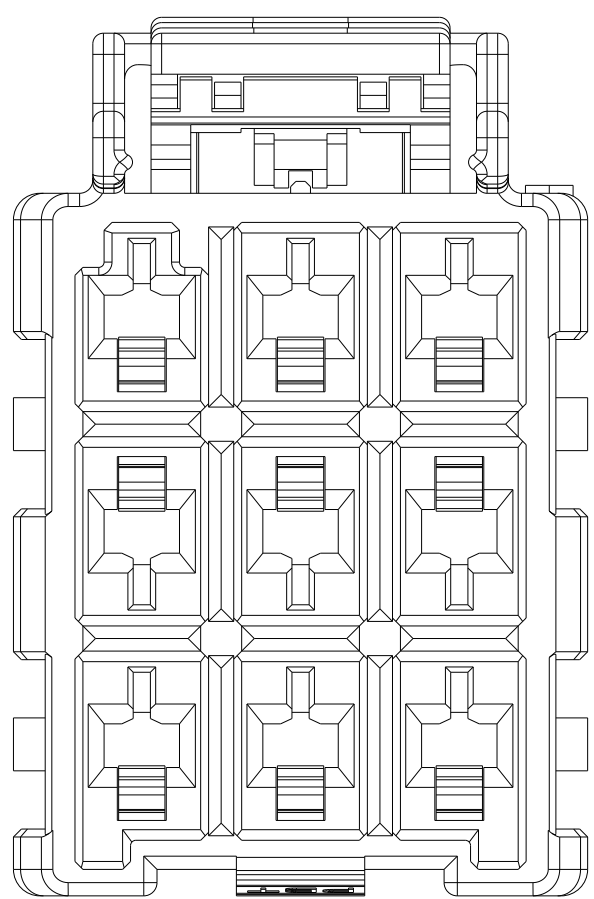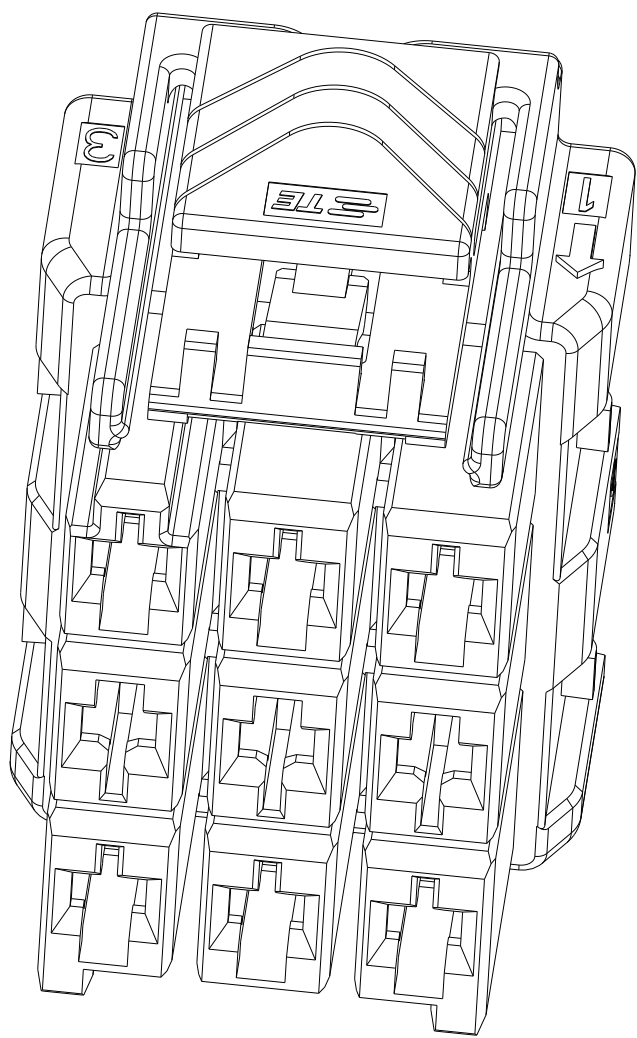

3*3 POSITIONS

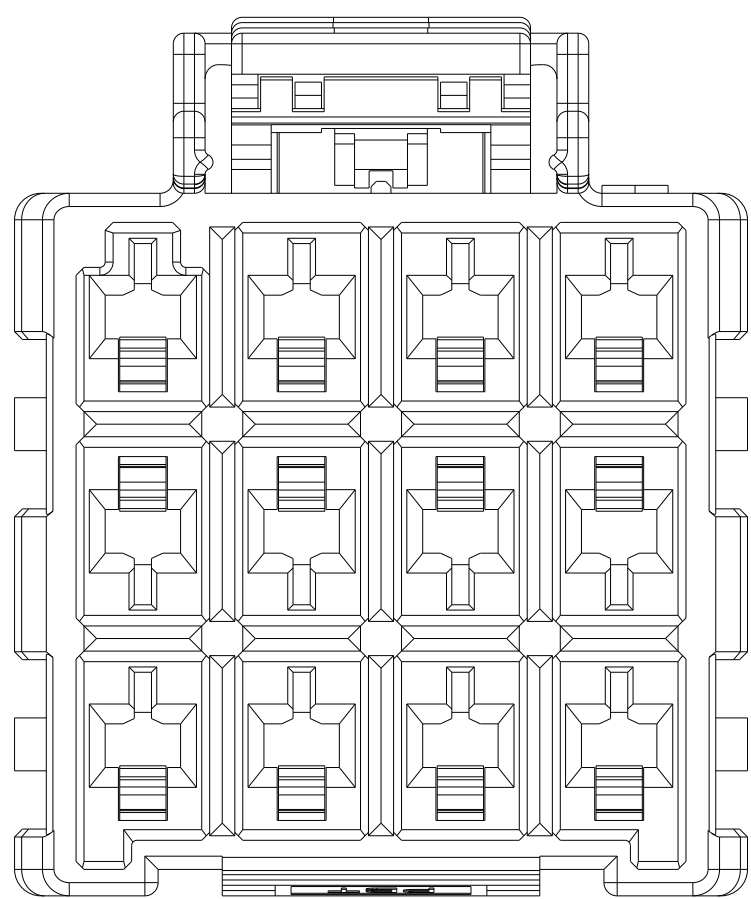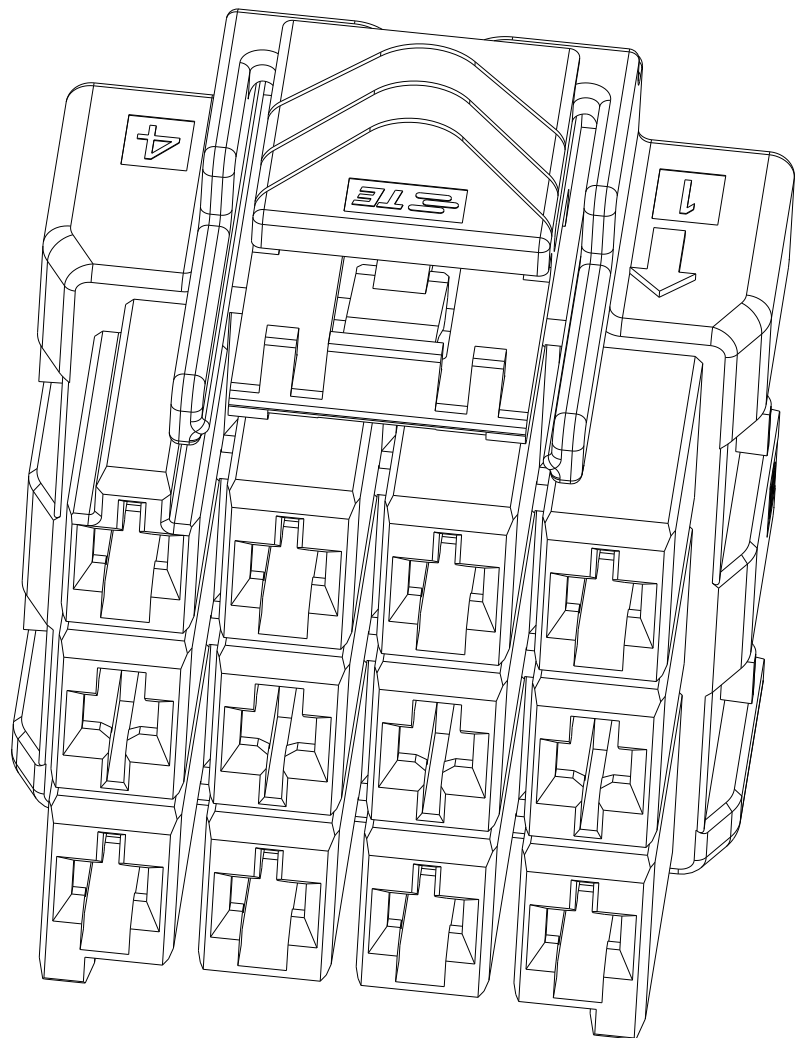


3*4 POSITIONS

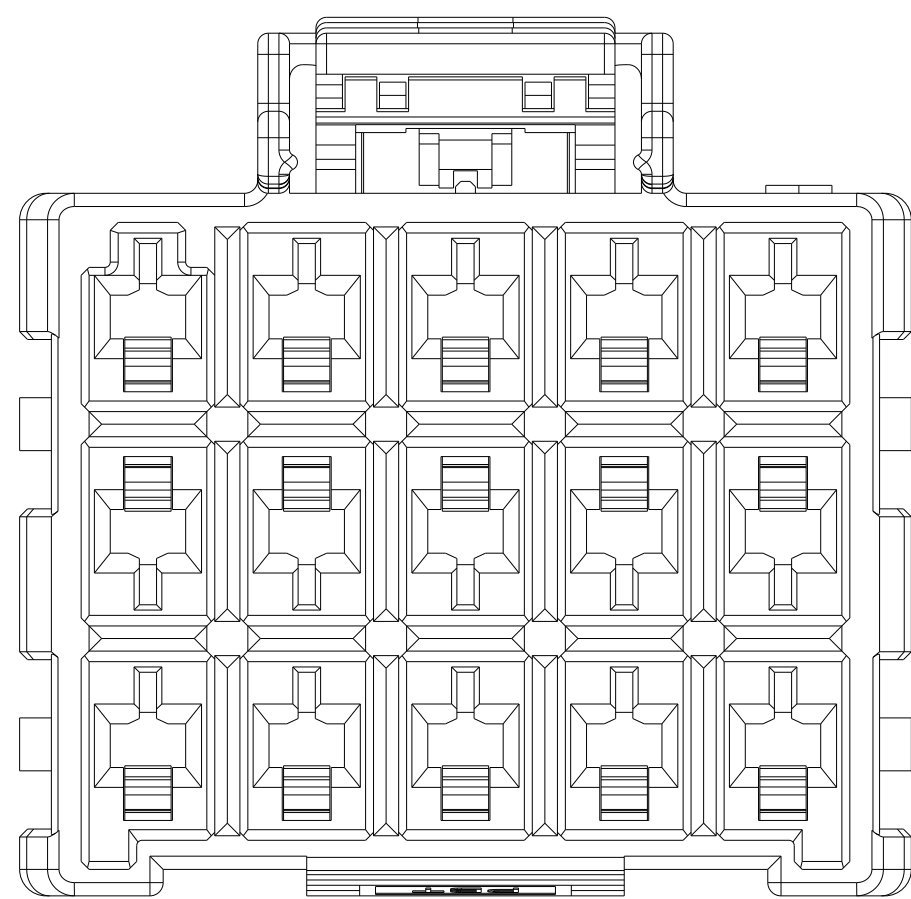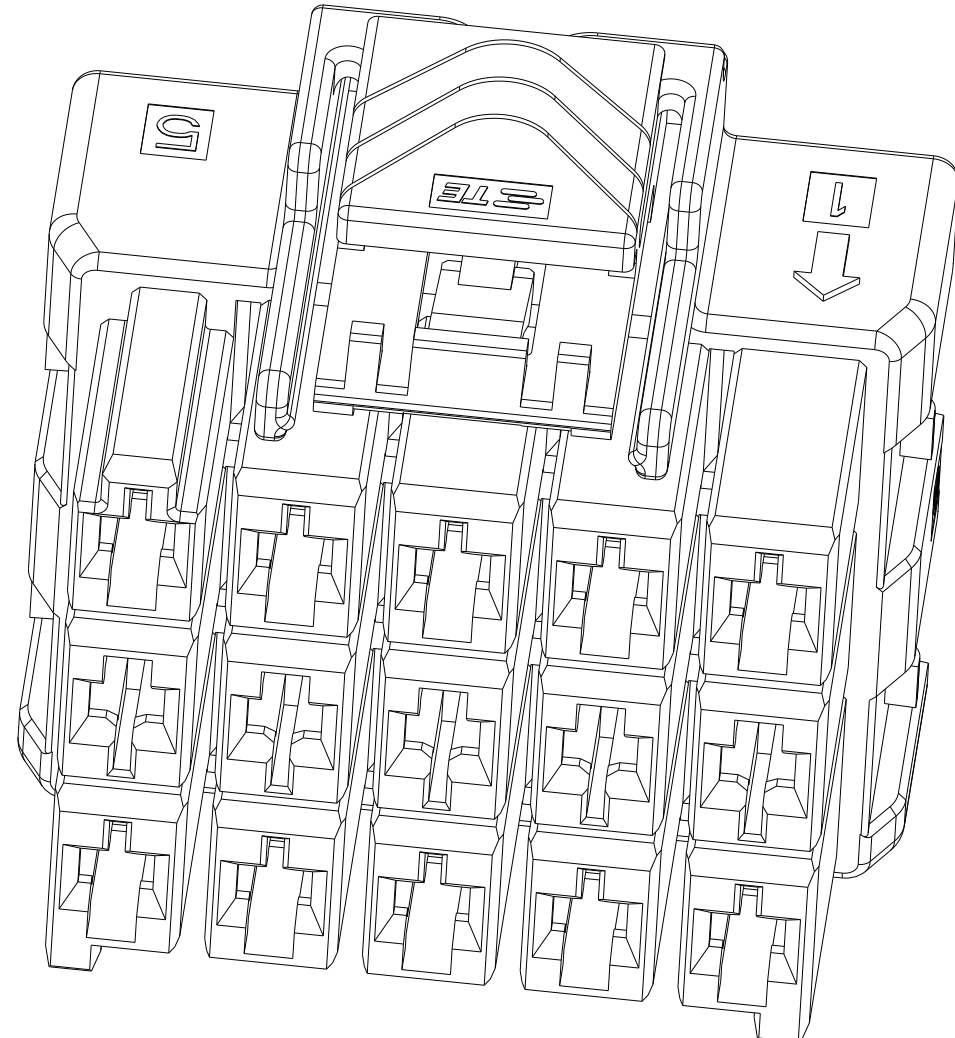


3*5 POSITIONS


3*5	LEVEL 1	KEY A	1-1971876-7
		KEY B	2-1971876-7
		KEY C	3-1971876-7
		KEY D	4-1971876-7
3*4	LEVEL 2 △5	KEY A	5-1971876-7
		KEY B	6-1971876-7
		KEY C	7-1971876-7
		KEY D	8-1971876-7
3*3	LEVEL 1	KEY A	1-1971876-4
		KEY B	2-1971876-4
		KEY C	3-1971876-4
		KEY D	4-1971876-4
3*3	LEVEL 2 △5	KEY A	5-1971876-4
		KEY B	6-1971876-4
		KEY C	7-1971876-4
		KEY D	8-1971876-4
3*3	LEVEL 1	KEY A	1-1971876-3
		KEY B	2-1971876-3
		KEY C	3-1971876-3
		KEY D	4-1971876-3
3*3	LEVEL 2 △5	KEY A	5-1971876-3
		KEY B	6-1971876-3
		KEY C	7-1971876-3
		KEY D	8-1971876-3
POS.	MATERIAL	KEY	P/N

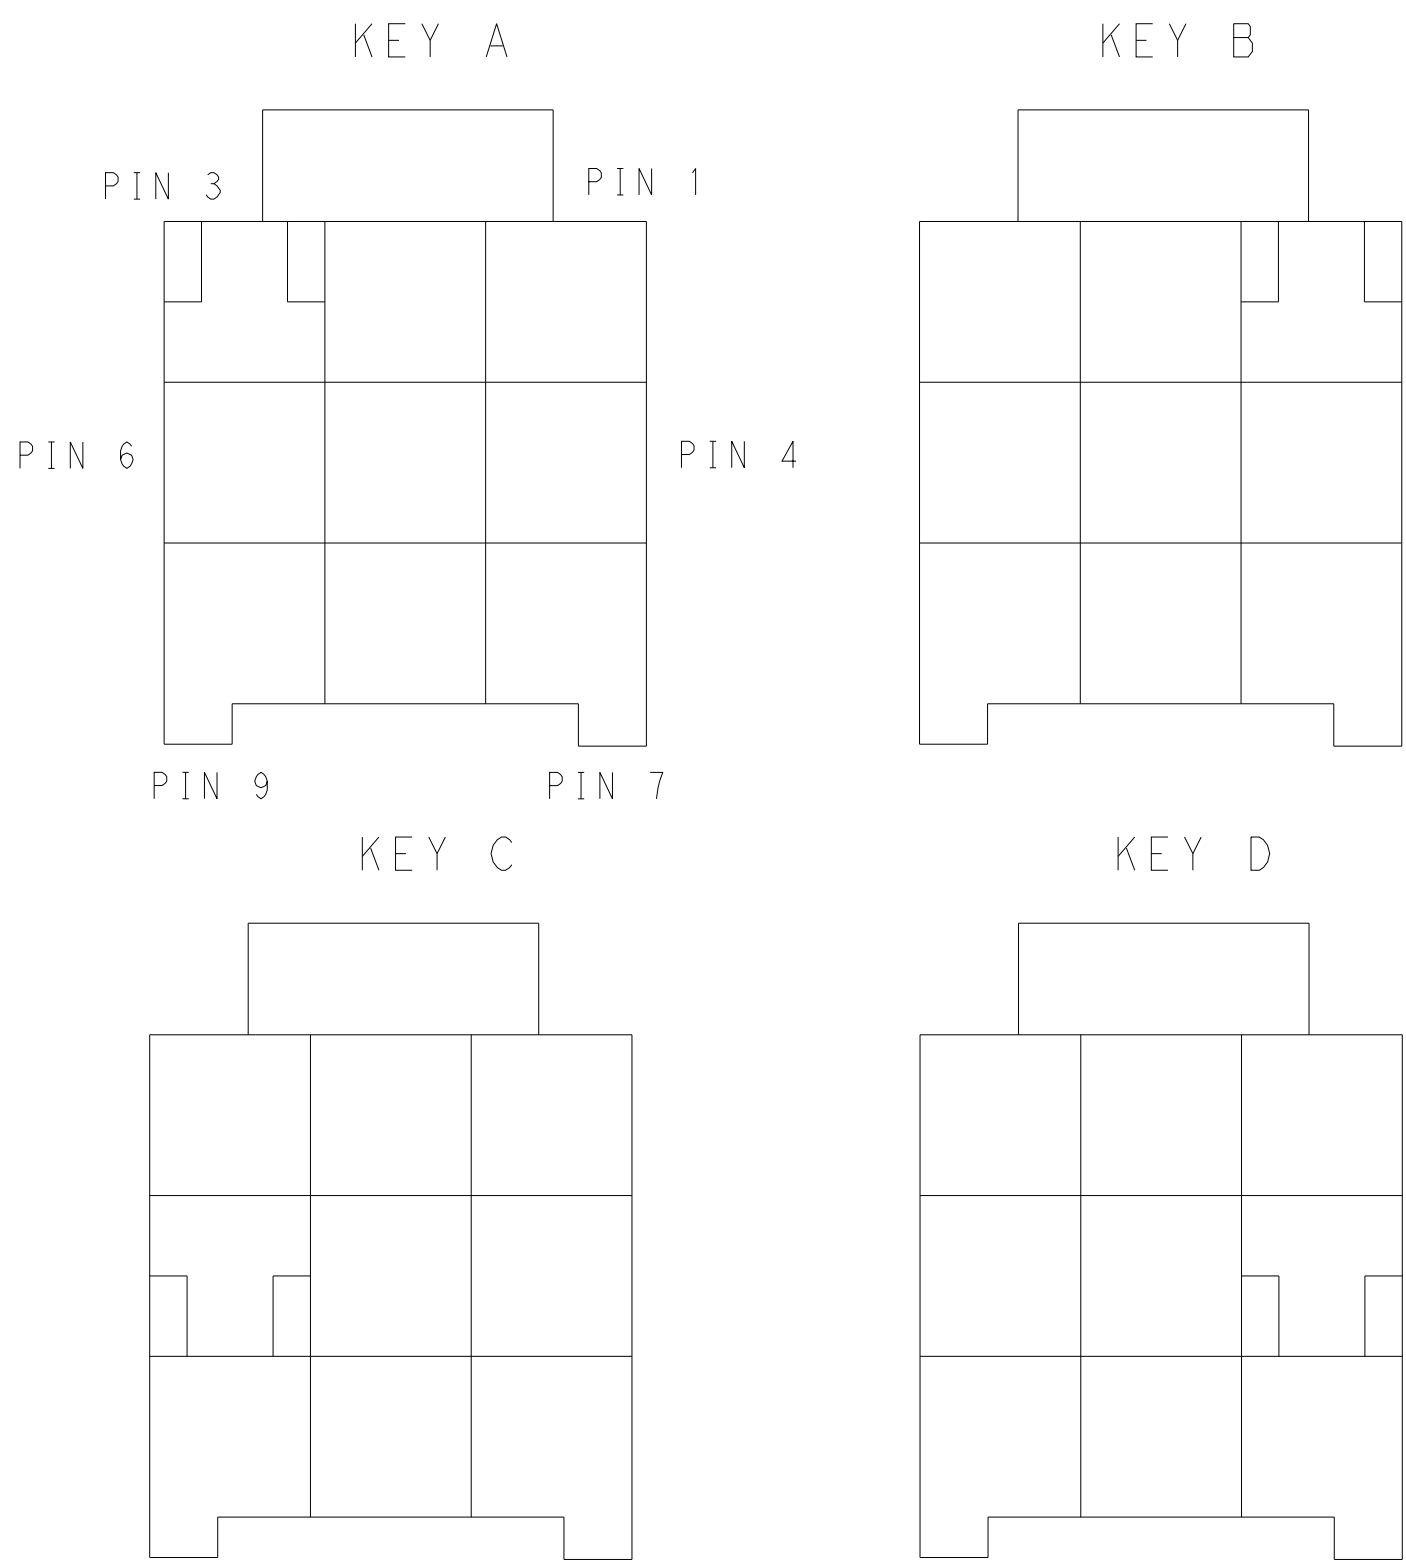

KEYING FOR 3*3 POS.

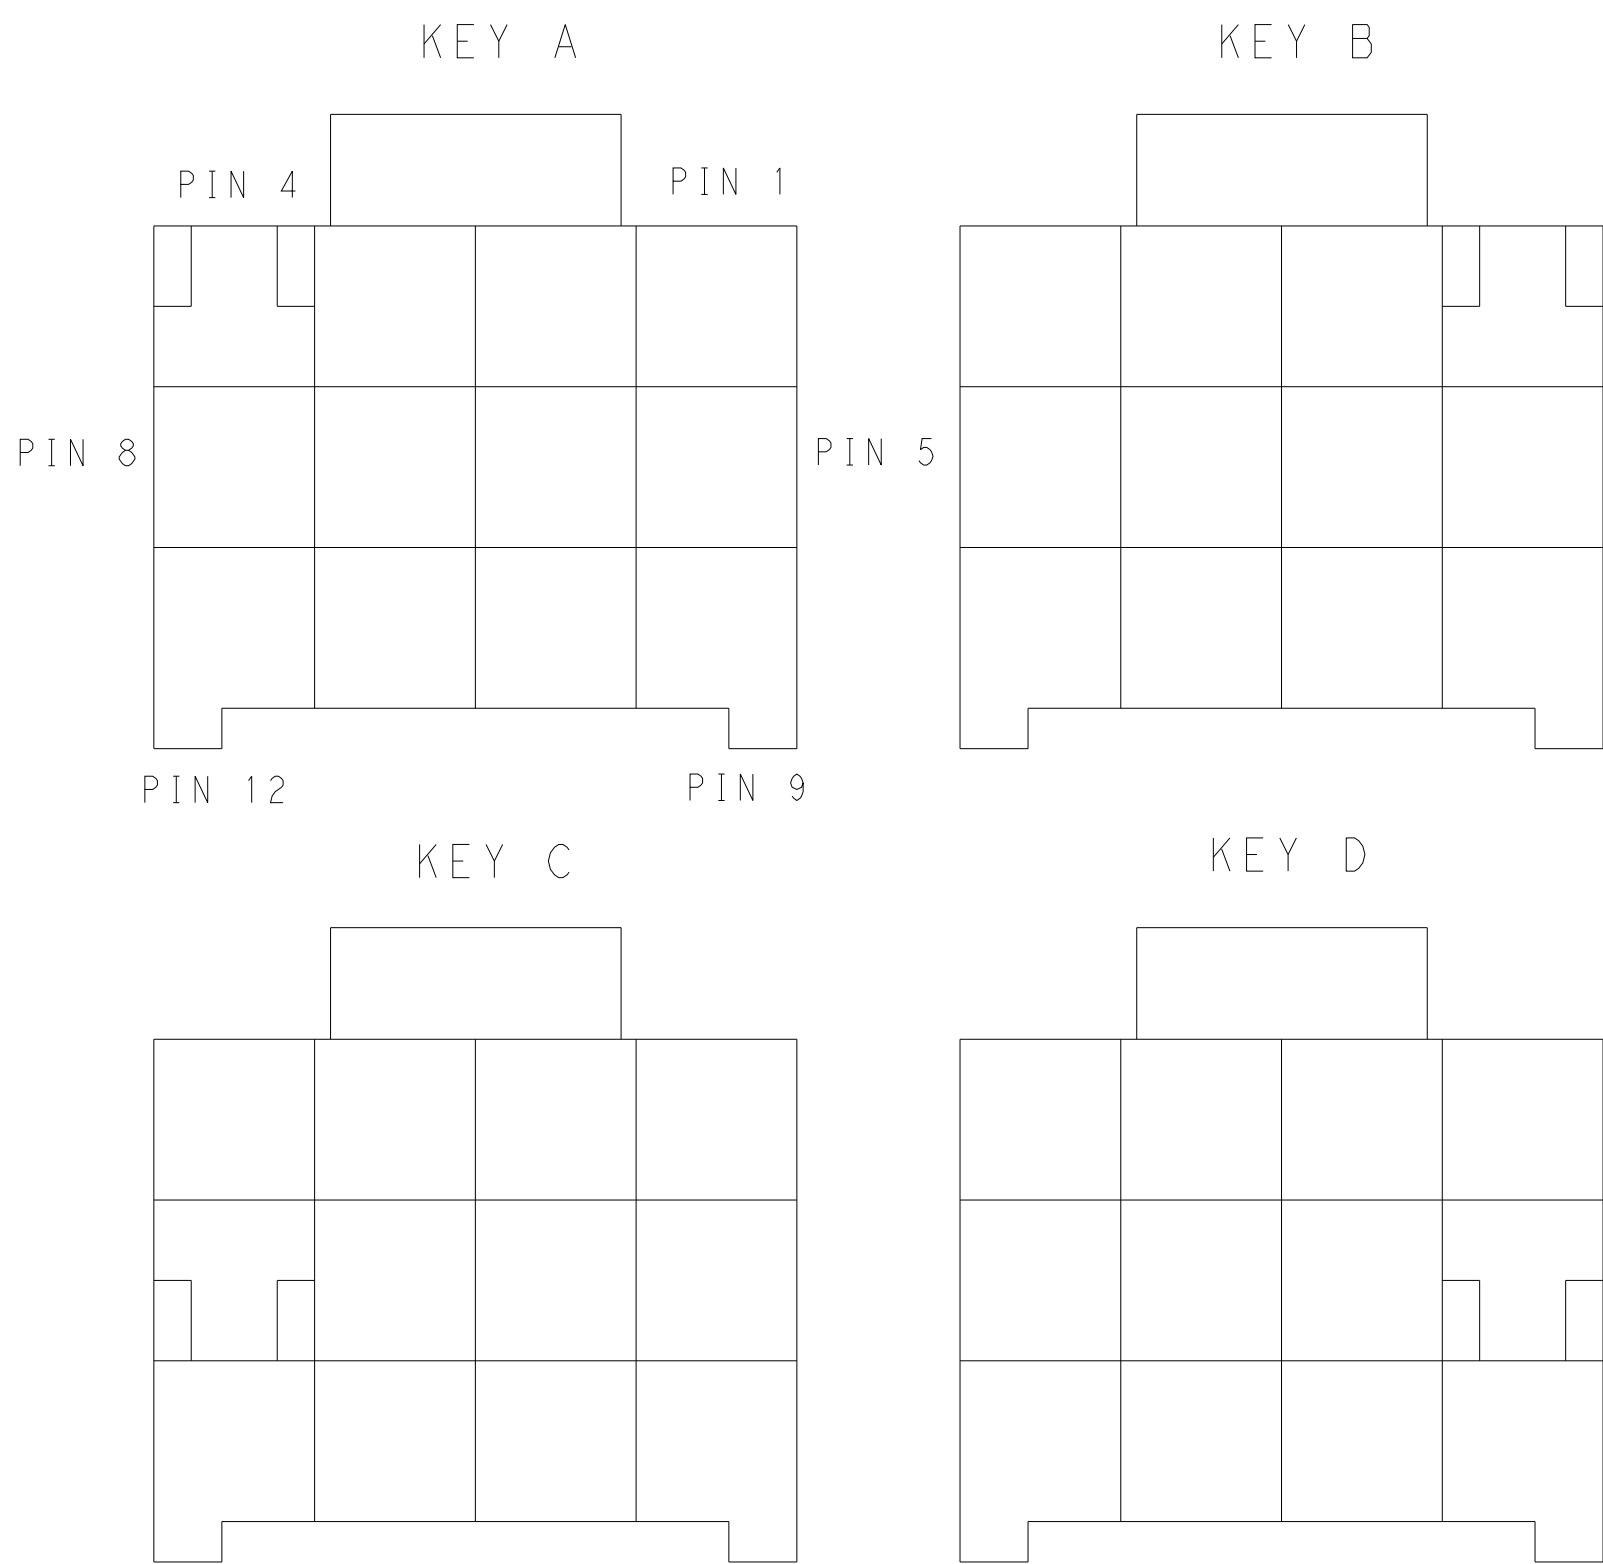

KEYING FOR 3*4 POS.

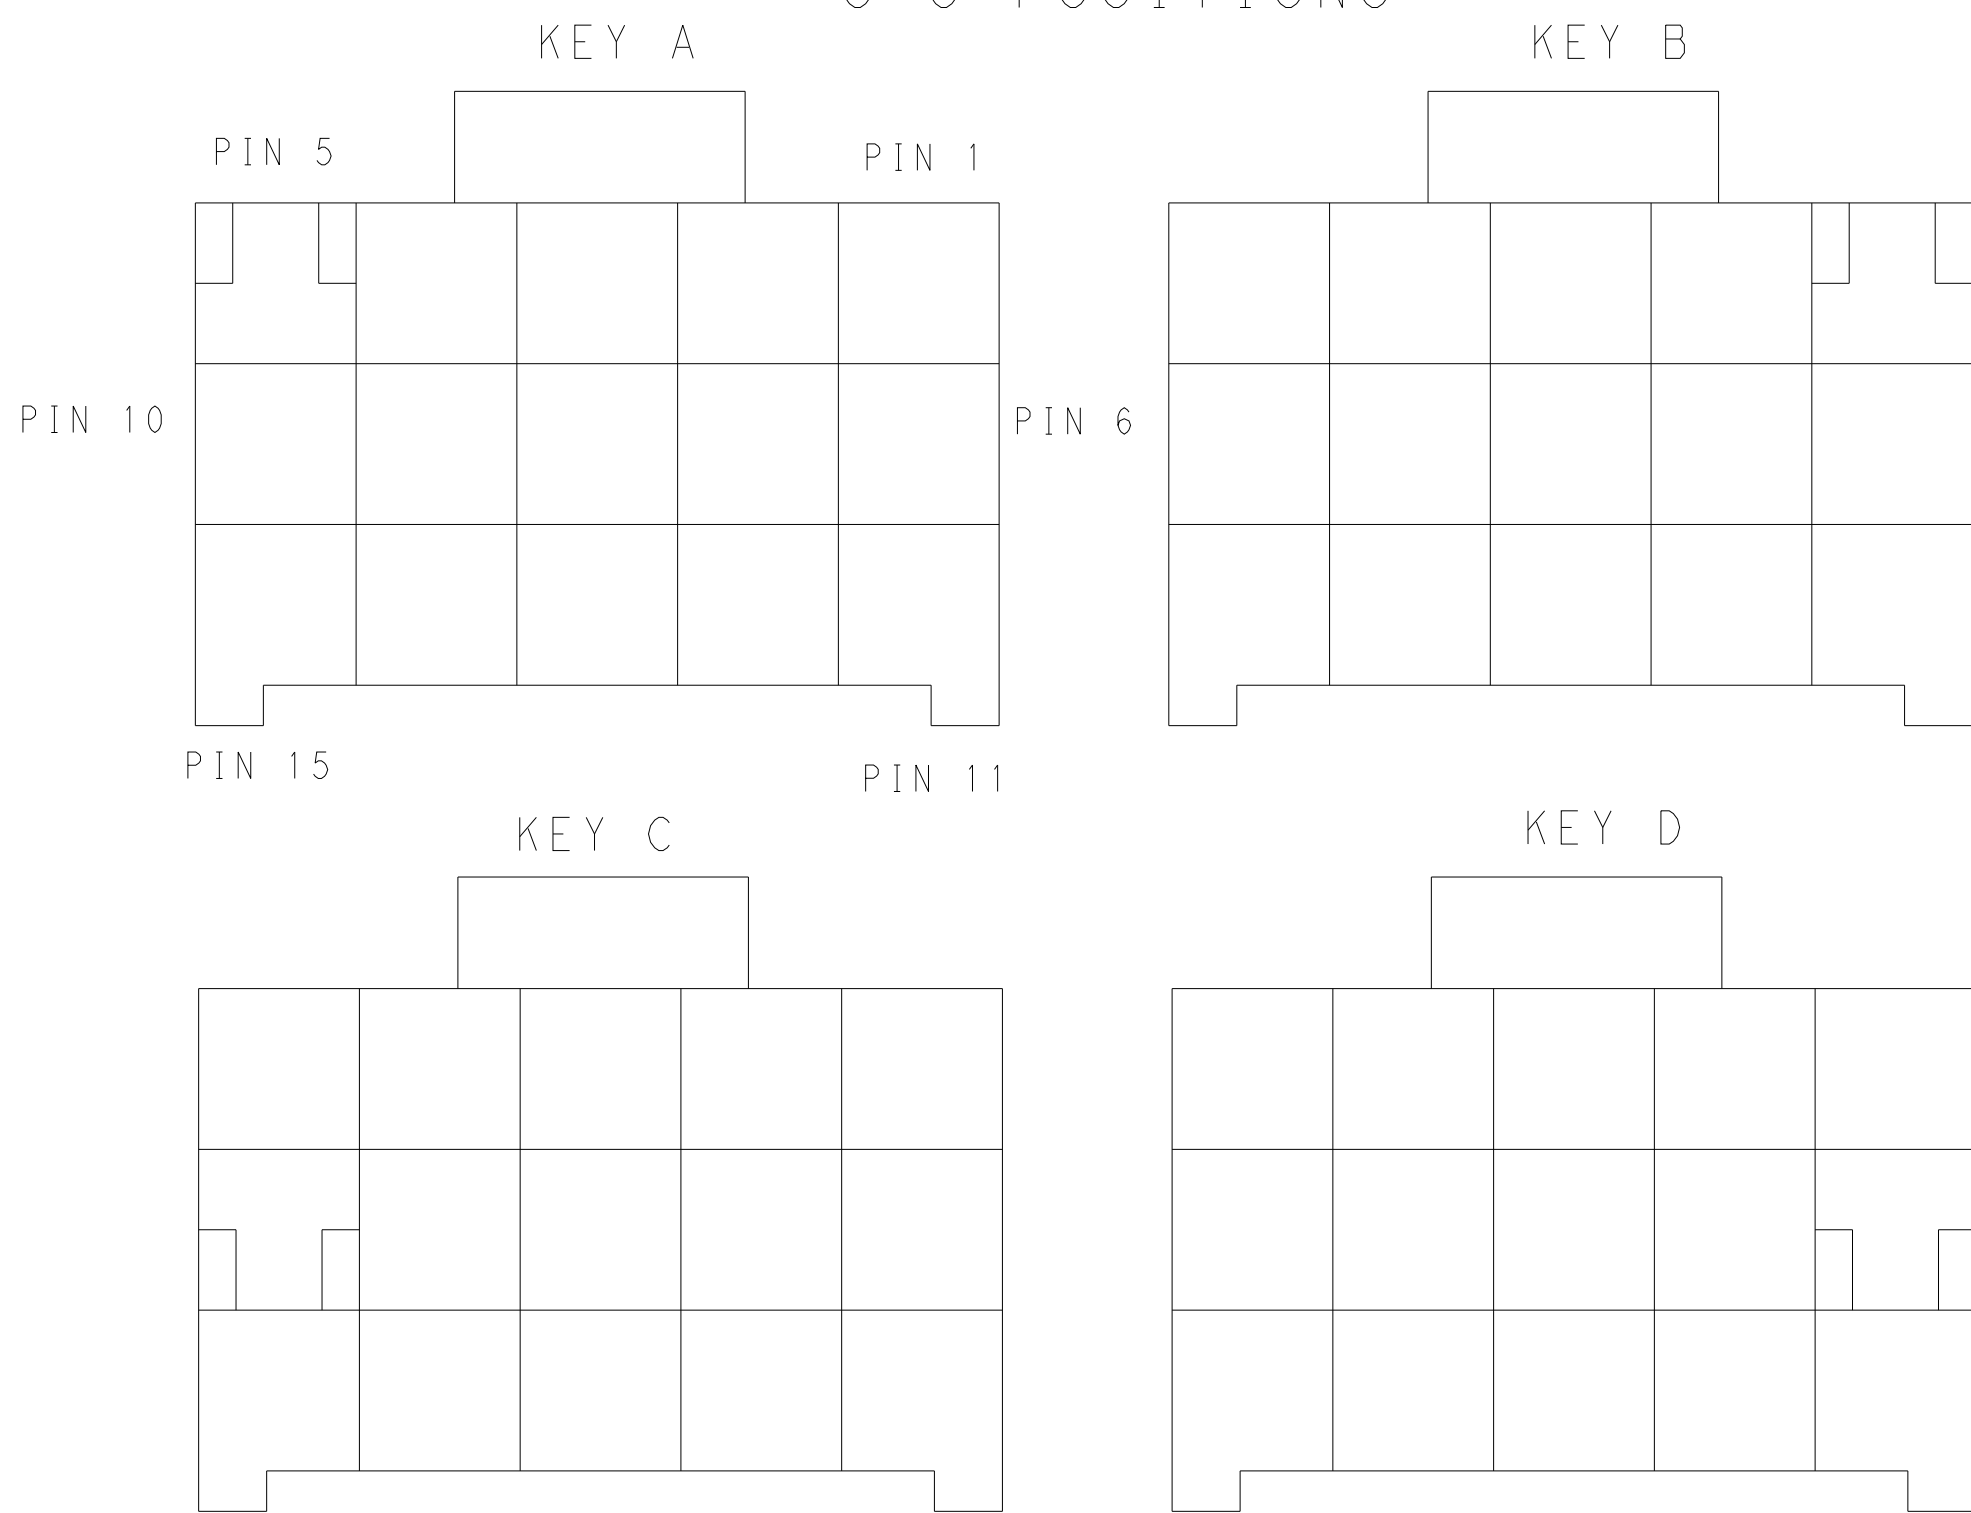

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	TOMMY WU		09JUL2012		 TE Connectivity		
DIMENSIONS: mm				CHK	HAPYE WU		09JUL2012				
				APVD	YUHONG MAO		09JUL2012				
				PRODUCT SPEC							
				APPLICATION SPEC				NAME	PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK		
				108-106118							
				114-106118							
MATERIAL				WEIGHT				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
-				-				A1	100779	C=1971876	-
-				-				Customer Drawing			
-				-				SCALE		SHEET	
-				-				2		OF 2	
-				-				REV		F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-1971876-4](#)