

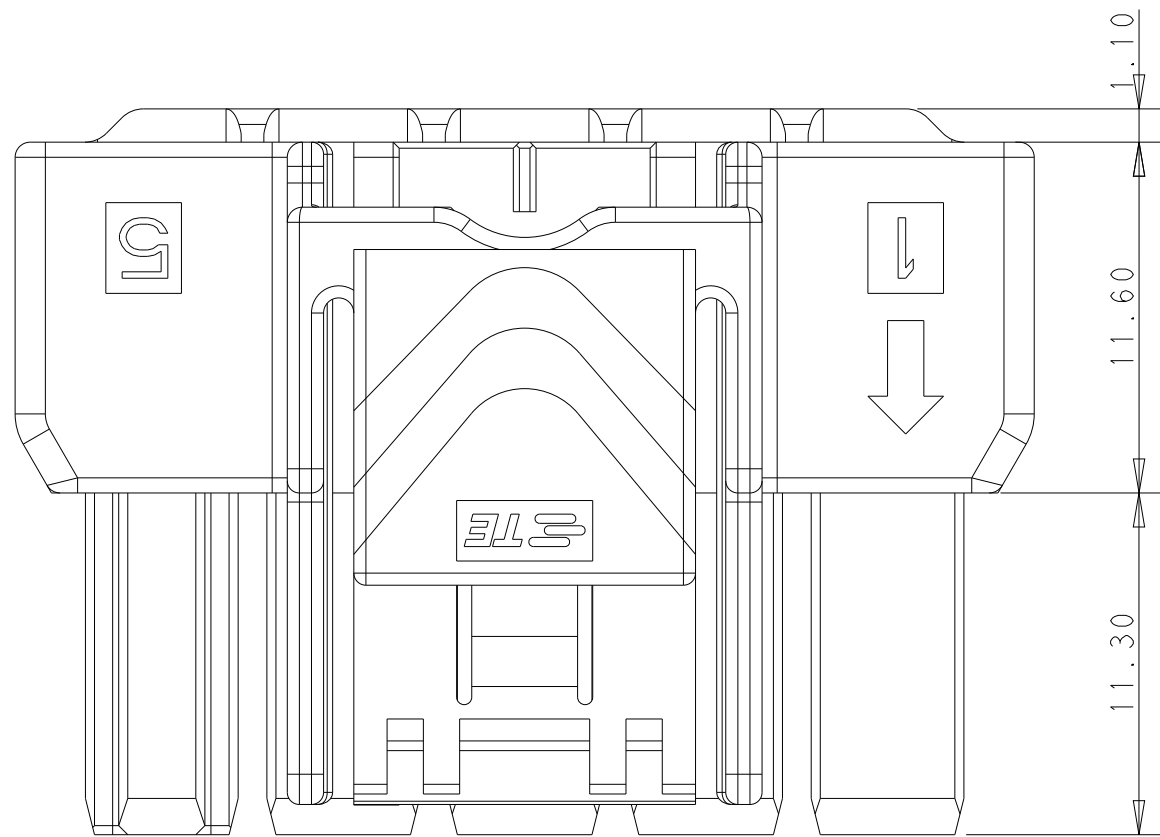
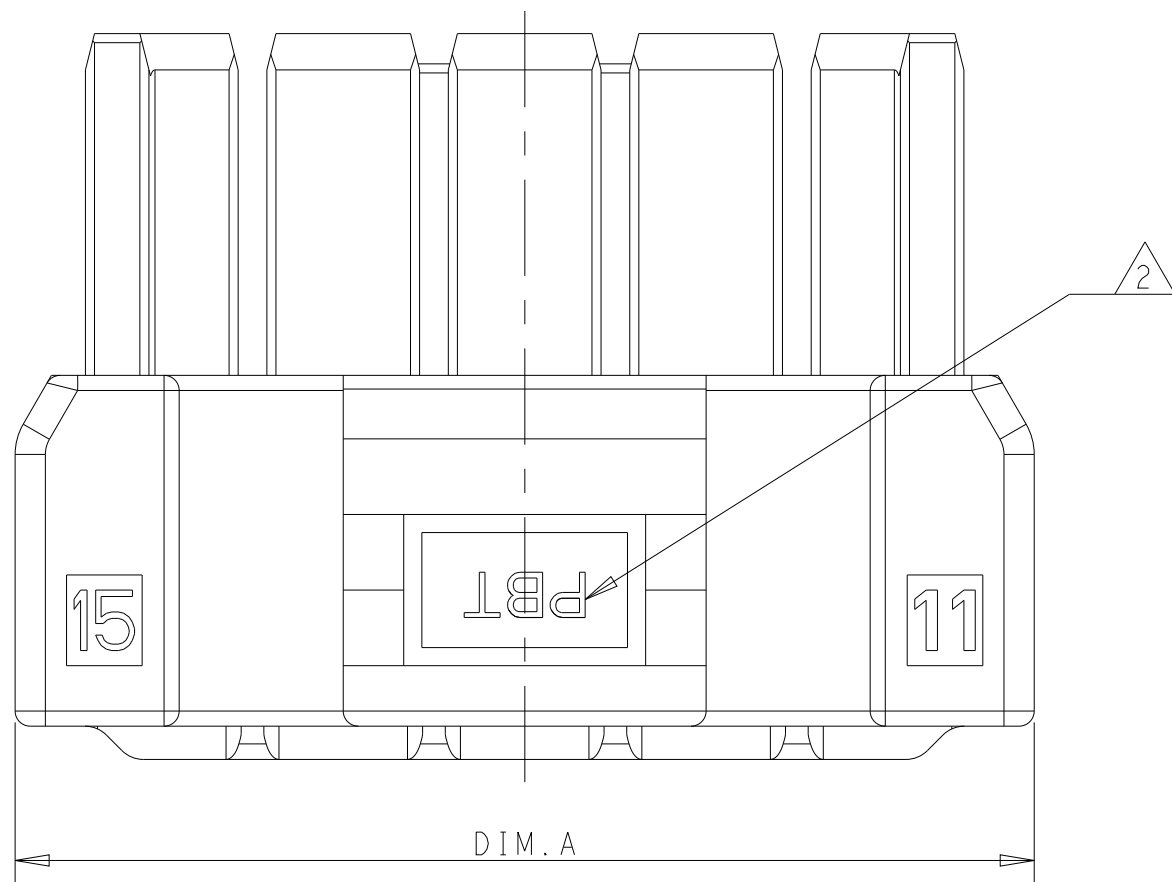
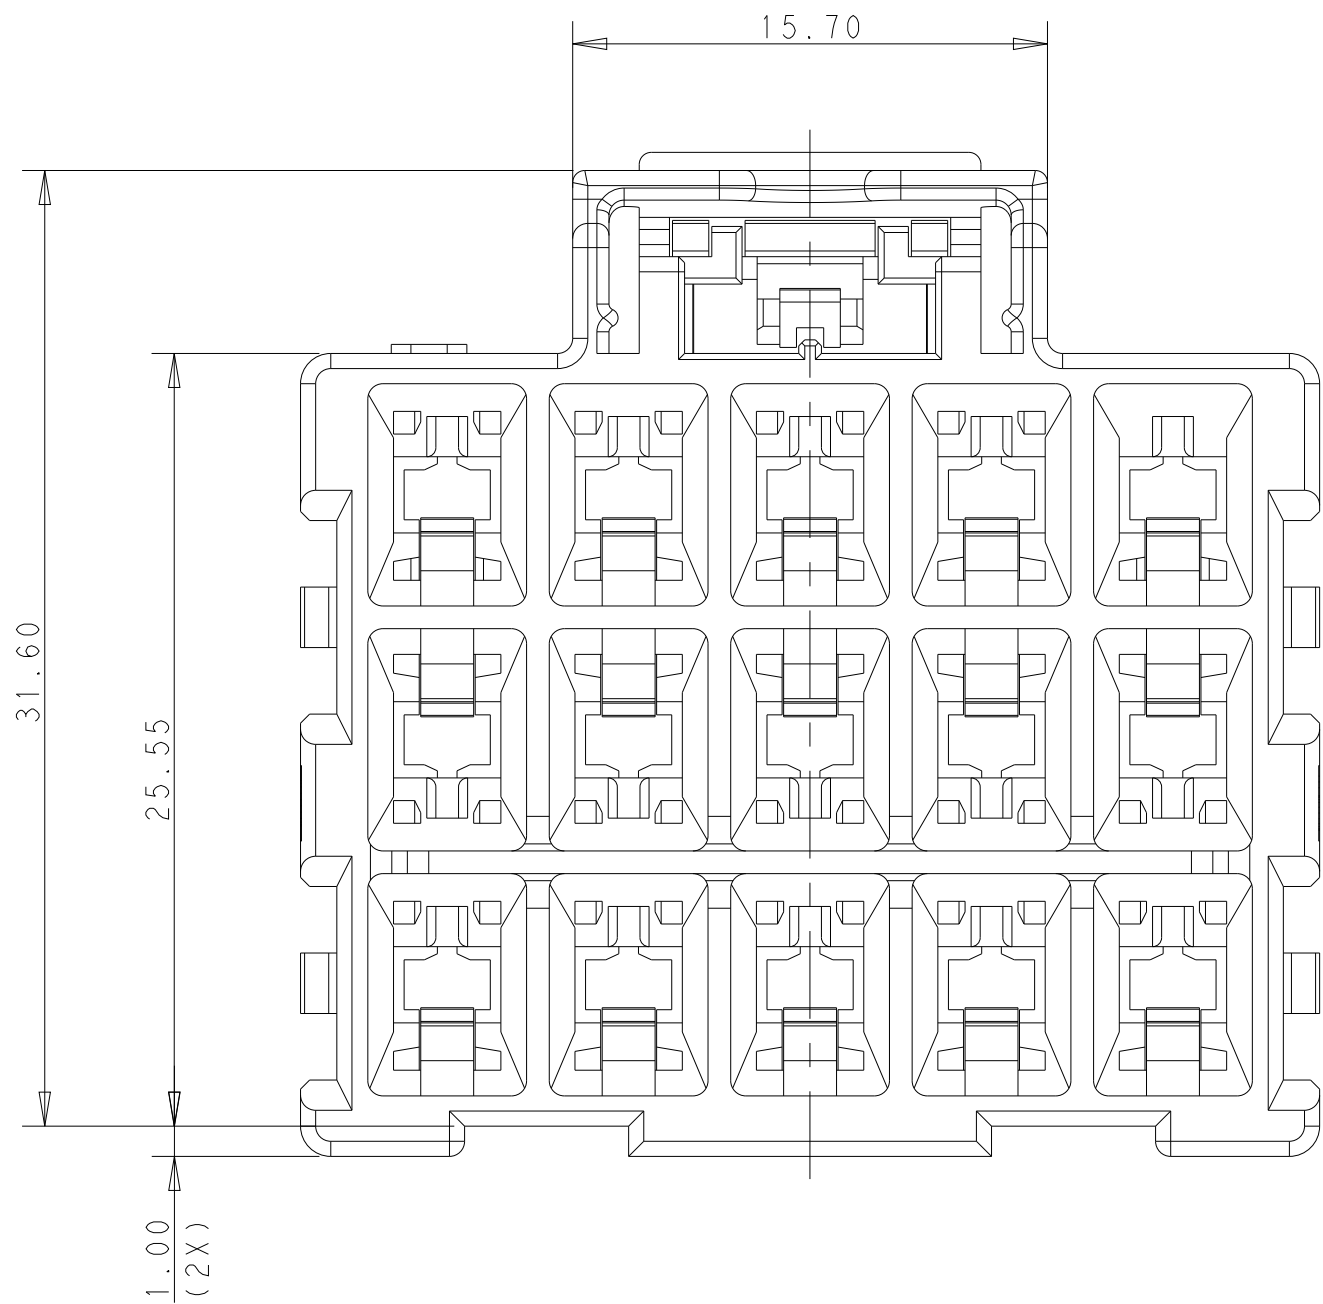


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REVISED PER ECR-21-100678	08APR2021	SS	VS
F		REVISED PER ECR-20-100915	28APR2021	JP	VS

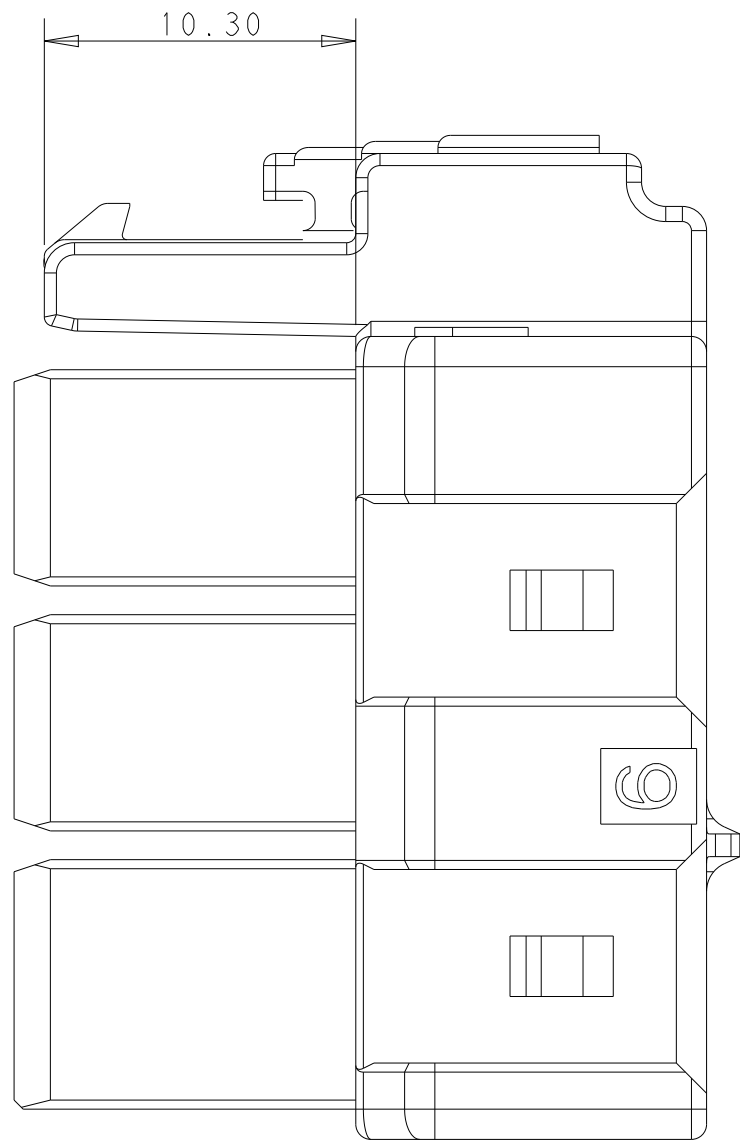



POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

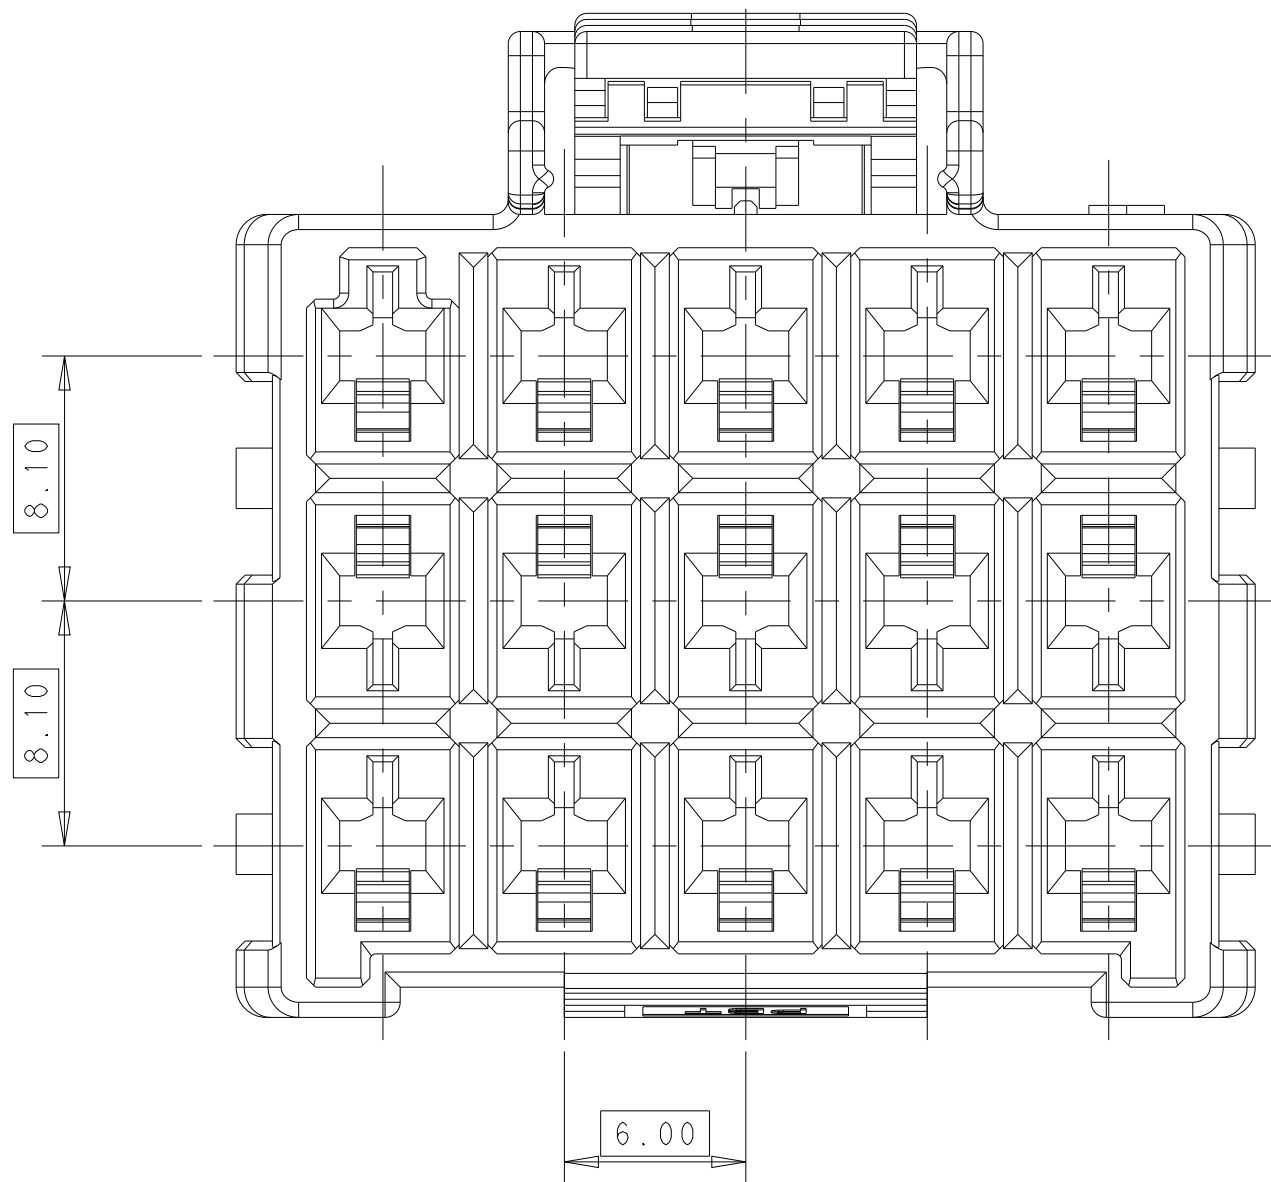



- ⚠ MATERIAL:
LEVEL 1: PBT, STANDARD TEMPERATURE 105°C
KEY A: NATURAL; KEY B: PURPLE; KEY C: BLUE; KEY D: YELLOW
LEVEL 2: PA66, HIGH TEMPERATURE 150°C
KEY A: LIGHT GREY; KEY B: RED; KEY C: BLACK; KEY D: NATURAL
- ⚠ MATERIAL MARK:
LEVEL 1: PBT, LEVEL 2: HDT
3. APPLICABLE CONTACT P/N
RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-*, 2238066-*
4. MATING CONN, P/N
CAP HSG: *-1971874/5-*
DOUBLE ROW LOCK PLATE: *-1971778-*; SINGLE ROW LOCK PLATE: *-1971777-*
- ⚠ GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1. THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850°C TEST AND RESIN GWIT GREATER THAN OR EQUAL TO 775°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU	09JUL2012	 TE Connectivity	
		CHK HAPYE WU	09JUL2012		
DIMENSIONS:		APVD YUHONG MAO	09JUL2012	NAME PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK	
mm		PRODUCT SPEC			
		108-106118		SIZE A1	
		APPLICATION SPEC			
		114-106118			
		FINISH			
		WEIGHT			
MATERIAL		Customer Drawing		DRAWING NO 100779C-1971876	
		SCALE		RESTRICTED TO	
		3:1		-	
		SHEET		1 OF 2	
				REV F	



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

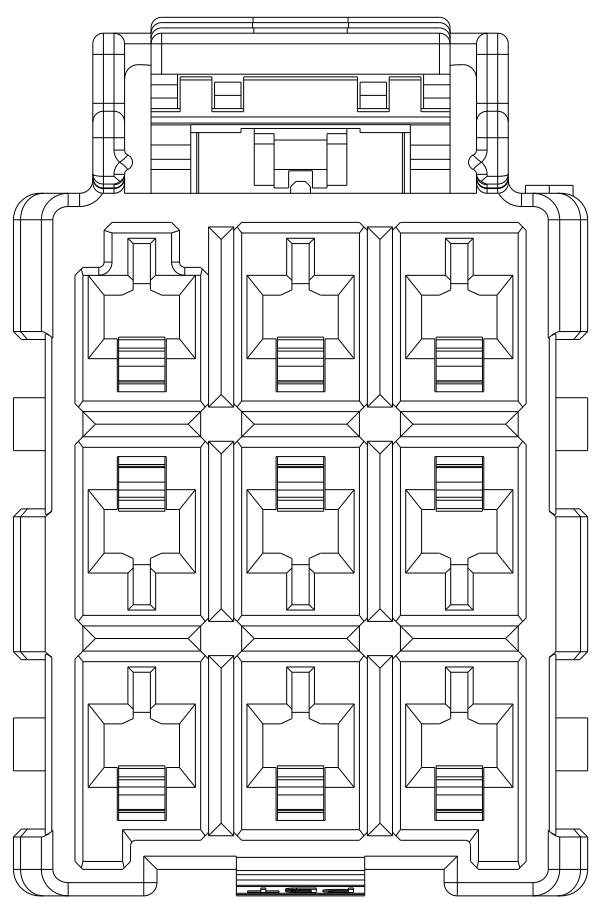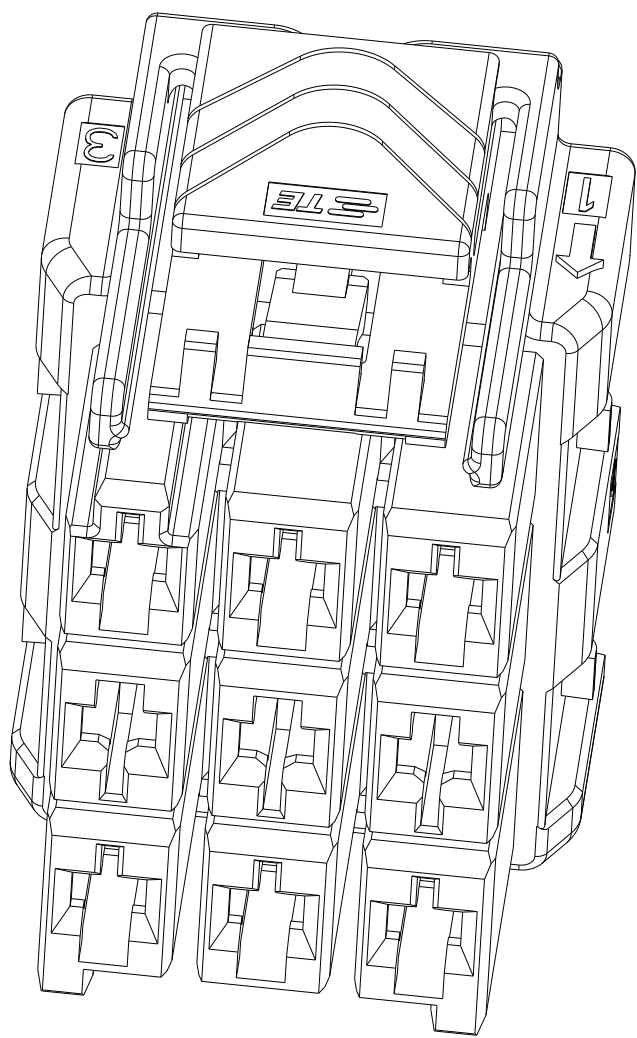

3*3 POSITIONS

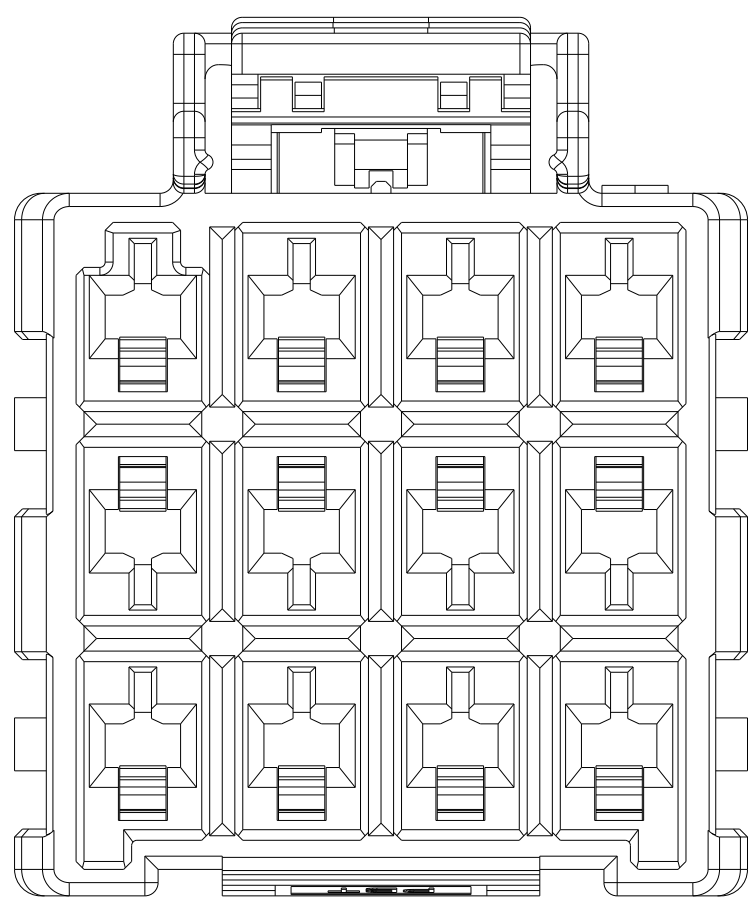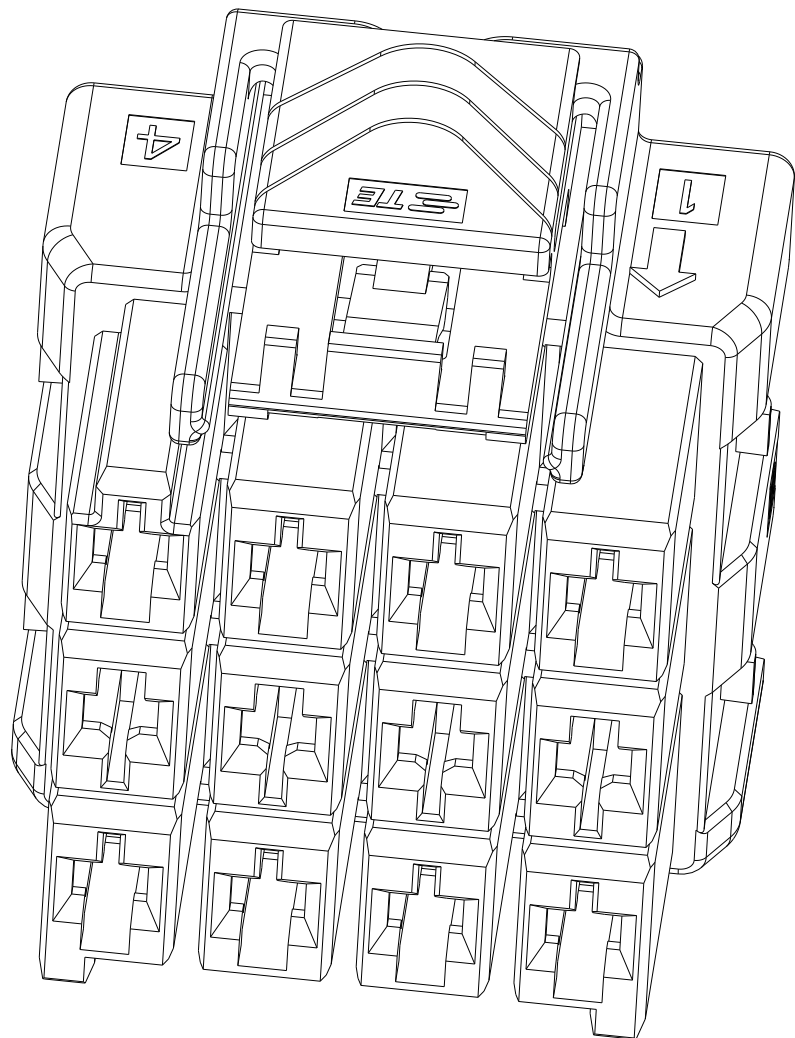


3*4 POSITIONS

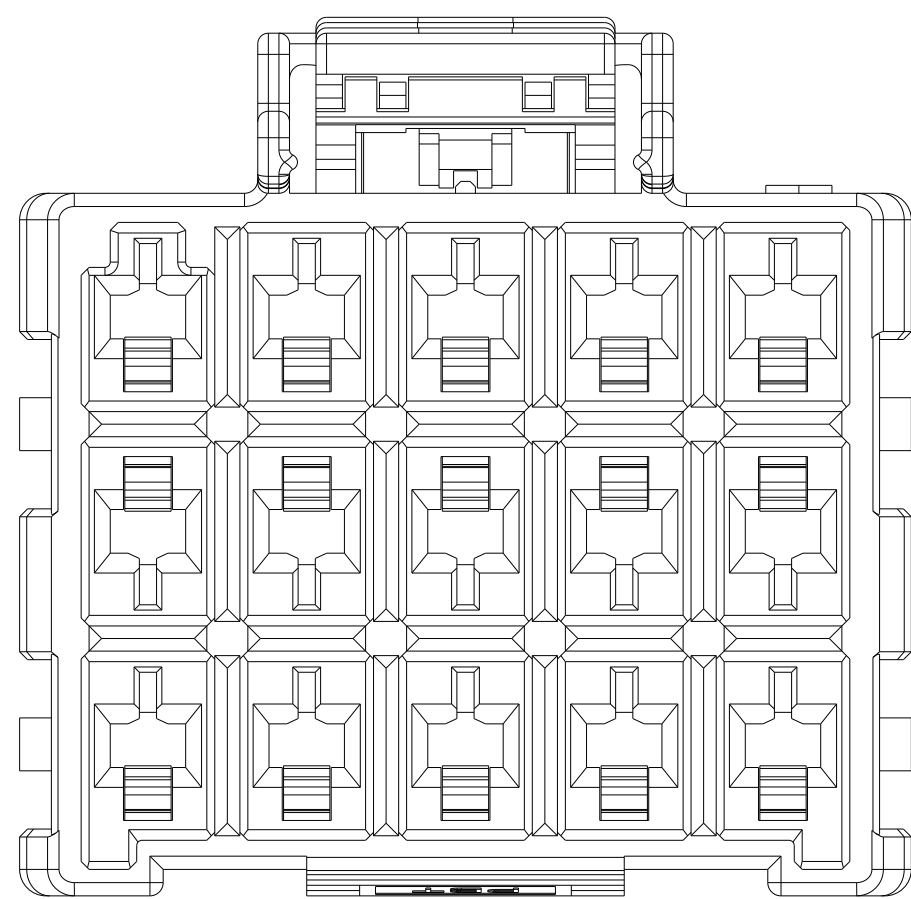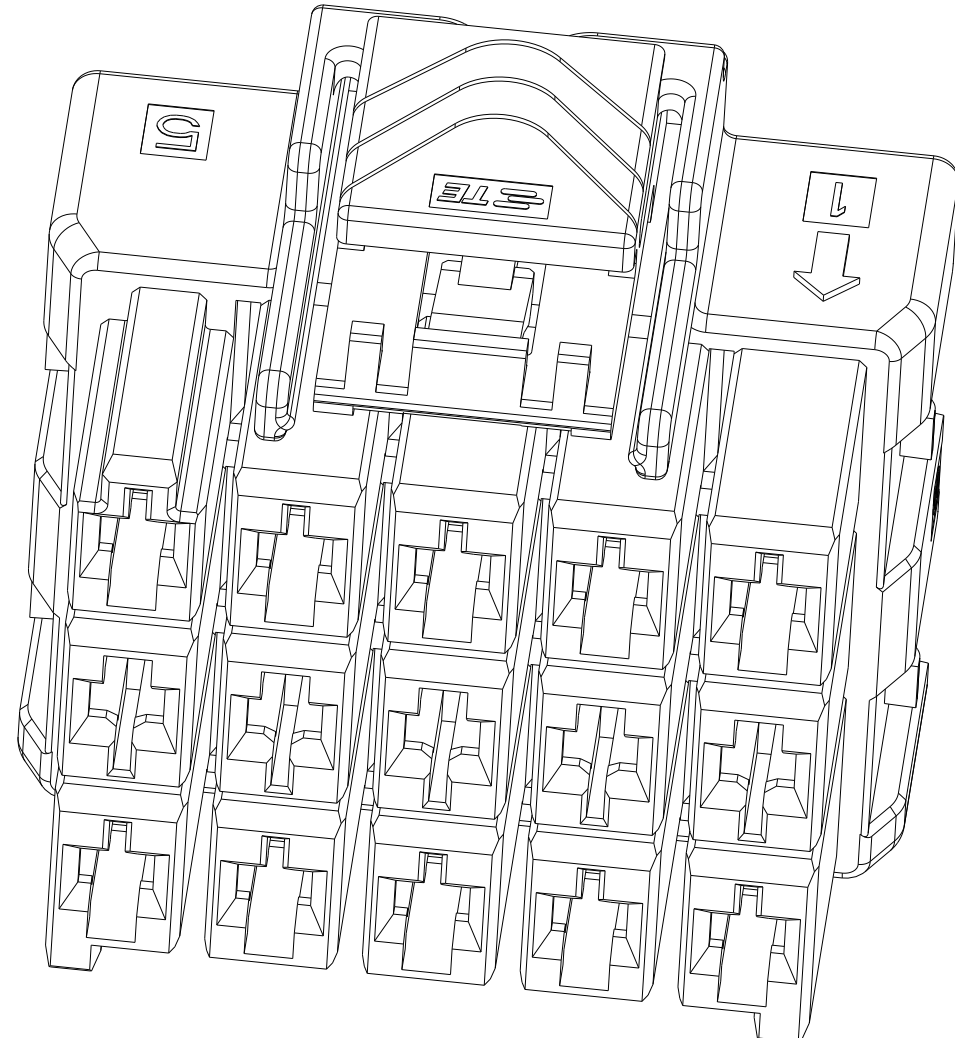


3*5 POSITIONS


3*5	LEVEL 1	KEY A	1-1971876-7
		KEY B	2-1971876-7
		KEY C	3-1971876-7
		KEY D	4-1971876-7
3*4	LEVEL 2 △5	KEY A	5-1971876-7
		KEY B	6-1971876-7
		KEY C	7-1971876-7
		KEY D	8-1971876-7
3*3	LEVEL 1	KEY A	1-1971876-4
		KEY B	2-1971876-4
		KEY C	3-1971876-4
		KEY D	4-1971876-4
3*3	LEVEL 2 △5	KEY A	5-1971876-4
		KEY B	6-1971876-4
		KEY C	7-1971876-4
		KEY D	8-1971876-4
3*3	LEVEL 1	KEY A	1-1971876-3
		KEY B	2-1971876-3
		KEY C	3-1971876-3
		KEY D	4-1971876-3
3*3	LEVEL 2 △5	KEY A	5-1971876-3
		KEY B	6-1971876-3
		KEY C	7-1971876-3
		KEY D	8-1971876-3
POS.	MATERIAL	KEY	P/N

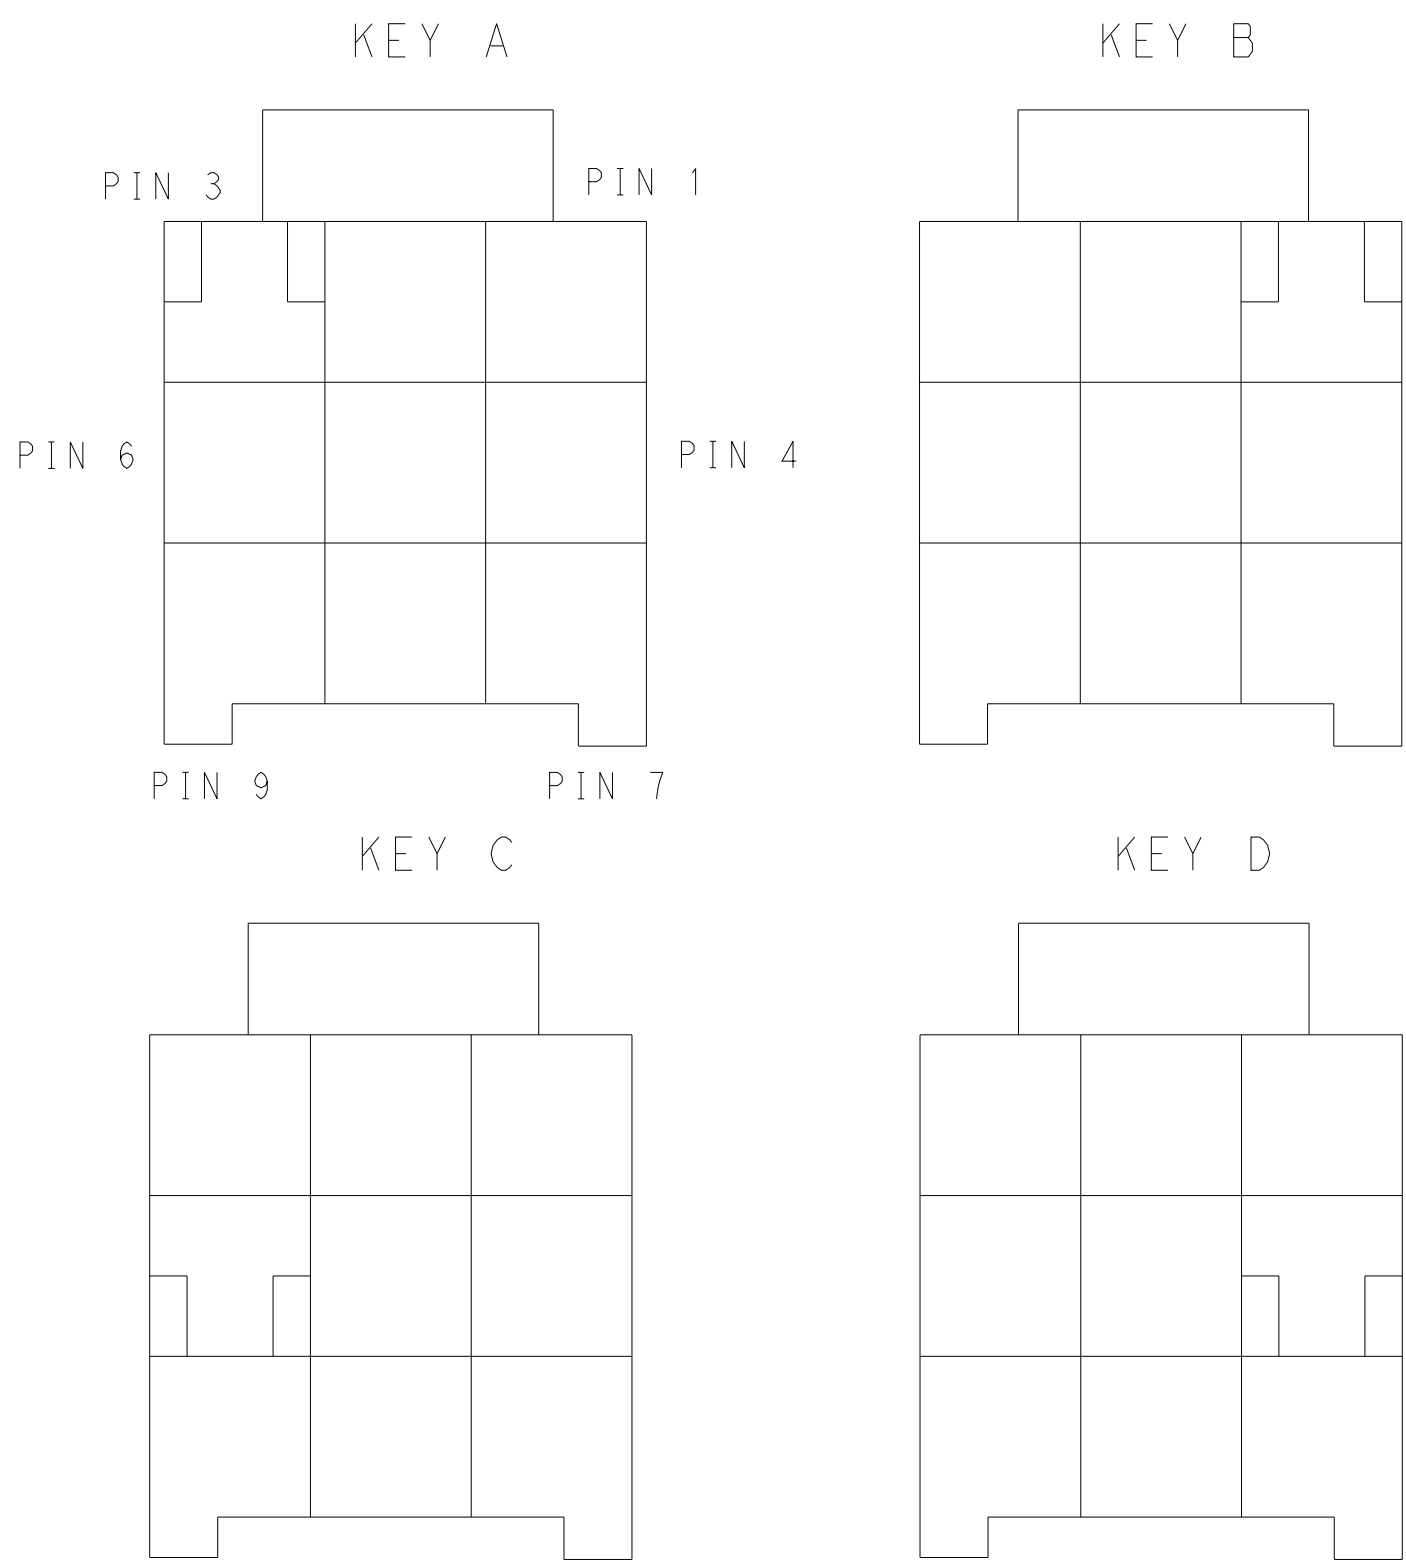

KEYING FOR 3*3 POS.

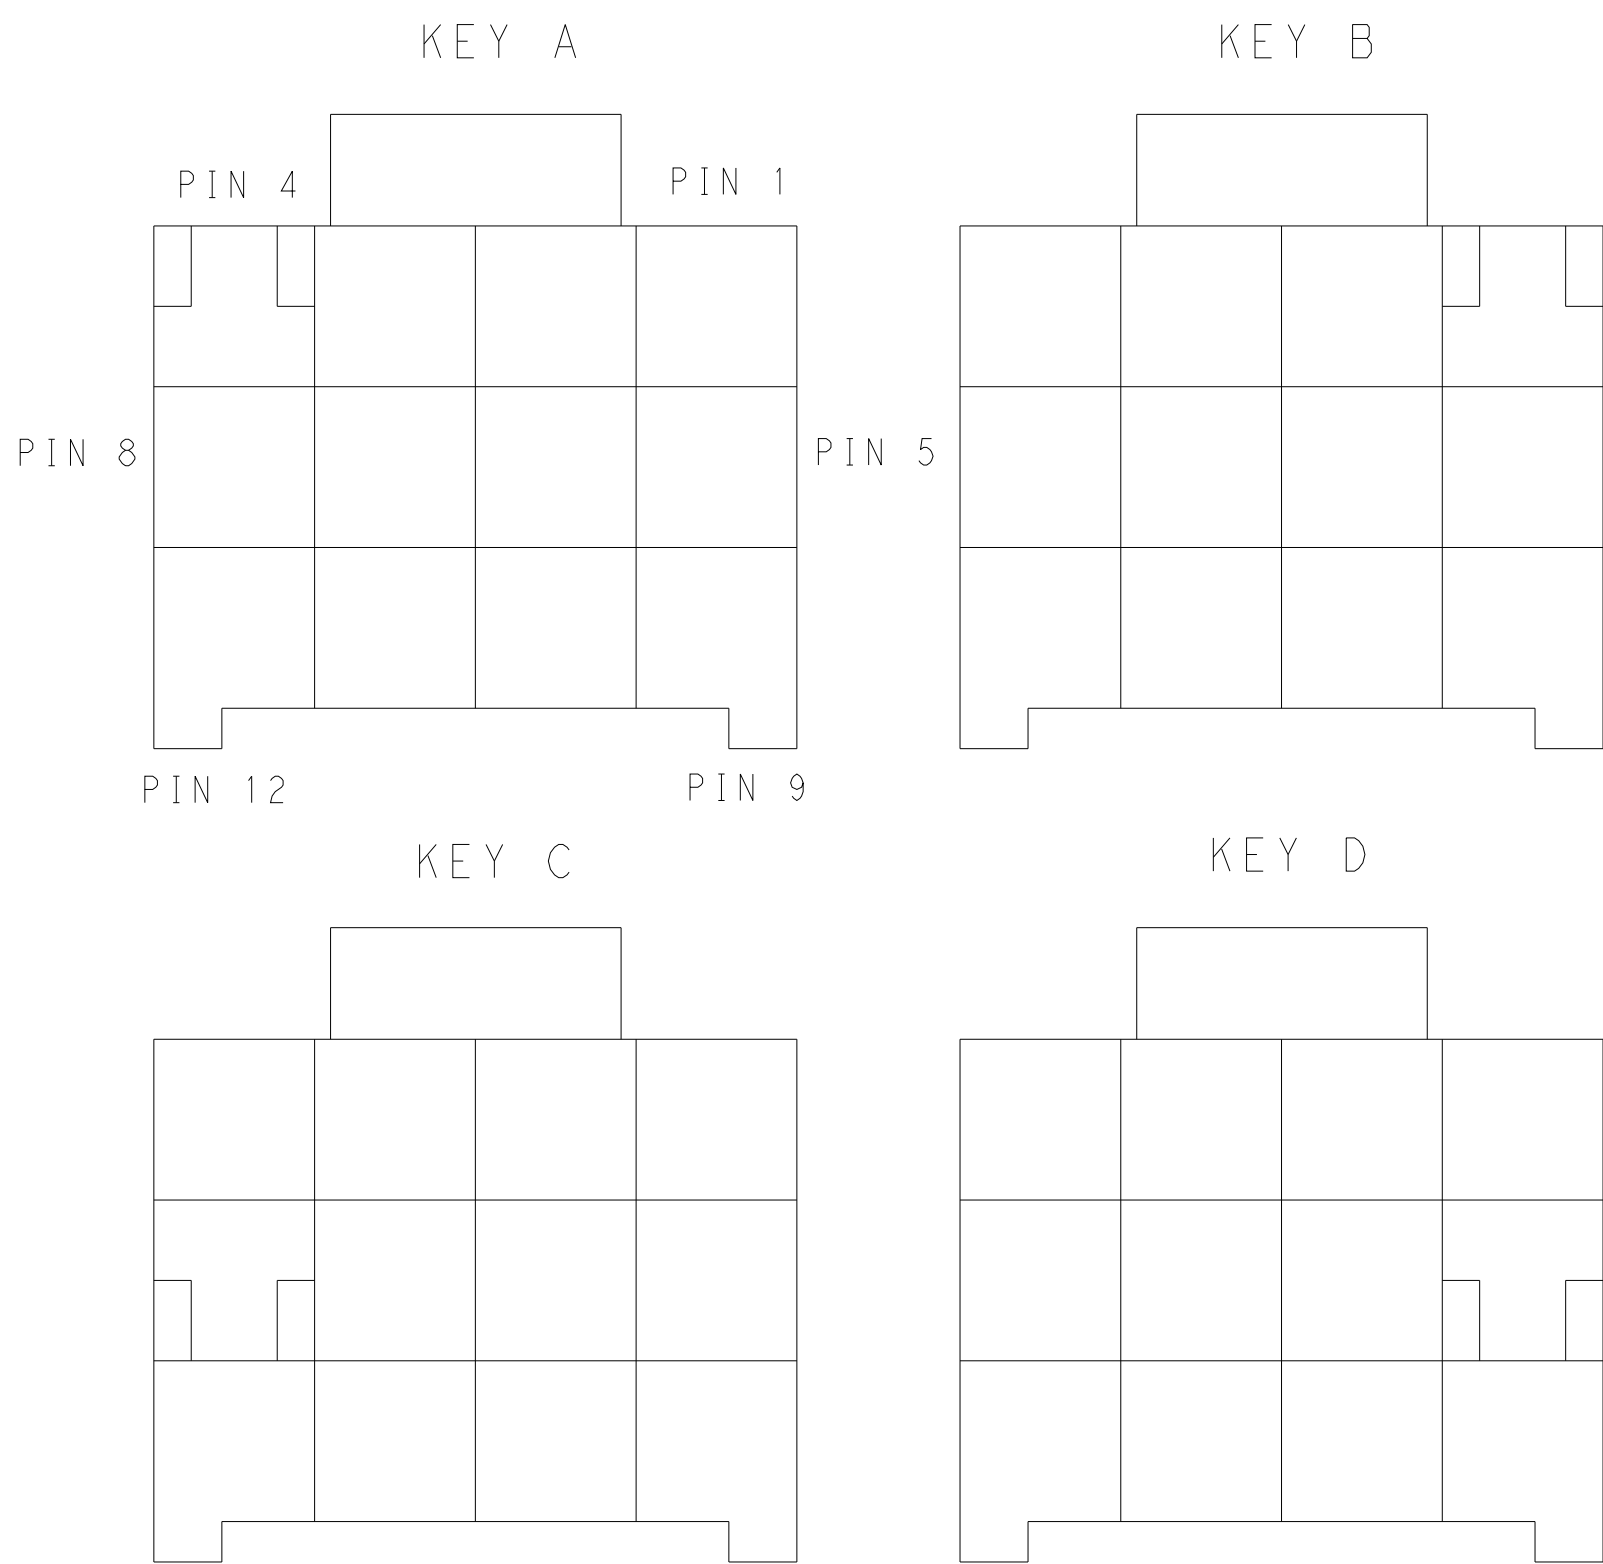

KEYING FOR 3*4 POS.

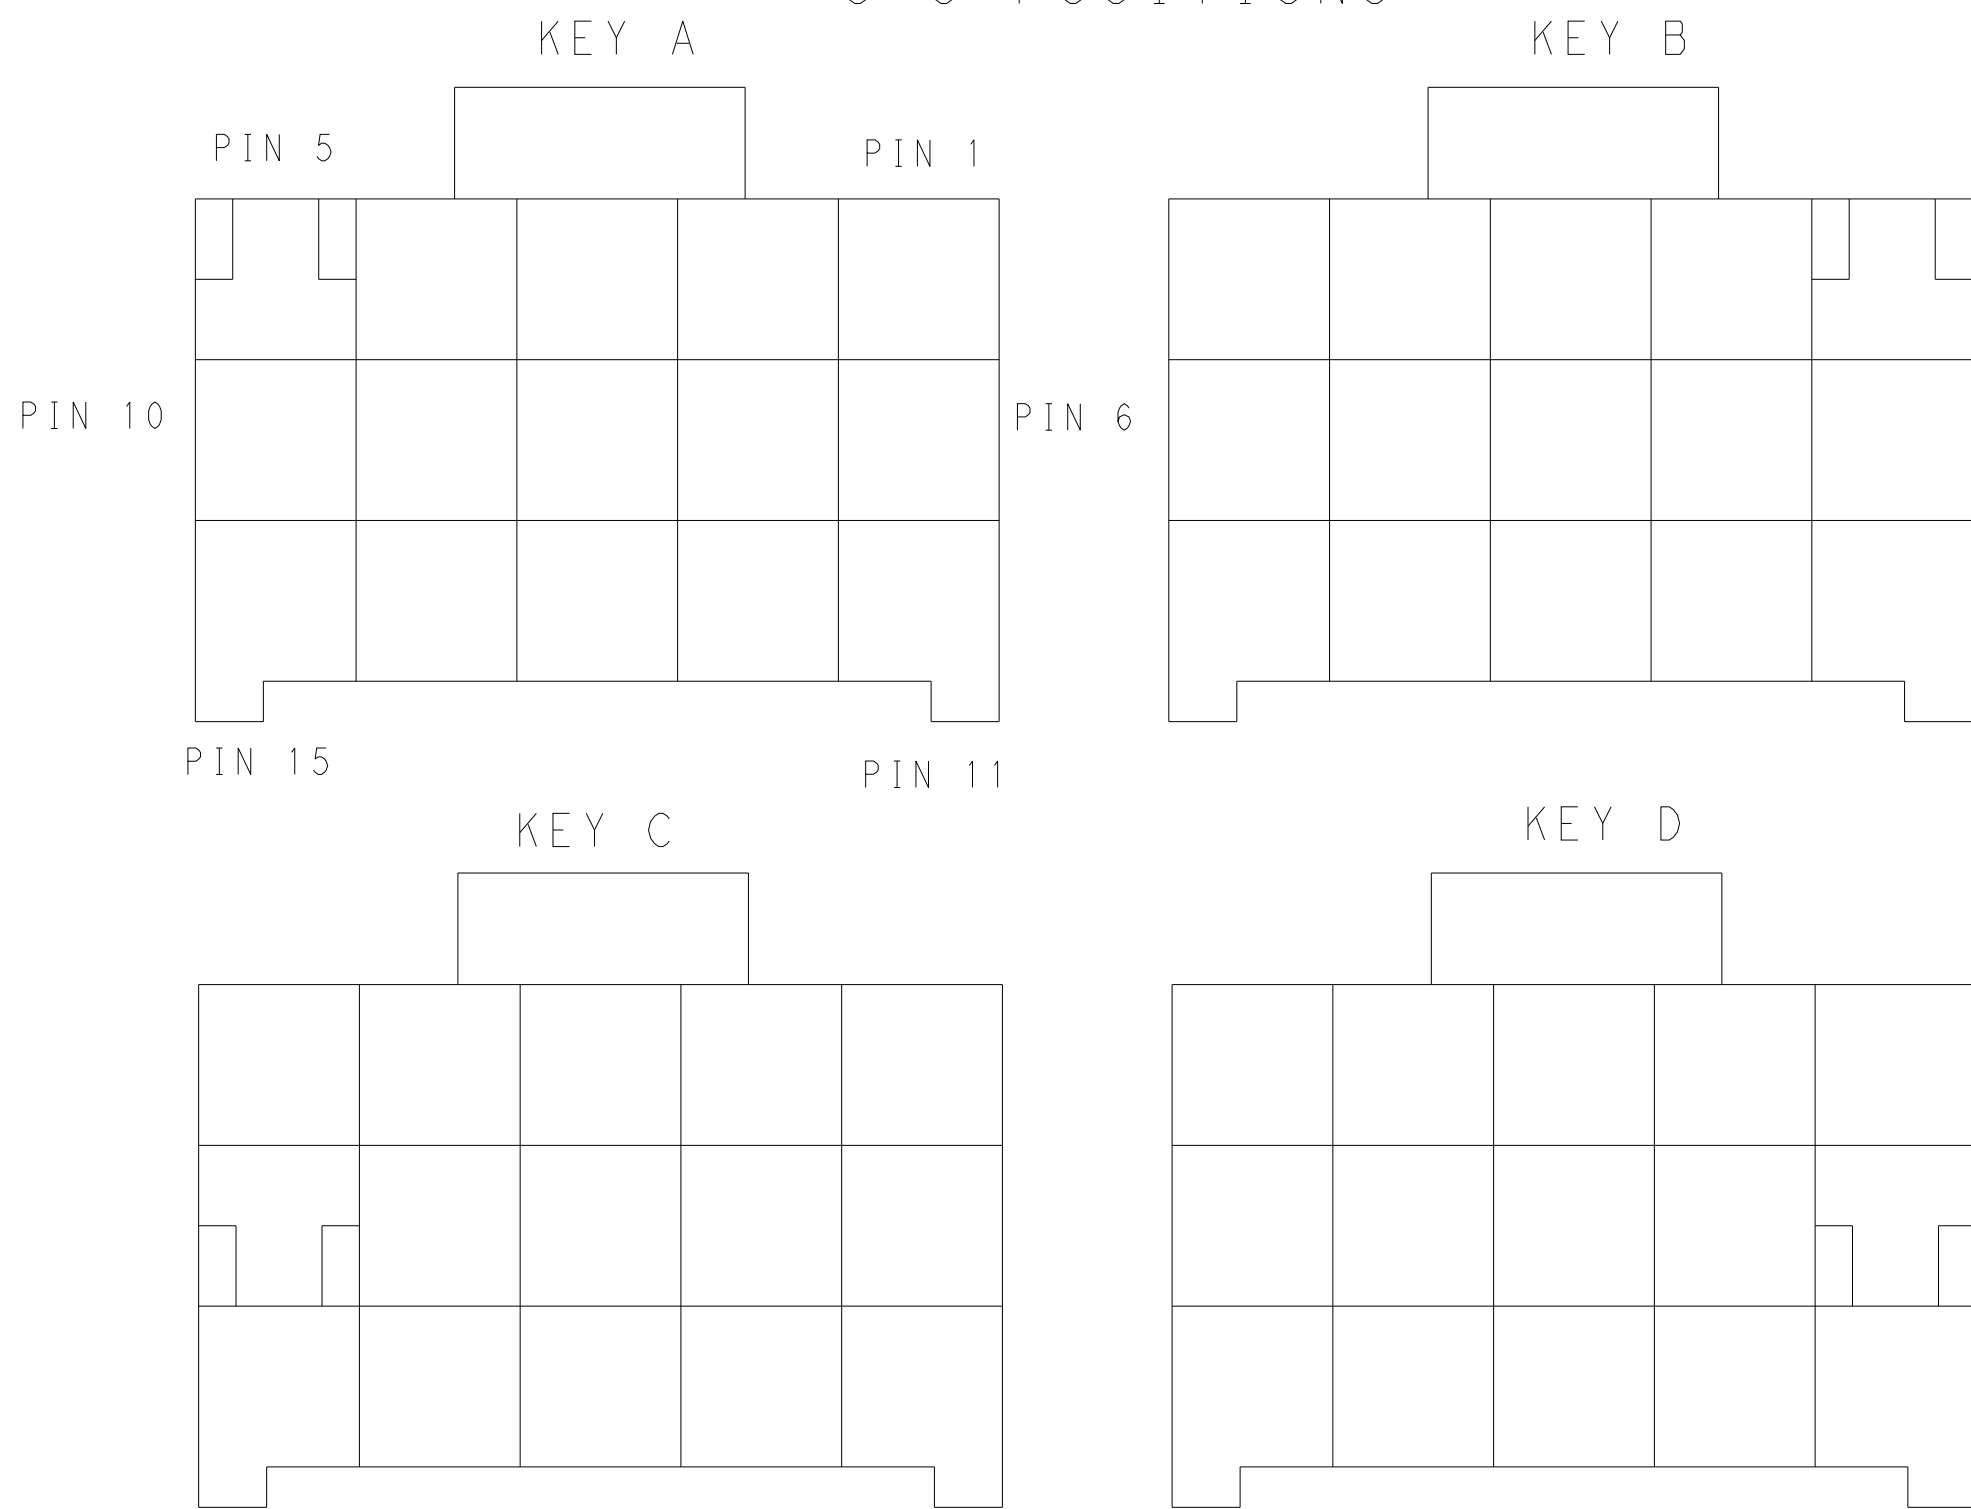

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	TOMMY_WU		09JUL2012		 TE Connectivity								
DIMENSIONS: mm				CHK	HAPYE_WU		09JUL2012										
				APVD	YUHONG_MAO		09JUL2012										
				TOLERANCES UNLESS OTHERWISE SPECIFIED:				NAME		PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK							
				0 PLC ±.0				APPLICATION SPEC									
				1 PLC ±0.35													
				2 PLC ±0.25													
				3 PLC ±.													
4 PLC ±.				ANGLES		FINISH		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
MATERIAL								WEIGHT		A1		100779		C=1971876		-	
-				-				-		Customer Drawing		SCALE		SHEET		2 OF 2	
-				-				-		-		-		-		REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-1971876-4](#)