

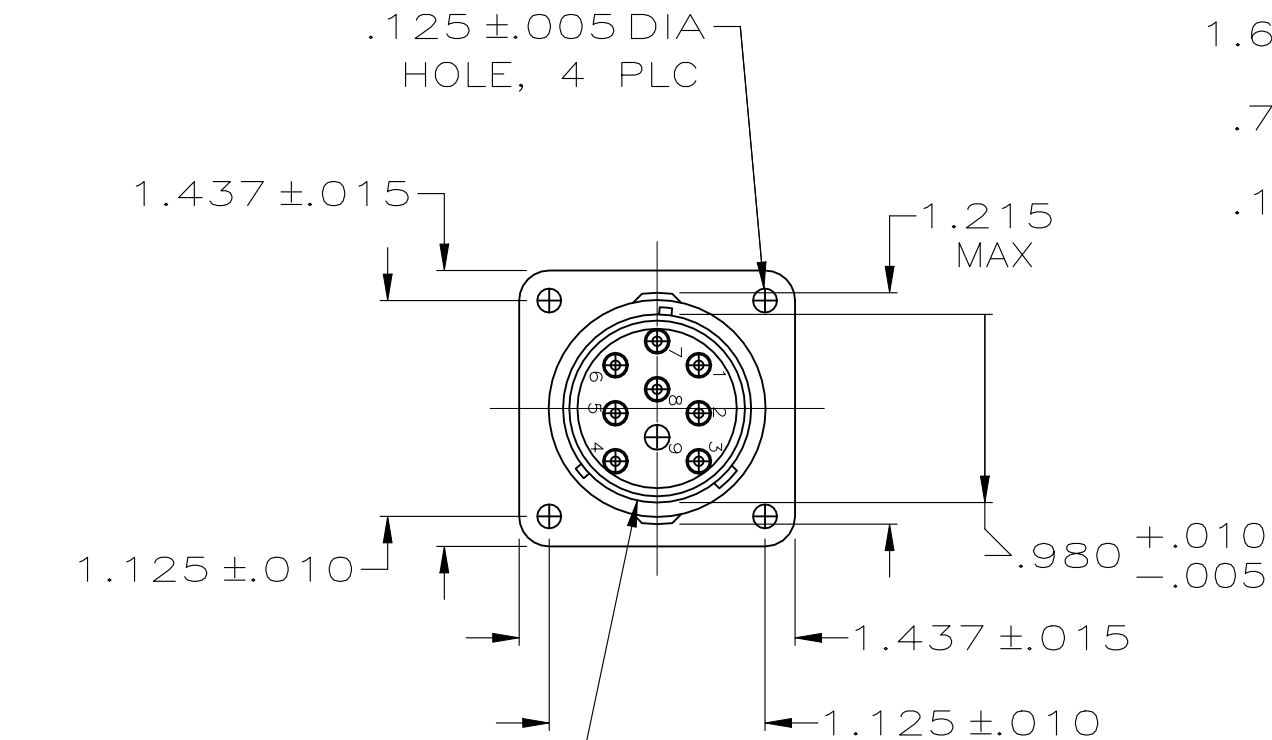
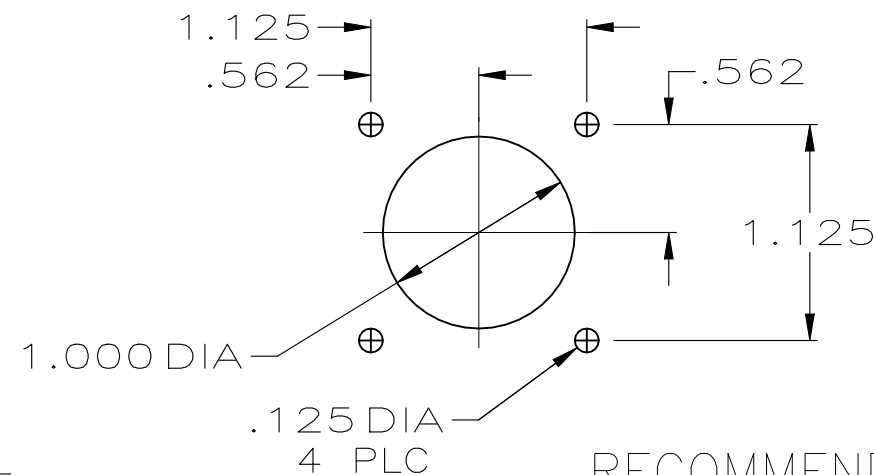


P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	PER PCN E-20-018081	10MAR2021	SCK	

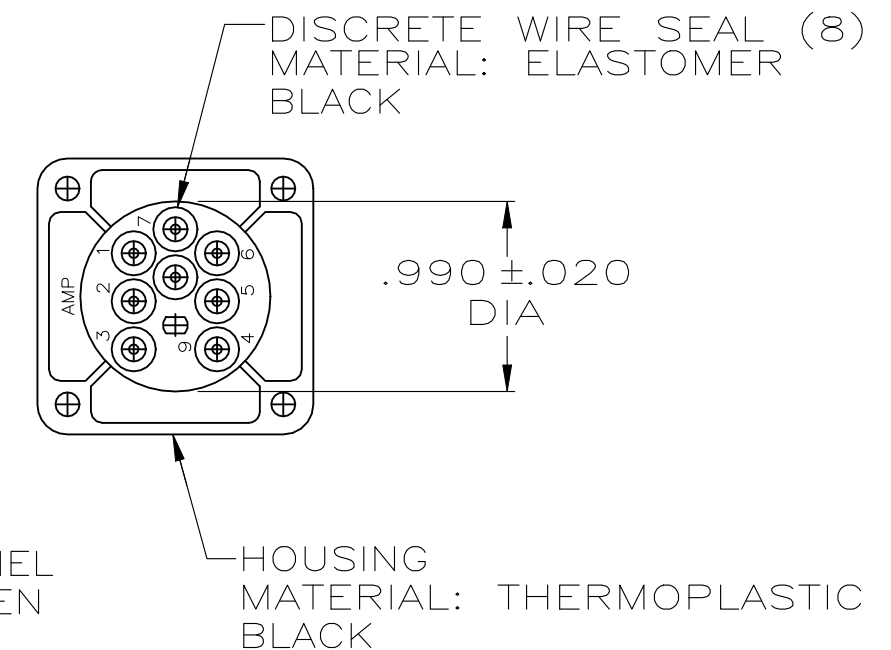

PERIPHERAL SEAL
MATERIAL: ELASTOMER
BLACK

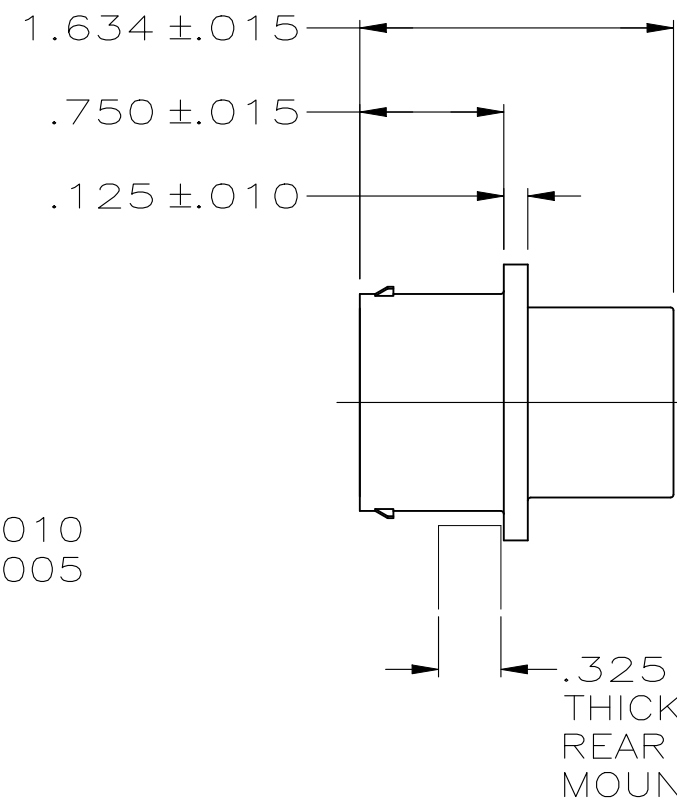

RECOMMENDED PANEL CUTOUT

1. WIRE INSULATION SEALING RANGE .070-.115 DIA.
2. MATES WITH 208678-1.
3. TOTAL LENGTH OF MATED CONNECTORS IS LESS THAN 2.50 INCHES.
4. THIN MEMBRANE PERMISSIBLE ON SMALL DIAMETER OF WIRE SEALS.
5. ROTATION OF CAVITY CIRCUIT KEY FROM PART TO PART IS PERMISSIBLE.

208677-1

PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± - FINISH -
MATERIAL SEE CALLOUT	

DWN J. GALLUCCI BG CHK J. McCLINTON	8-10-90 1-4-91
APVD —	1-18-91 K.BEAVER
PRODUCT SPEC —	1-29-91 J.FULPONI
APPLICATION SPEC —	
WEIGHT 0.000000	
CUSTOMER DRAWING	



TE Connectivity

NAME ECONOSEAL, SQUARE FLANGE RECEPTACLE, SHELL SIZE 17, 8 POSN, PIN CONTACTS			
SIZE A3	CAGE CODE 00779	DRAWING NO C-208677	RESTRICTED TO —
SCALE 1:1		SHEET 1 OF 1	REV H

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[208677-1](#)