
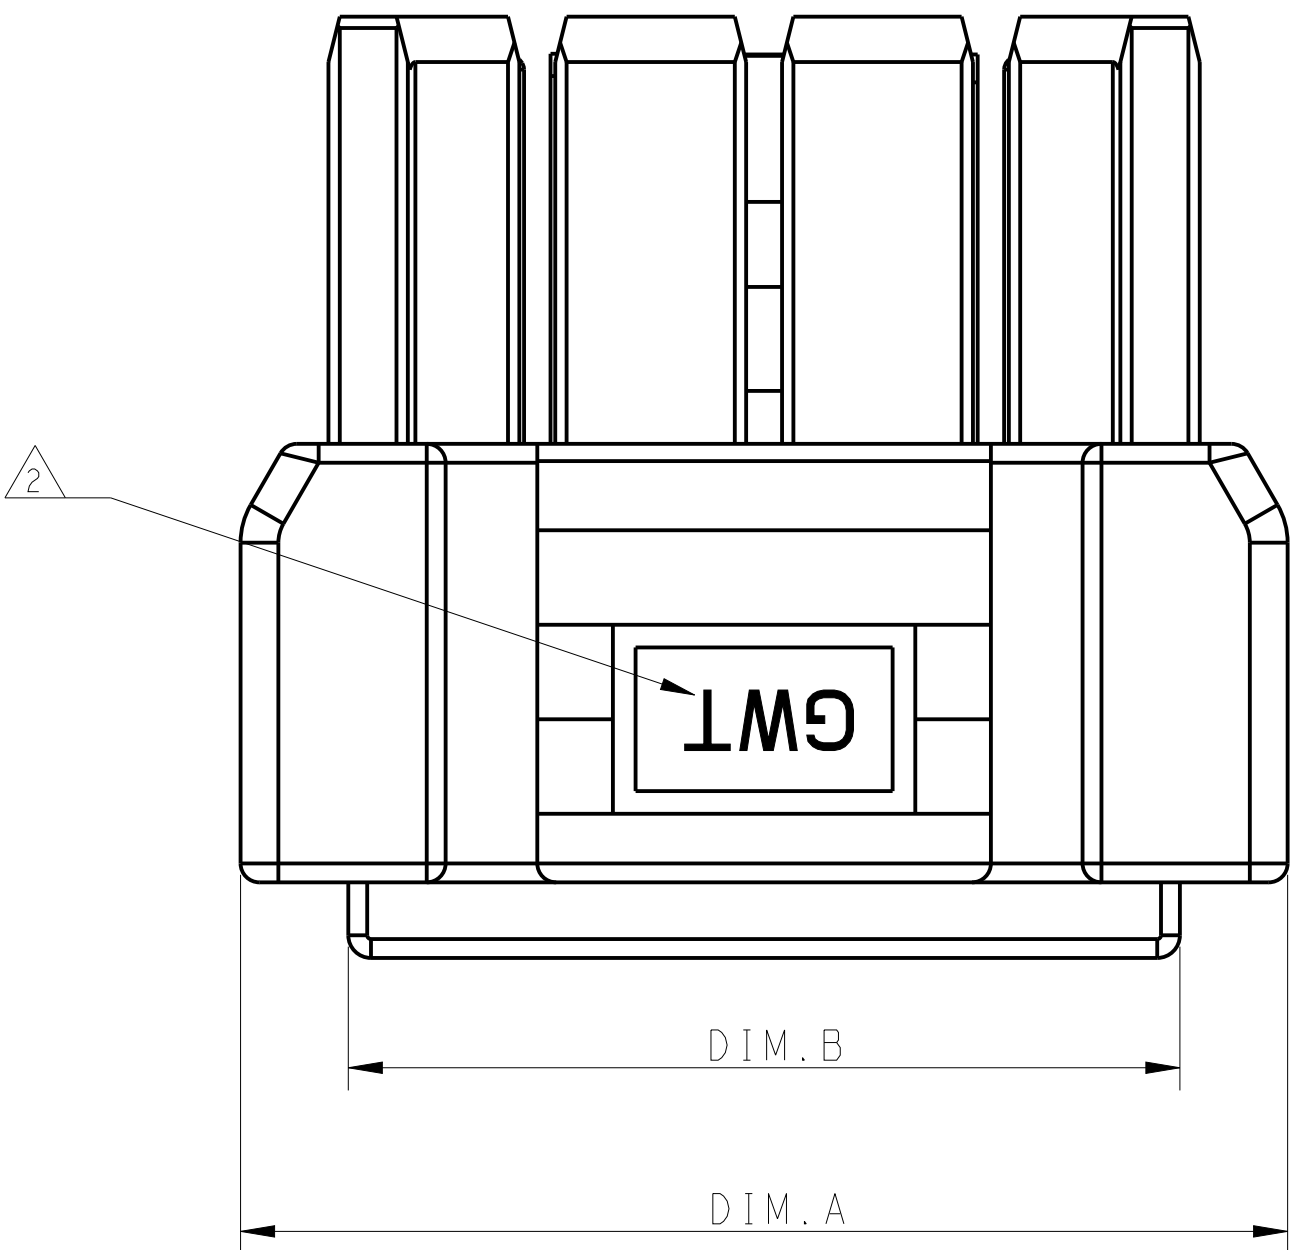
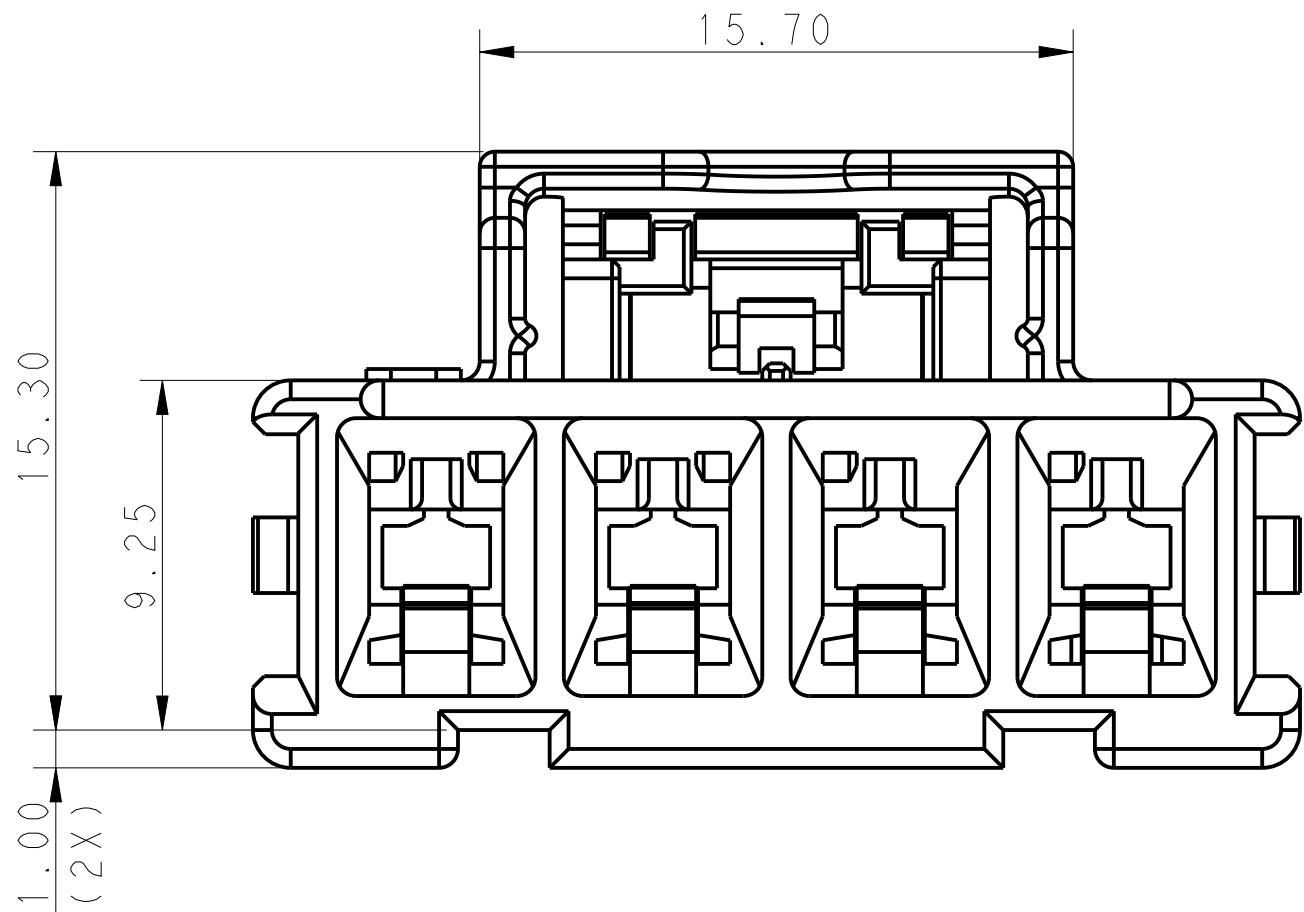
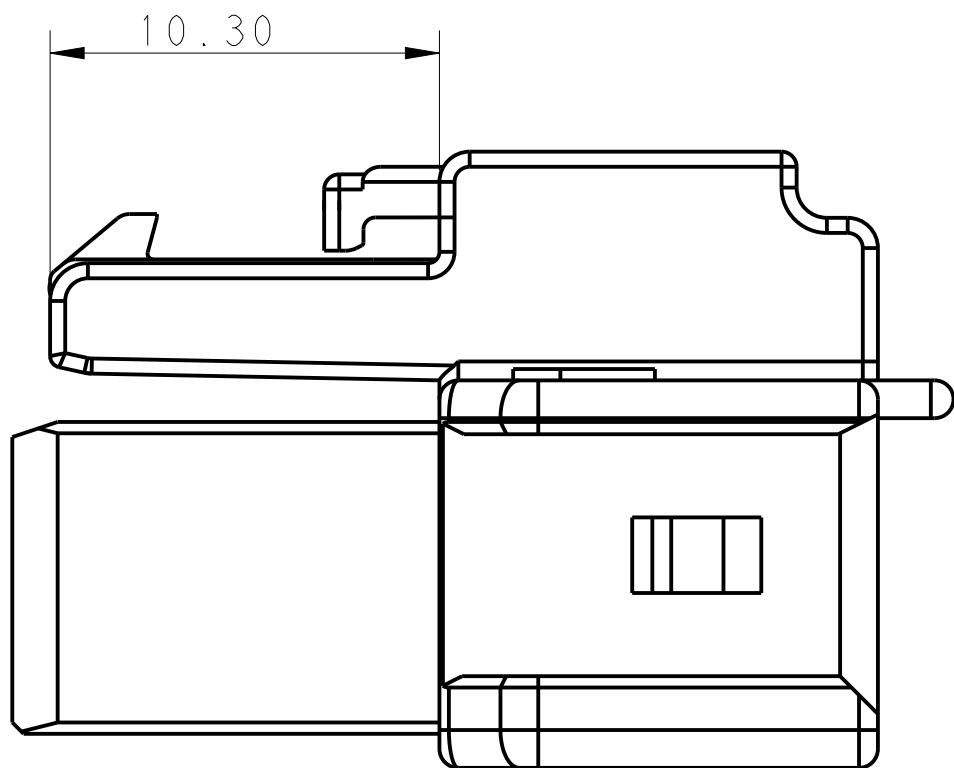
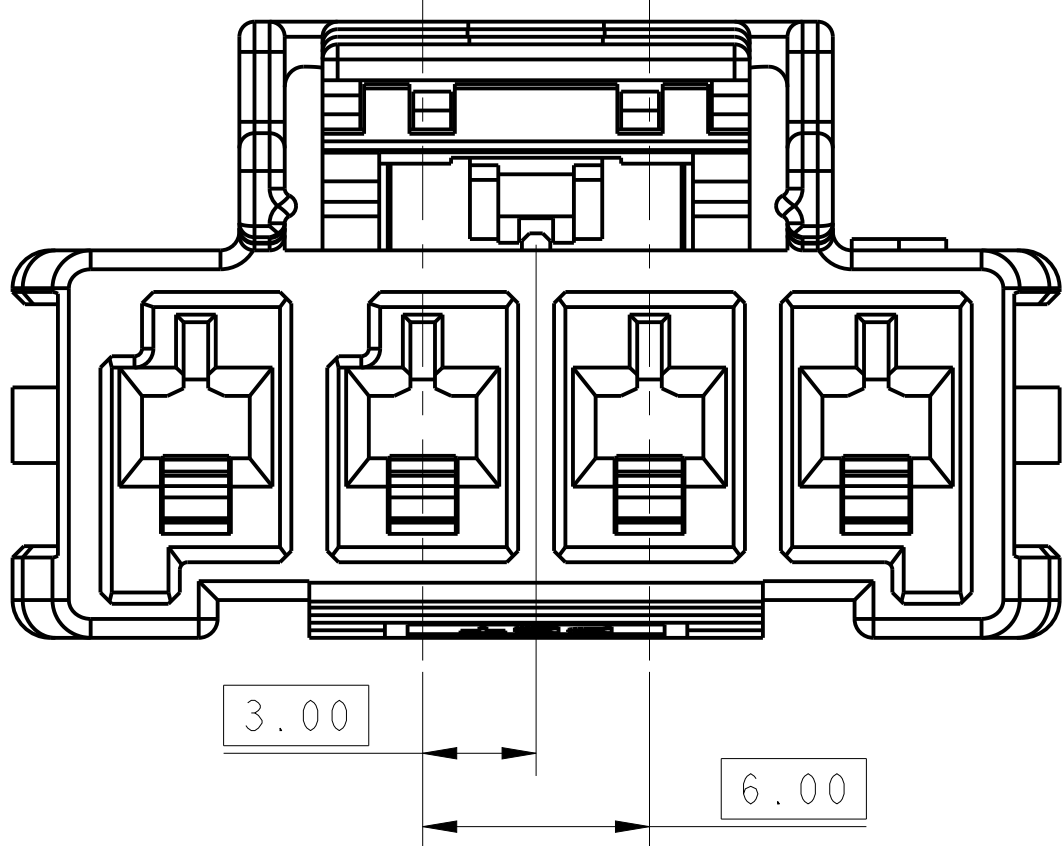


LOC		DIST		REVISIONS						
-		-								
		P	LTR	DESCRIPTION			DATE	DWN	APVD	
			D	REVISED PER ECR-21-100678			08APR2021	SS	VS	

POS.	DIM.A	DIM.B
1*5	33.70	28.00
1*4	27.70	22.00
1*3	21.70	16.00
1*2	15.70	10.00

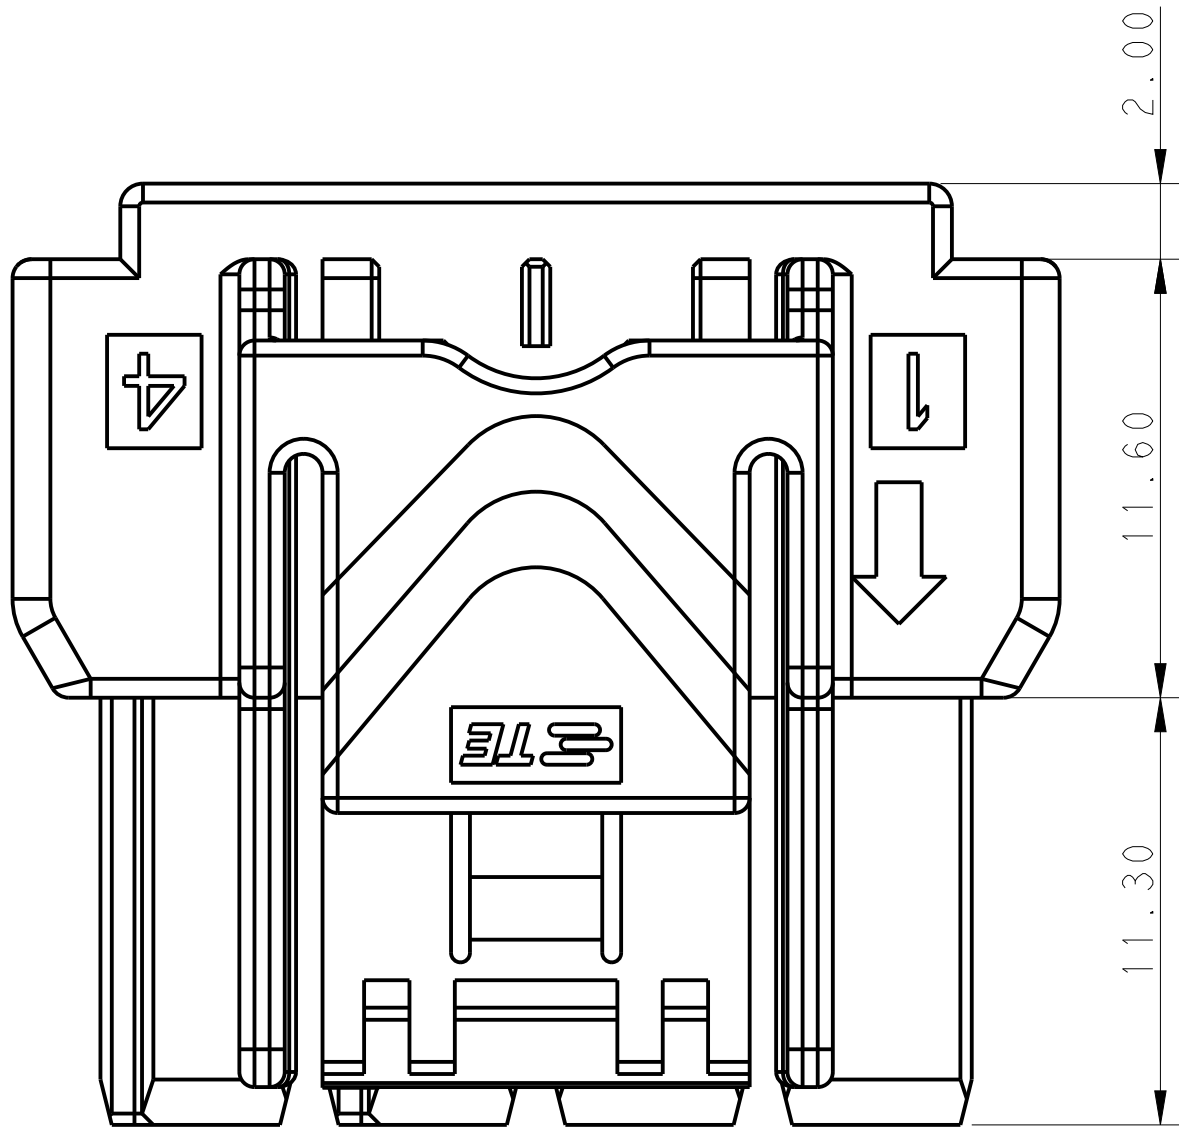

NOTE
1. MATERIAL:
LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0









△ MATERIAL MARK:
LEVEL A: GWT, LEVEL B: HWT

3. APPLICABLE CONTACT P/N
REC CONTACT: 1971237/1971779/81/83/85/87-*

4. MATING CONN. P/N
CAP HSG: *-2232358/263-
TPA: *-1971777-*

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	TOMMY_WU	26MAR2013	 TE Connectivity			
			CHK	HAPYE_WU	26MAR2013				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	YUZHONG_MAO	26MAR2013	NAME	PLUG HOUSING, SINGLE ROW POWER TRIPLE LOCK	
mm				PRODUCT SPEC					
		0 PLC	±-	108-106118					
		1 PLC	±0.35	APPLICATION SPEC					
		2 PLC	±0.25	114-106118					
		3 PLC	±-	WEIGHT					
		4 PLC	±-						
ANGLES		±-							
MATERIAL		FINISH					SIZE		CAGE CODE
SEE TABLE							DRAWING NO		RESTRICTED TO
							A100779		
				Customer Drawing			SCALE		
							SHEET		
							1 OF		
							REV		D

LOC		DIST		REVISIONS				
-		-		DESCRIPTION		DATE	DWN	APVD
		P	LTR					
			-	SEE SHEET 1		-	-	-

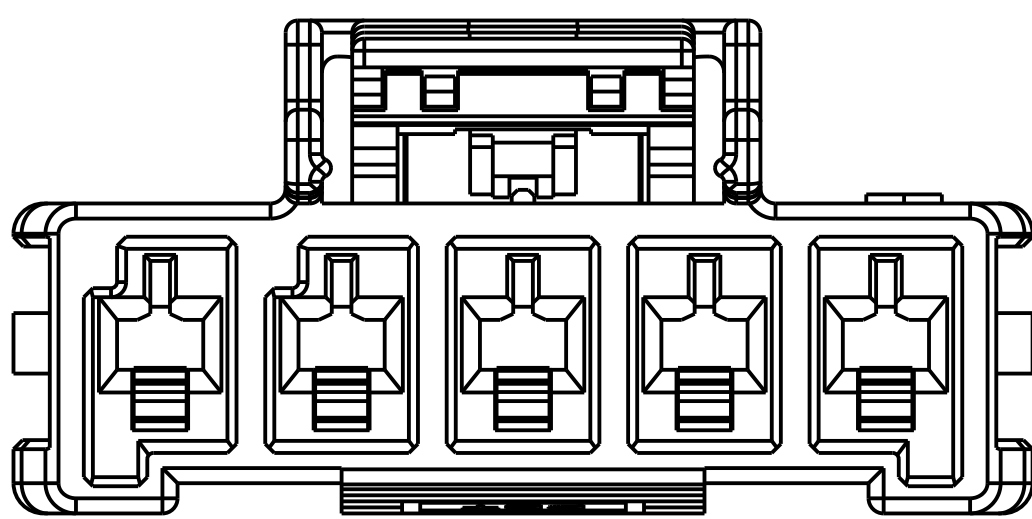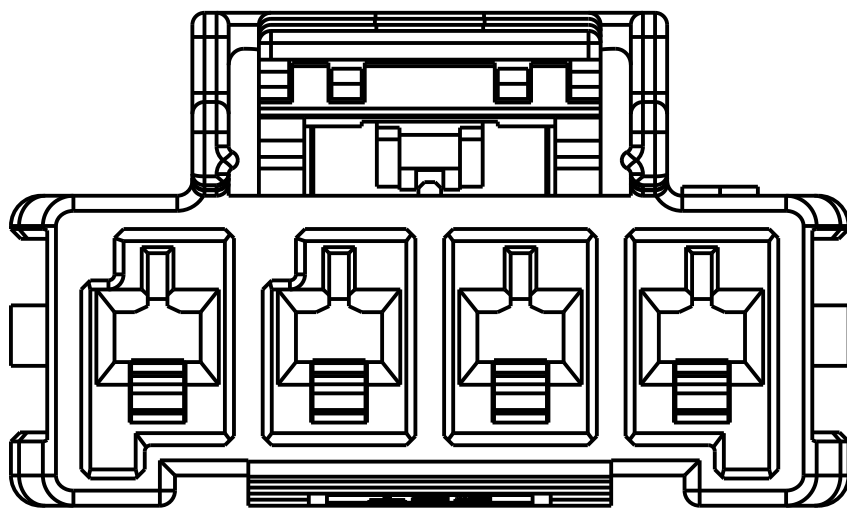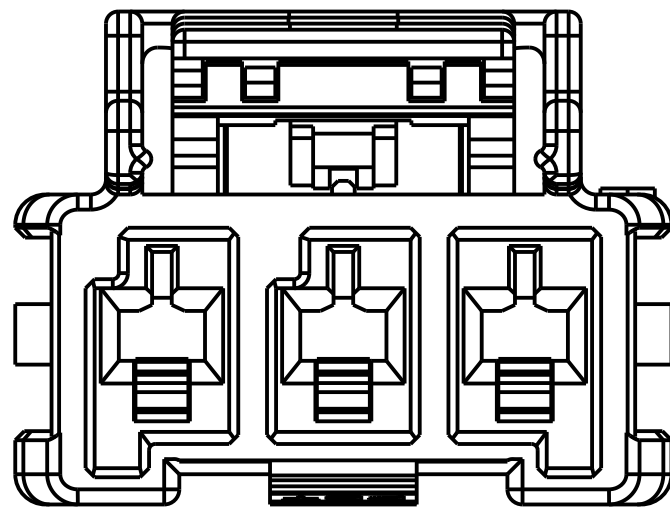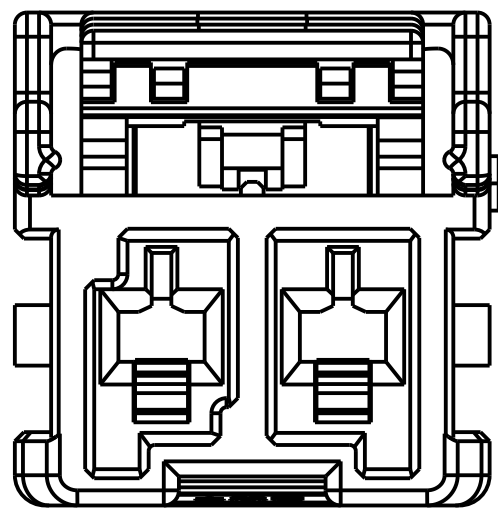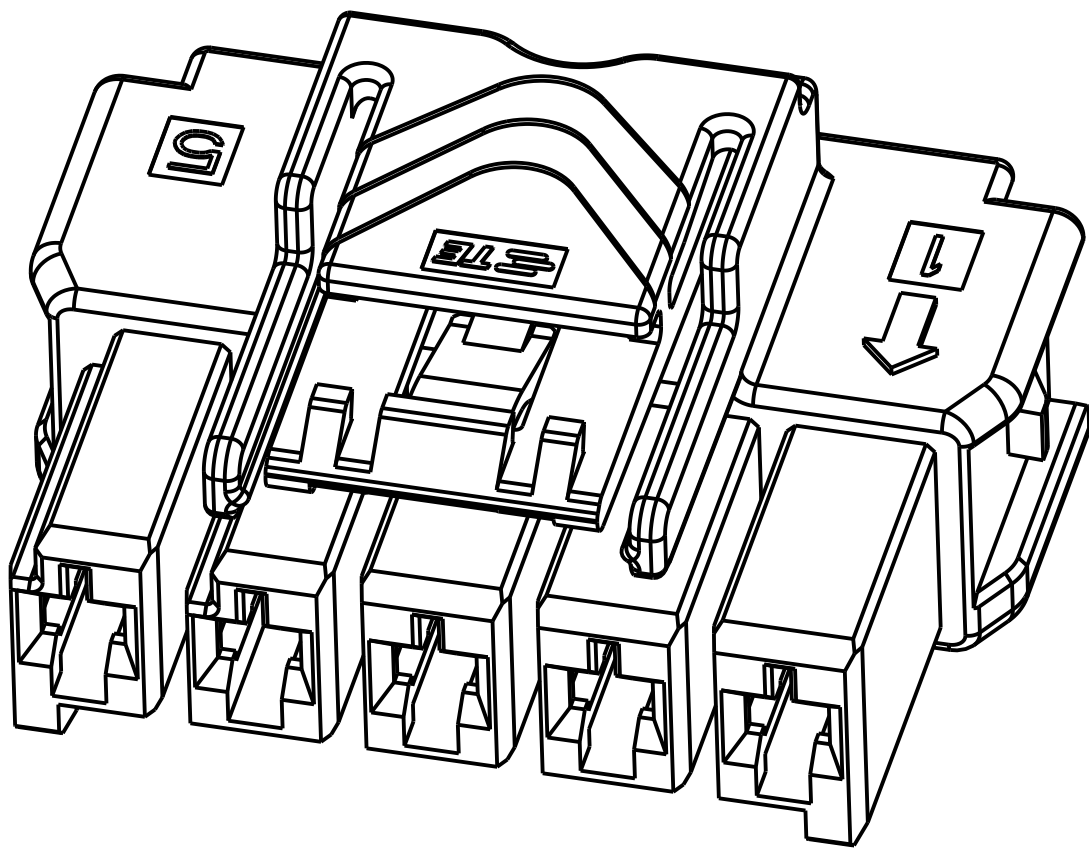
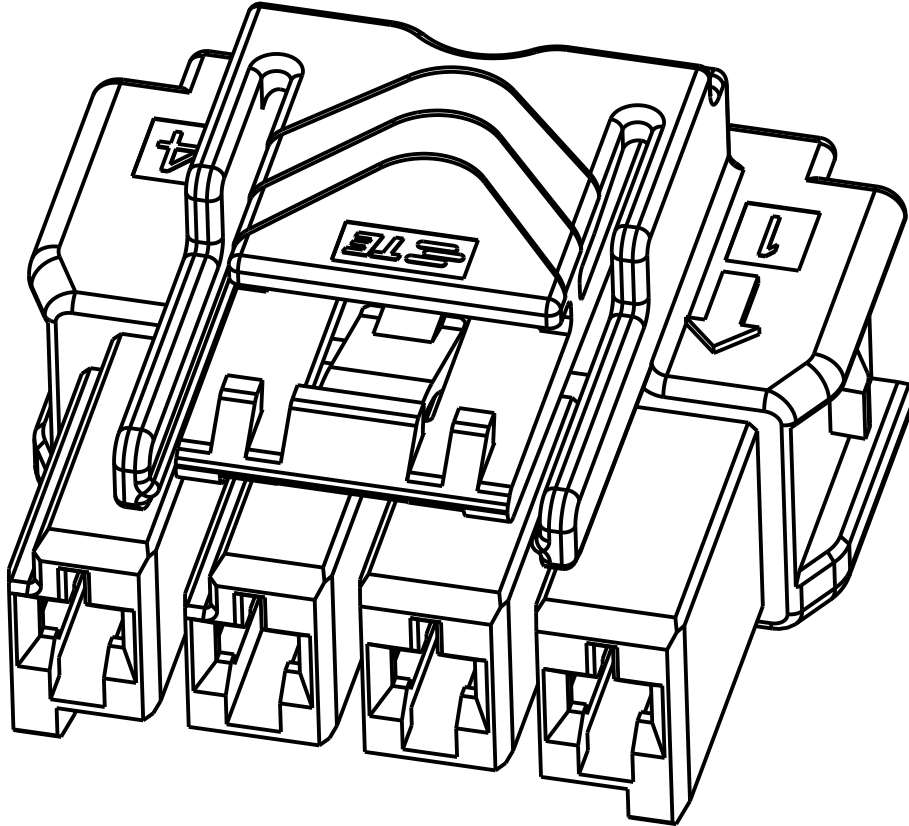
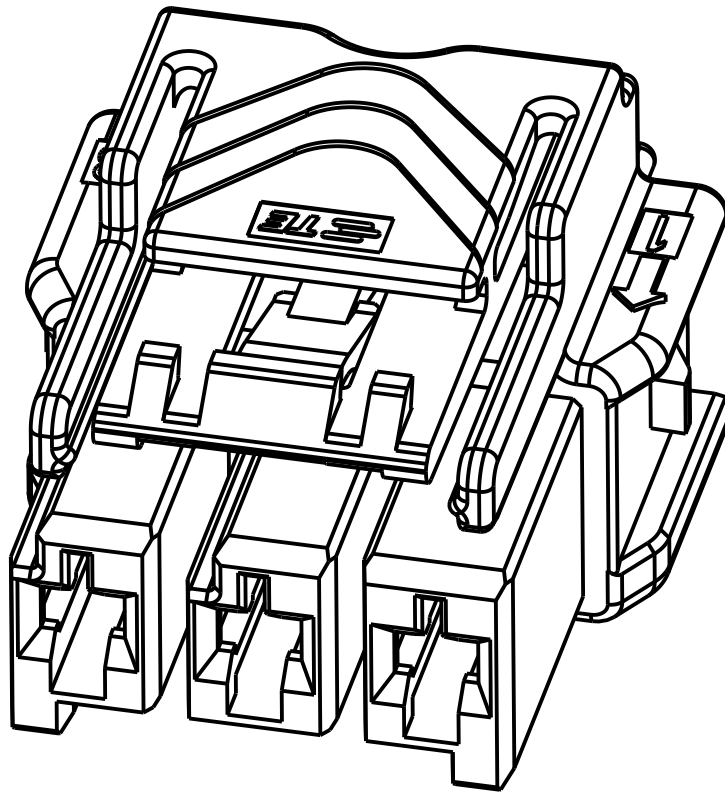
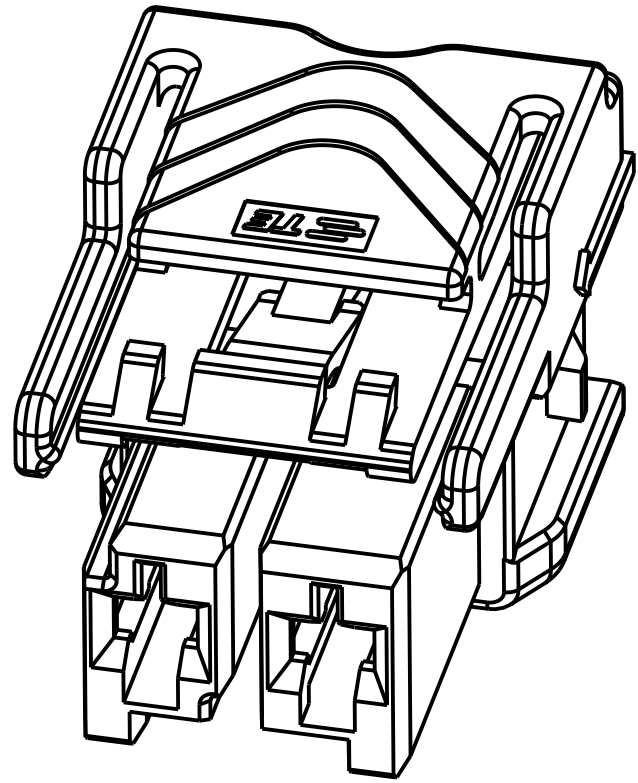


1*2 POSITIONS

1*3 POSITIONS

1*4 POSITIONS

1*5 POSITIONS

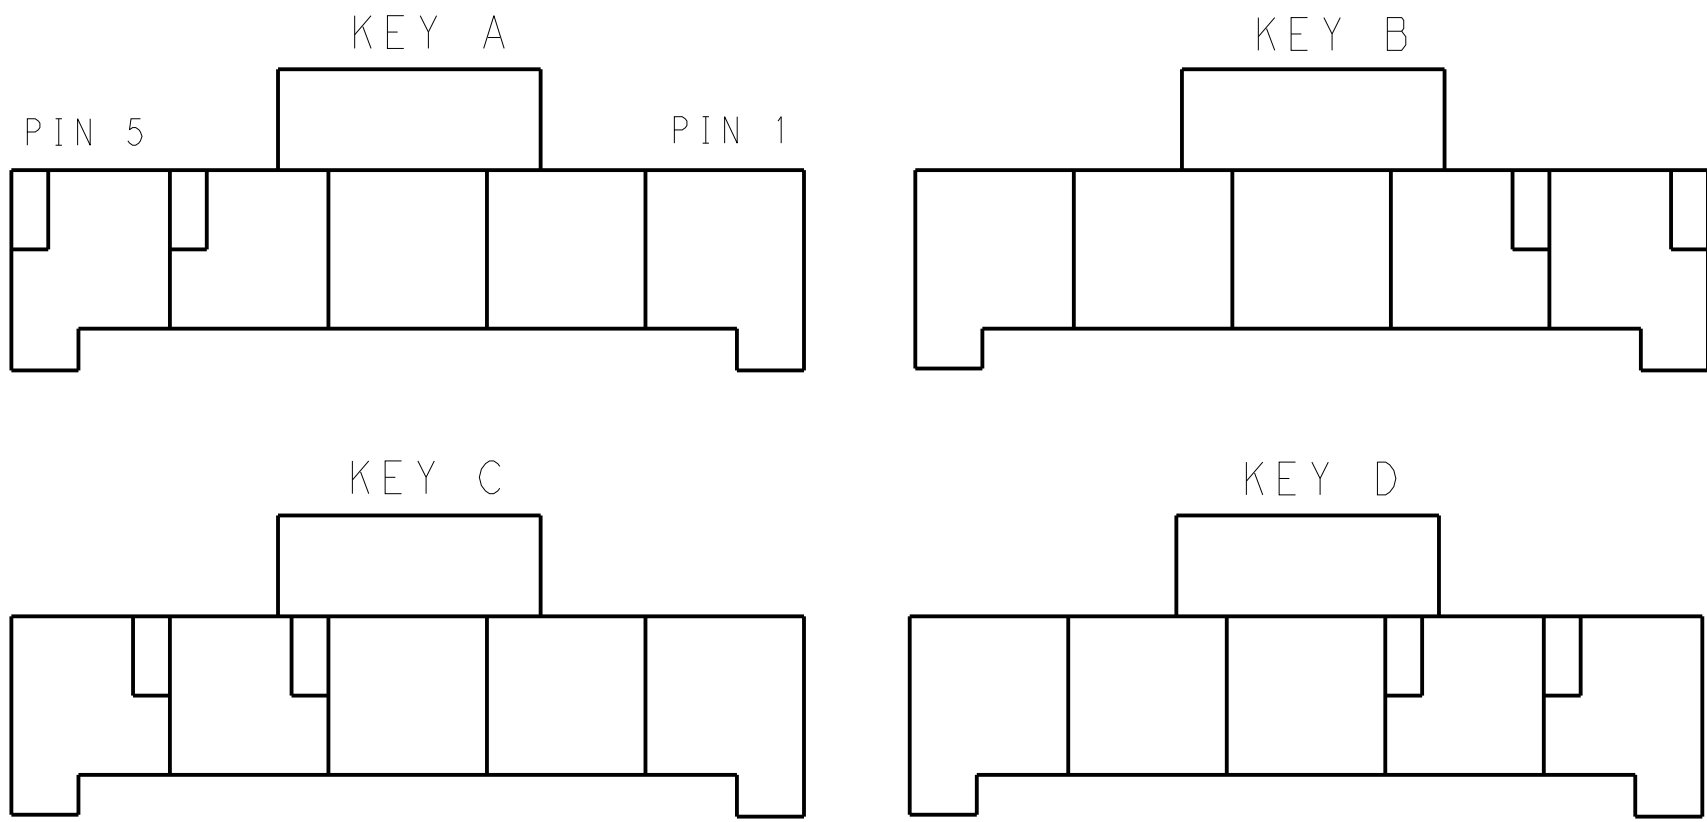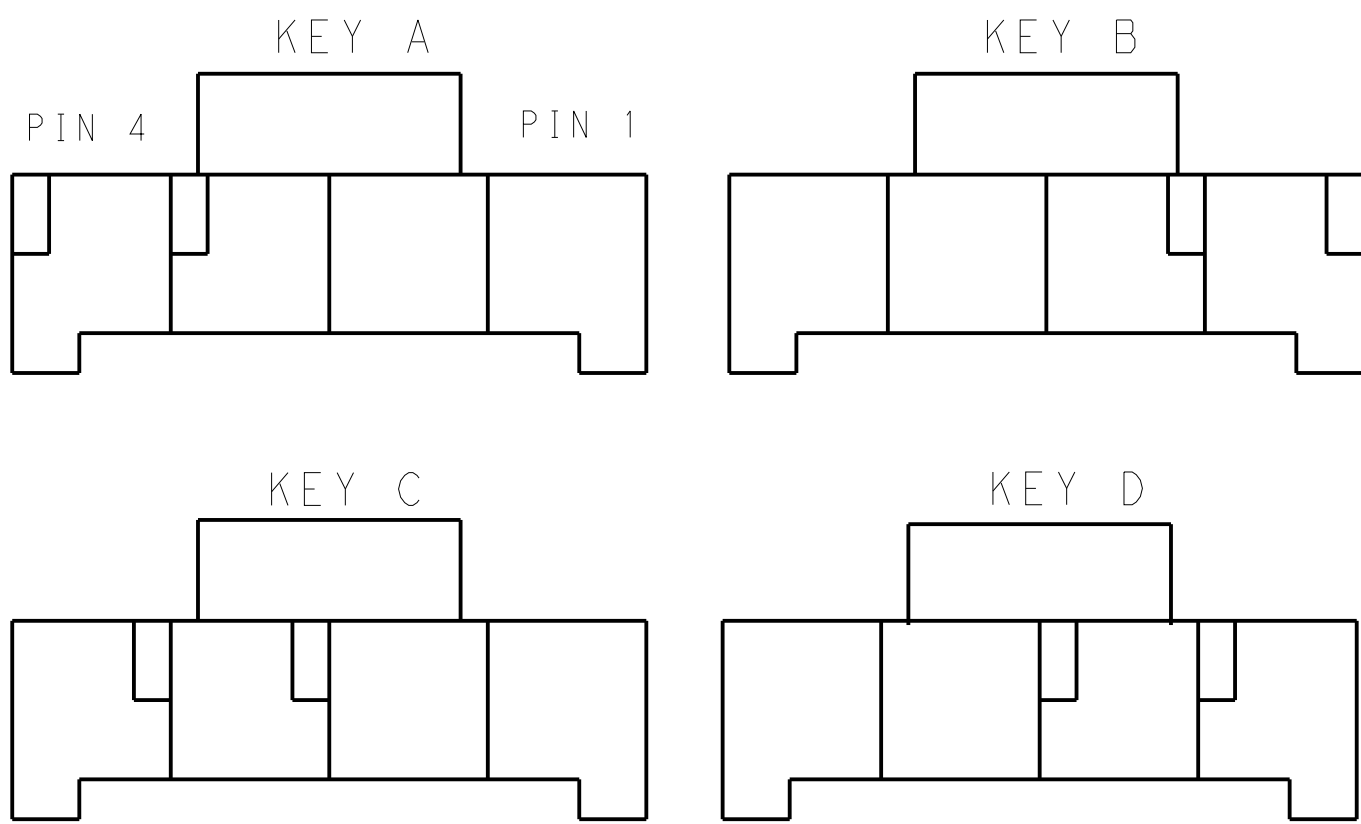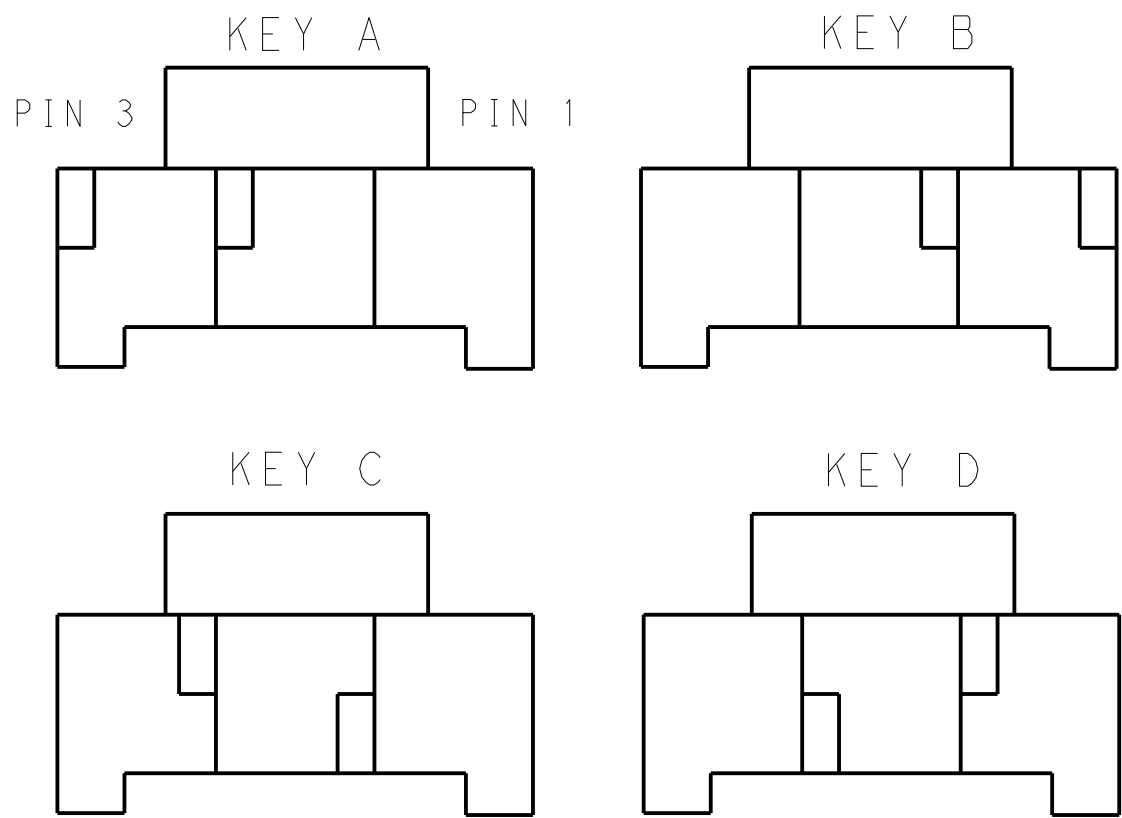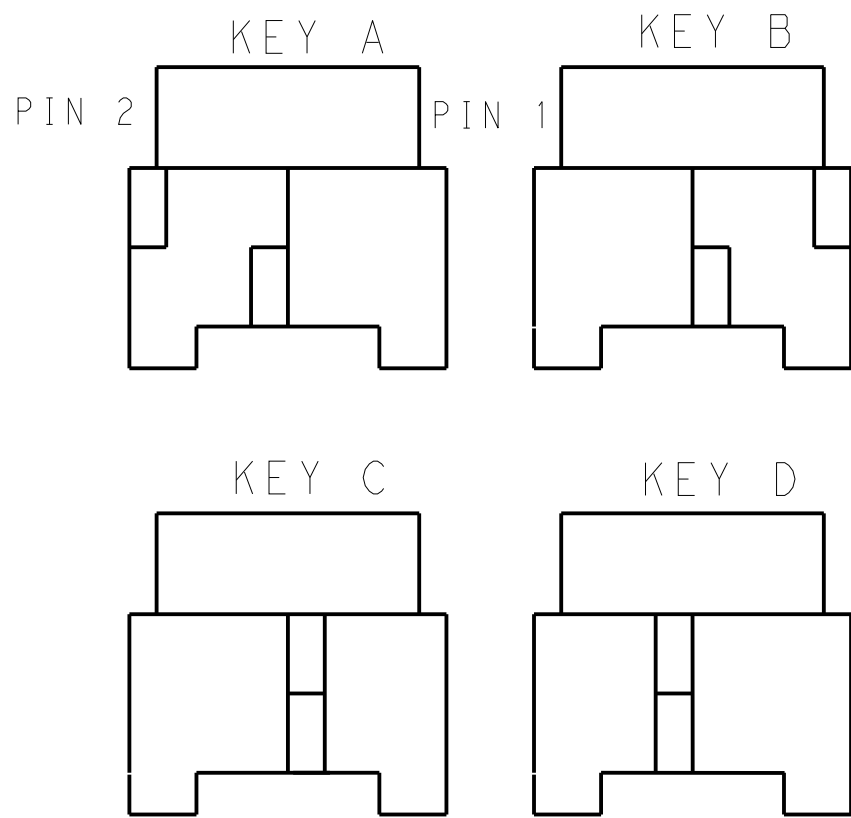

KEYING FOR 1*2 POS.

KEYING FOR 1*3 POS.

KEYING FOR 1*4 POS.

KEYING FOR 1*5 POS.

1*5	LEVEL A	DARK GREY	KEY A	5-2232265-7
		BROWN	KEY B	6-2232265-7
		GREEN	KEY C	7-2232265-7
		ORANGE	KEY D	8-2232265-7
1*4	LEVEL A	BLACK	KEY A	1-2232265-3
		DARK GREY	KEY A	5-2232265-4
		BROWN	KEY B	6-2232265-4
		GREEN	KEY C	7-2232265-4
1*3	LEVEL A	ORANGE	KEY D	8-2232265-4
		BLACK	KEY A	1-2232265-2
		DARK GREY	KEY A	5-2232265-3
		BROWN	KEY B	6-2232265-3
1*2	LEVEL A	GREEN	KEY C	7-2232265-3
		ORANGE	KEY D	8-2232265-3
	LEVEL B	DARK GREY	KEY A	5-2232265-2
		BROWN	KEY B	6-2232265-2
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN: TOMMY.WU 26MAR2013
CHK: HAPYE.WU 26MAR2013
APVD: YUJHONG.MAO 26MAR2013

DIMENSIONS:
mm

0 PLC ±0.35
1 PLC ±0.25
2 PLC ±0.25
3 PLC ±0.25
4 PLC ±0.25
ANGLES ±0.5°
FINISH -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -

Customer Drawing

SCALE - SHEET 2 OF 2 REV D

TE Connectivity

NAME: PLUG HOUSING, SINGLE ROW
POWER TRIPLE LOCK

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 2232265

RESTRICTED TO: -

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-2232265-4](#)