

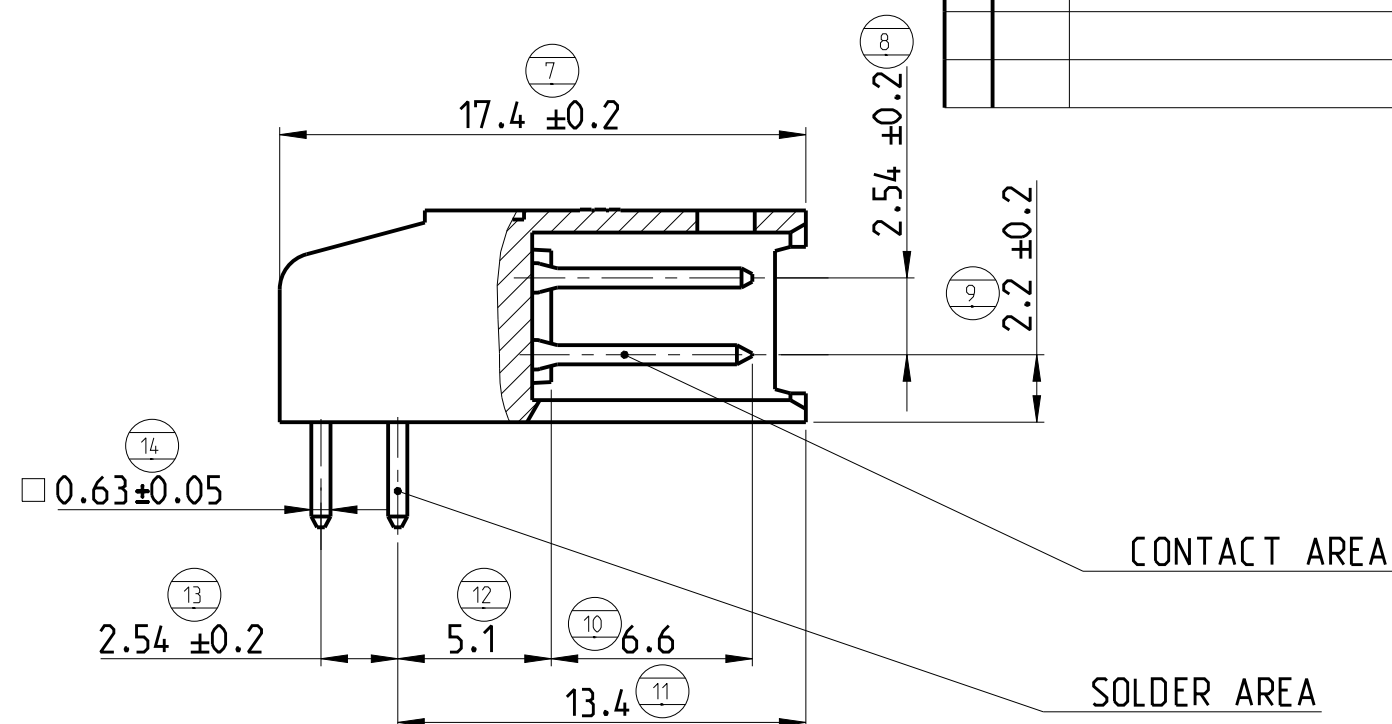
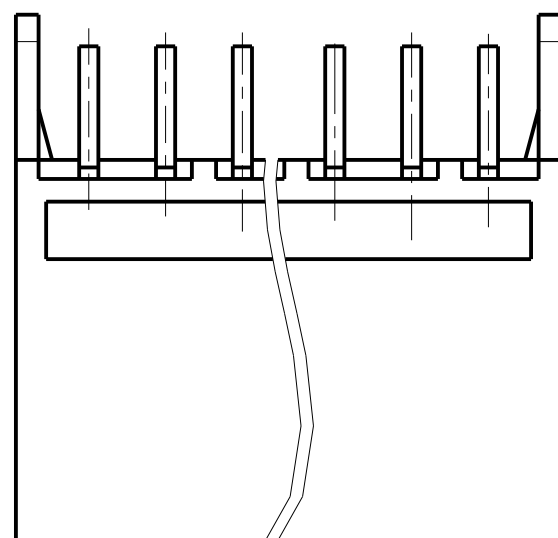


P	LTR	DESCRIPTION	DATE	DWN	APVD
	AD	REDRAWN. PLASTIC SUPPLIER CHANGED	11MAY2021	SB	KJK

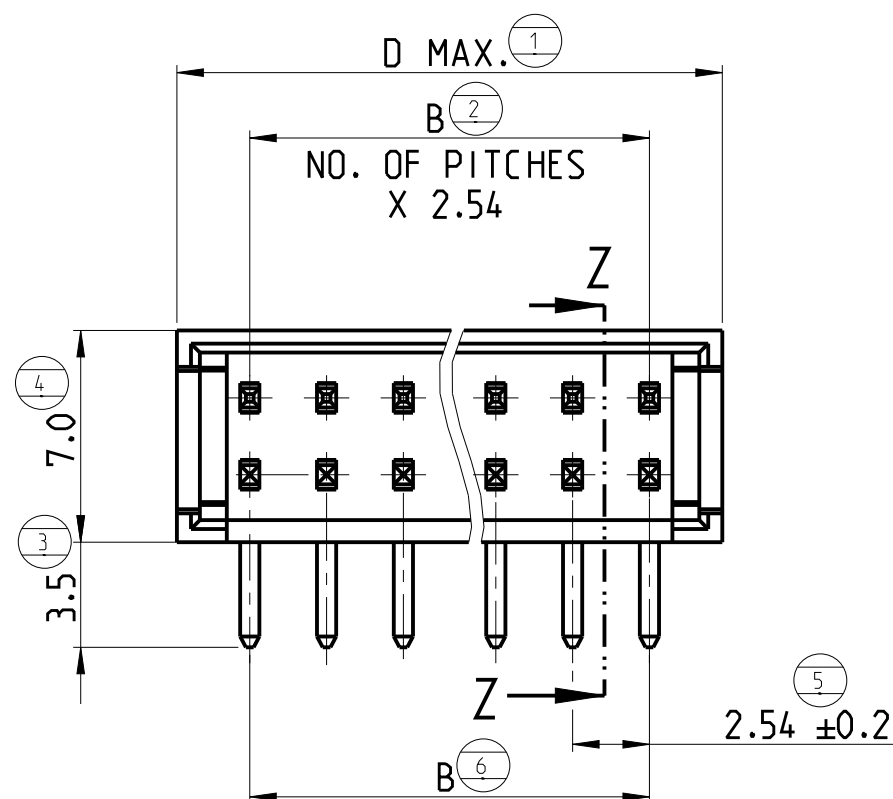

PARTIAL SEC. Z-Z

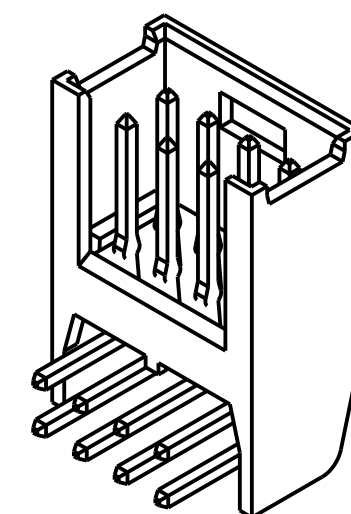

3:1

NOTES:

- △ FINISH: 3-5 μm TIN OVER MIN 1.27 μm NICKEL
- △ FINISH: DUPLEX PLATED MIN. 0.38 μm GOLD
IN CONTACT AREA AND 2.5 μm TIN IN SOLDER AREA. OVER MIN 1.27 μm NICKEL.
- △ FINISH: DUPLEX PLATED MIN 0.76 μm GOLD
IN CONTACT AREA AND 2.5 μm TIN IN SOLDER AREA. OVER MIN 1.27 μm NICKEL.
- △ MATERIALS:
-HOUSINGS: FLAME RETARDANT THERMOPLASTIC UL94V0. COLOR BLACK.
-TIN AND GOLD PLATED CONTACTS: BRASS

△ OBSOLETE

15.2	10.16	280393-3	284124-1	280393-1	5
58.5	53.34	281021-3	280393-2	280393-1	22
48.3	43.18	280392-3	281021-2	280392-1	18
40.7	35.56	280522-3	280392-2	280392-1	15
33.1	27.94	280510-3	280522-2	280522-1	12
25.4	20.32	280390-3	280510-2	280510-1	9
22.9	17.78	282790-1	280390-2	280390-1	8
17.8	12.70	280389-3	280389-2	280389-1	6
12.7	7.62				4
D	B	PART NUMBER	PART NUMBER	PART NUMBER	NO. POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. CAMPIA 12FEB1990	TE TE Connectivity	
		CHK R. CANTORE 12FEB1990		
DIMENSIONS: mm		PRODUCT SPEC 108-20025	NAME AMPMODU II SHROUDED HEADER DUAL ROW, RIGHT ANGLE POST	
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3 0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH		APPLICATION SPEC - WEIGHT -	SIZE A3	
MATERIAL 4		CUSTOMER DRAWING	CAGE CODE 00779	DRAWING NO C-280389
		SCALE 5:1	SHEET 1 OF 1	REV AD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[280393-2](#)