
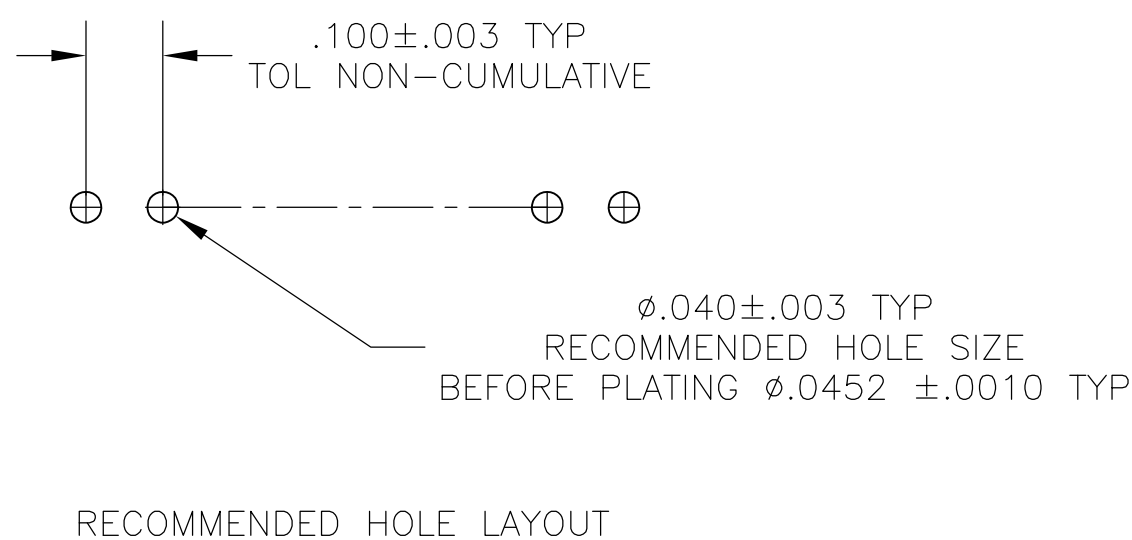



THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- - -
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			F	REVISED PER ECO-14-000066	26JUN2014	NK	MM


- | | |
|---|---|
| 1 | THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING. |
| 2 | POINT OF MEASUREMENT FOR PLATING THICKNESS. |
| 3 | SELECTIVE POSTS ARE FORMED TO PROVIDE CONNECTOR RETENTION TO PC BOARD UNTIL SOLDERED. RETENTION FEATURE IS FOR .055 MINIMUM PC BOARD THICKNESS SEE DETAIL Z FOR FORM AND TABLE FOR LOCATIONS. |
| 4 | BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT. |
| 5 | FINISH: POSTS, .000015 GOLD ON THE CONTACT AREA, .000100--.000200 MATTE TIN--LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL. |
| 6 | FINISH: POSTS, .000015 GOLD ON THE CONTACT AREA, .000100--.000200 MATTE TIN ON THE SOLDER TAIL, ALL OVER .000050 NICKEL. |
| 7 | HIGH TEMPERATURE CONFIGURATION. |
| 8 | OBsolete PARTS: OBsolete CIS STREAMLINING PER D.RENAUD/D.SINISI. |

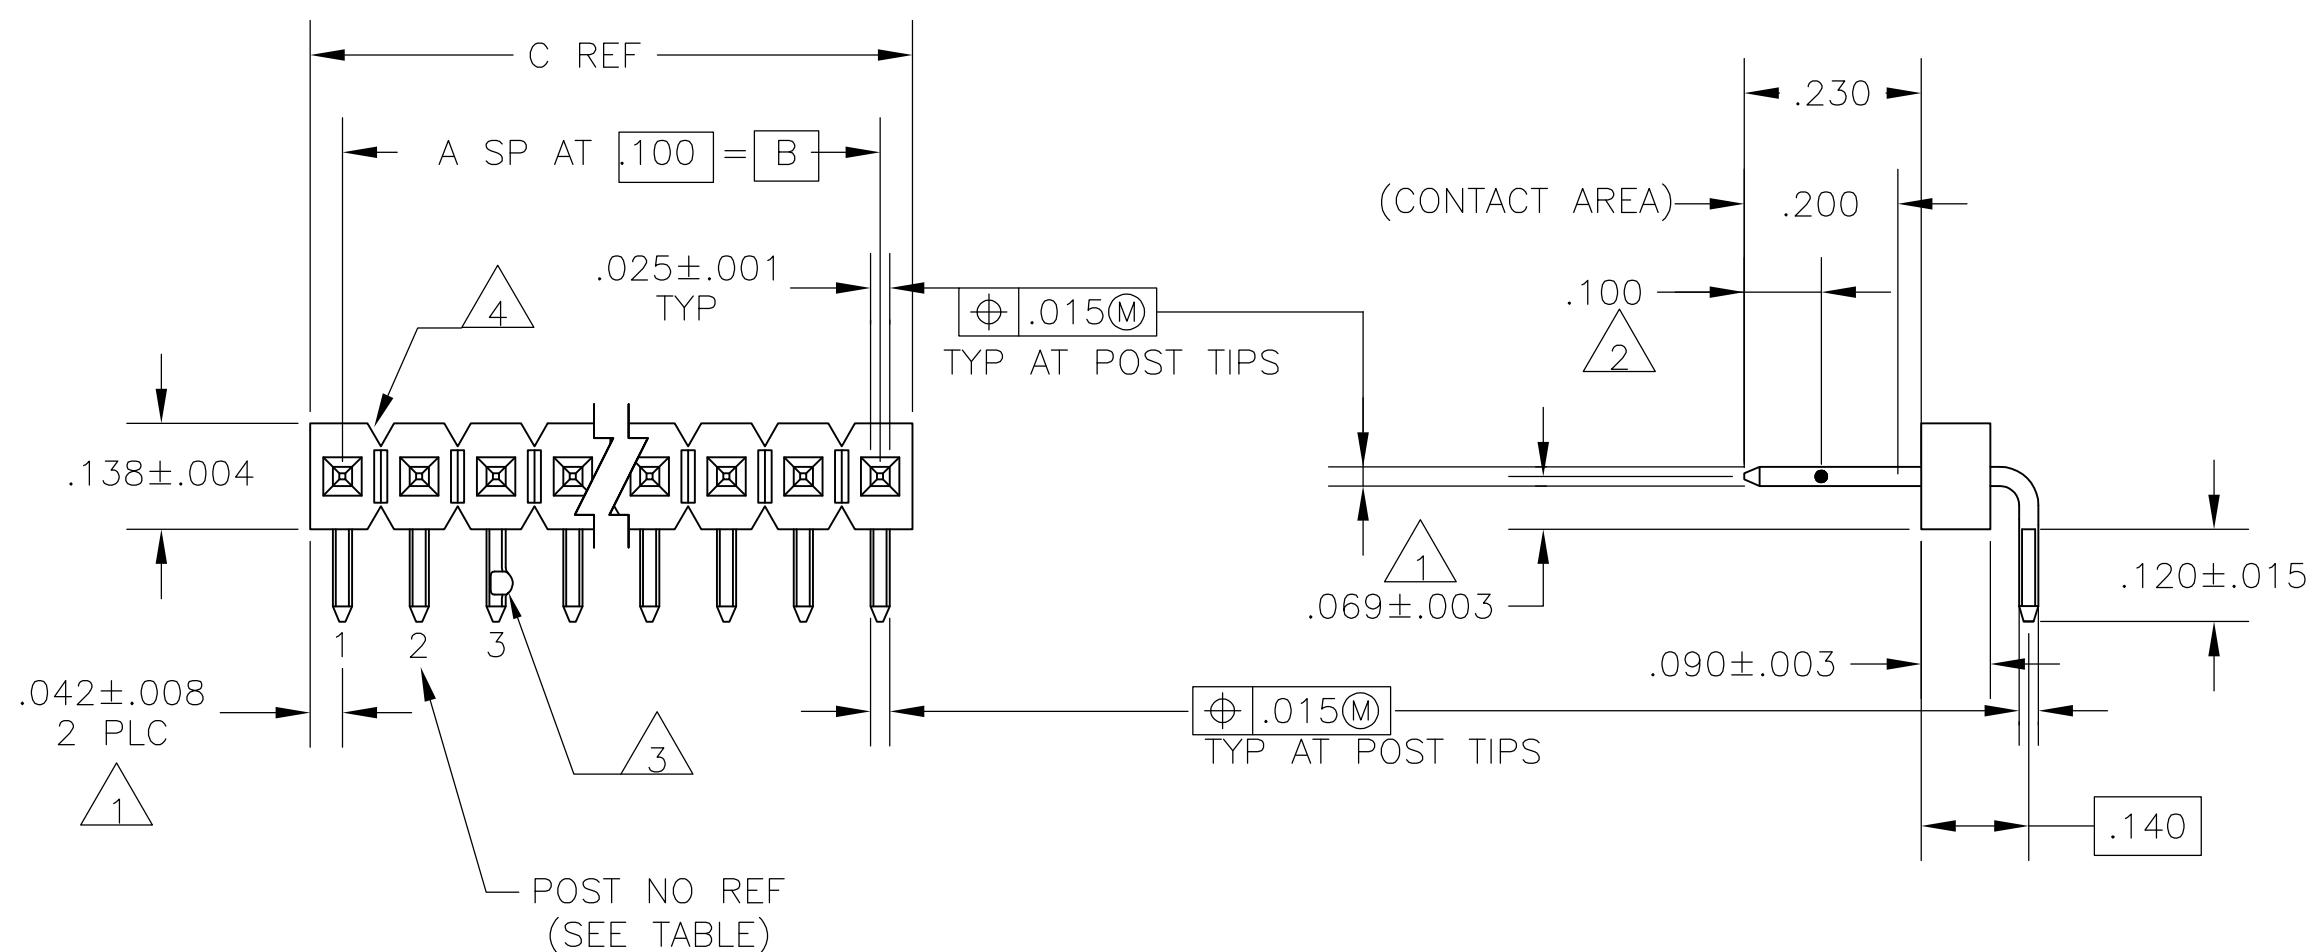

OBSOLETE			1,2,3,4,37,38,39,40	3.984	3.900	39	40	7-104348-7	
			1,2,3,4,32,33,34,35	3.484	3.400	34	35	7-104348-6	
			1,2,3,4,27,28,29,30	2.984	2.900	29	30	7-104348-5	
			1,2,3,4,23,24,25,26	2.584	2.500	25	26	7-104348-4	
			1,2,3,4,22,23,24,25	2.484	2.400	24	25	7-104348-3	
			1,2,3,4,21,22,23,24	2.384	2.300	23	24	7-104348-2	
			1,2,3,4,20,21,22,23	2.284	2.200	22	23	7-104348-1	
			1,2,3,4,19,20,21,22	2.184	2.100	21	22	6-104348-0	
			1,2,3,4,18,19,20,21	2.084	2.000	20	21	6-104348-9	
			1,2,3,4,17,18,19,20	1.984	1.900	19	20	6-104348-8	
			1,2,3,4,16,17,18,19	1.884	1.800	18	19	6-104348-7	
			1,2,3,4,15,16,17,18	1.784	1.700	17	18	6-104348-6	
			1,2,3,4,14,15,16,17	1.684	1.600	16	17	6-104348-5	
			1,2,3,4,13,14,15,16	1.584	1.500	15	16	6-104348-4	
			1,2,3,4,12,13,14,15	1.484	1.400	14	15	6-104348-3	
	 OBSOLETE			1,2,3,4,11,12,13,14	1.384	1.300	13	14	6-104348-2
			1,2,3,4,10,11,12,13	1.284	1.200	12	13	6-104348-1	
			1,2,3,4,9,10,11,12	1.184	1.100	11	12	6-104348-0	
			1,2,3,4,8,9,10,11	1.084	1.000	10	11	5-104348-9	
			1,2,3,4,7,8,9,10	.984	.900	9	10	5-104348-8	
			1,2,3,4,6,7,8,9	.884	.800	8	9	5-104348-7	
			ALL	.784	.700	7	8	5-104348-6	
			ALL	.684	.600	6	7	5-104348-5	
			ALL	.584	.500	5	6	5-104348-4	
			ALL	.484	.400	4	5	5-104348-3	
			ALL	.384	.300	3	4	5-104348-2	
			ALL	.284	.200	2	3	5-104348-1	
 OBSOLETE				1,2,3,4,37,38,39,40	3.984	3.900	39	40	2-104348-7
				1,2,3,4,32,33,34,35	3.484	3.400	34	35	2-104348-6
				1,2,3,4,27,28,29,30	2.984	2.900	29	30	2-104348-5
				1,2,3,4,23,24,25,26	2.584	2.500	25	26	2-104348-4
			1,2,3,4,22,23,24,25	2.484	2.400	24	25	2-104348-3	
			1,2,3,4,21,22,23,24	2.384	2.300	23	24	2-104348-2	
			1,2,3,4,20,21,22,23	2.284	2.200	22	23	2-104348-1	
			1,2,3,4,19,20,21,22	2.184	2.100	21	22	2-104348-0	
			1,2,3,4,18,19,20,21	2.084	2.000	20	21	1-104348-9	
			1,2,3,4,17,18,19,20	1.984	1.900	19	20	1-104348-8	
			1,2,3,4,16,17,18,19	1.884	1.800	18	19	1-104348-7	
			1,2,3,4,15,16,17,18	1.784	1.700	17	18	1-104348-6	
			1,2,3,4,14,15,16,17	1.684	1.600	16	17	1-104348-5	
			1,2,3,4,13,14,15,16	1.584	1.500	15	16	1-104348-4	
			1,2,3,4,12,13,14,15	1.484	1.400	14	15	1-104348-3	
	5-104348-3			1,2,3,4,11,12,13,14	1.384	1.300	13	14	1-104348-2
OBSOLETE			1,2,3,4,10,11,12,13	1.284	1.200	12	13	1-104348-1	
			1,2,3,4,9,10,11,12	1.184	1.100	11	12	1-104348-0	
5-104348-1			1,2,3,4,8,9,10,11	1.084	1.000	10	11	104348-9	
			1,2,3,4,7,8,9,10	.984	.900	9	10	104348-8	
			1,2,3,4,6,7,8,9	.884	.800	8	9	104348-7	
			ALL	.784	.700	7	8	104348-6	
			ALL	.684	.600	6	7	104348-5	
			ALL	.584	.500	5	6	104348-4	
			ALL	.484	.400	4	5	104348-3	
			ALL	.384	.300	3	4	104348-2	
			ALL	.284	.200	2	3	104348-1	

8 SUPERSEDED BY 5-104348-3
8 OBSOLETE
8 SUPERSEDED BY 5-104348-1

REMARKS	PLATING	HOLD-DOWN POST CONFIGURATION LOCATION	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
---------	---------	---	---	---	---	------------------	----------------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.				OWN M. PASTAL CHK R.FEIDT		04FE88 09FB88				TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD R.FEIDT		09FB88		NAME		HEADER ASSY, MOD II, BREAKAWAY, RIGHT ANGLE, SINGLE ROW, .100 C/L, .025 SQ POSTS, W/HOLD-DOWN CONFIG	
INCHES		0 PLG ± — 1 PLG ± — 2 PLG ± .005 3 PLG ± — 4 ANGLES ± ± —		PRODUCT SPEC				SIZE		CAGE CODE	
				APPLICATION SPEC				DRAWING NO		RESTRICTED TO	
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR BLACK CONTACT: COPPER ALLOY		FINISH		SEE TABLE		WEIGHT		A1		00779	
				CUSTOMER DRAWING				SCALE		4:1	
								SHEET		1 of 1	
								REV		F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-104348-7](#)