




Connectors > Automotive Connectors > Automotive Headers > SUPERSEAL 1.0 HEADERS

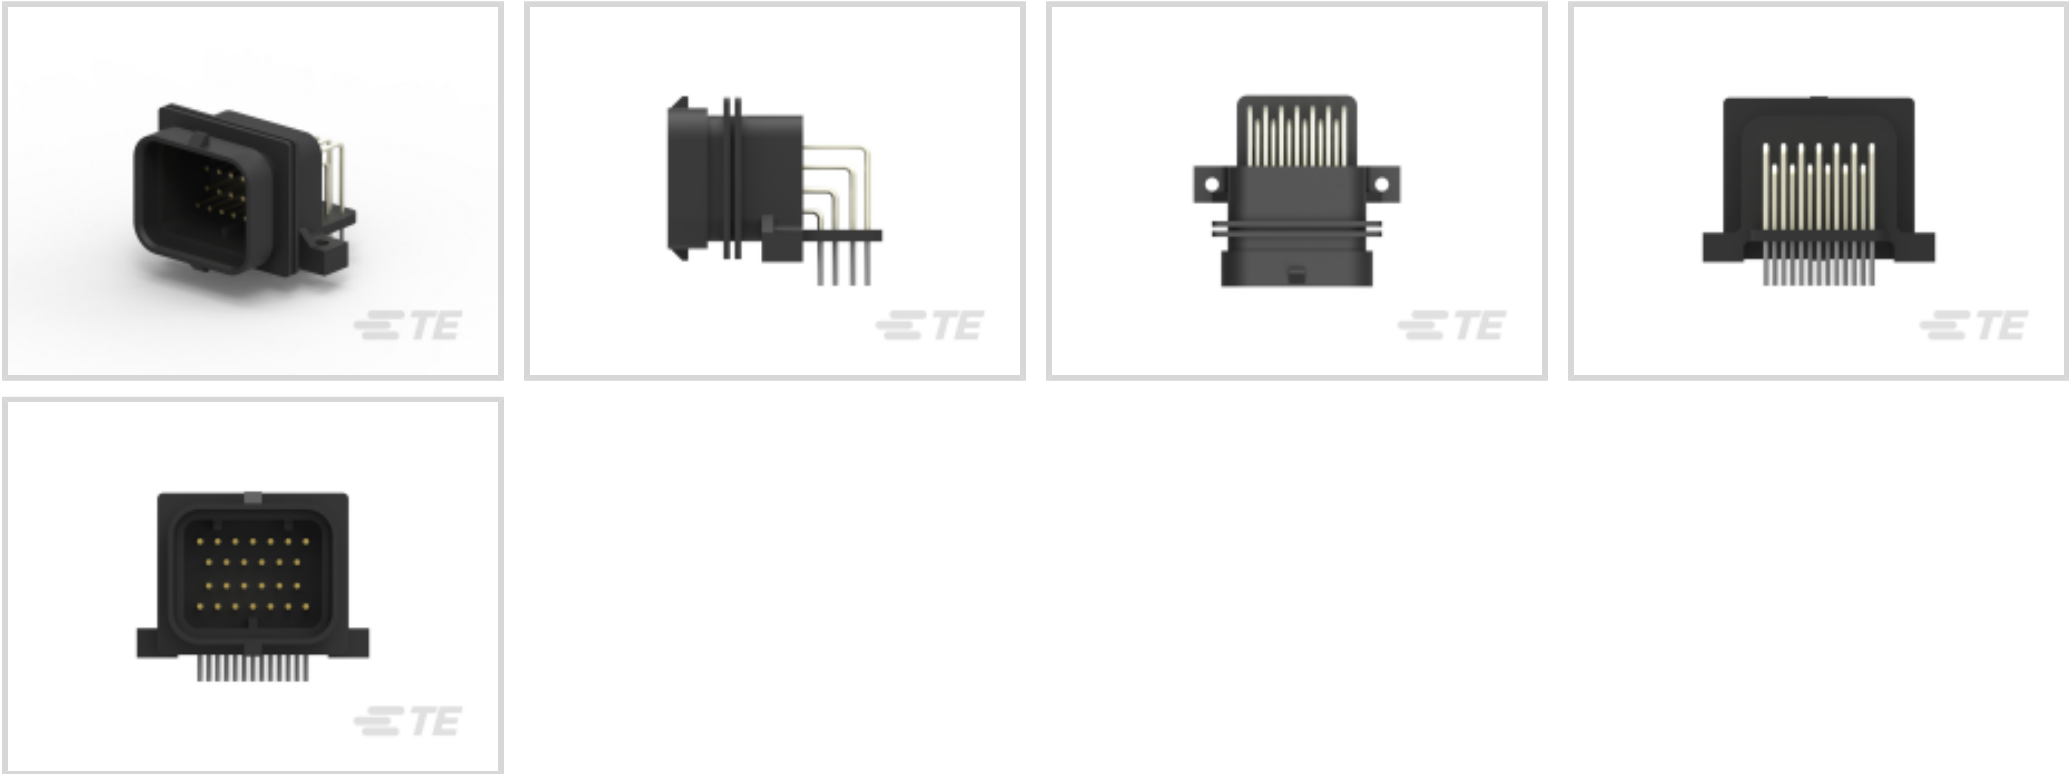

Connector System: **Wire-to-Board, Wire-to-Device**

Number of Positions: **26**

Centerline (Pitch): **3 mm, 3.5 mm [.118 in, .138 in]**

Sealable: **Yes**

PCB Mount Orientation: **Horizontal**

[All SUPERSEAL 1.0 HEADERS \(23\)](#)

Features

Product Type Features

Hybrid Header	No
Connector System	Wire-to-Board, Wire-to-Device
Sealable	Yes
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Signal Positions	26
Number of Positions	26
PCB Mount Orientation	Horizontal
Number of Rows	4

Electrical Characteristics

Voltage Rating (Max)	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 42 V, 48 V, 240 V



Operating Voltage	250 VAC
-------------------	---------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Mating Pin Diameter	1 mm[.039 in]
Contact Mating Area Plating Material	Gold (Au)

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

Mechanical Attachment

Locking Interface	With
Mounting Holes	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without

Housing Features

Centerline (Pitch)	3 mm, 3.5 mm[.118 in][.138 in]
--------------------	--------------------------------

Dimensions

Profile Height from PCB	21.4 mm[.843 in]
Product Width	23 mm[.906 in]
Product Length	39.6 mm[1.56 in]

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[149 °F][158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]
Operating Temperature Range	-40 – 125 °C, -40 – 125 °C[-40 – 257 °F][-40 – 257 °F]

Operation/Application

Shielded	No
----------	----

Industry Standards

Degree of Protection	JIS D0203
UL Flammability Rating	UL 94HB

Packaging Features



Packaging Type	Tube
Packaging Quantity	16

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | SUPERSEAL 1.0mm



Automotive Headers(24)



Automotive Housings(11)



Automotive Seals & Cavity Plugs(1)




Automotive Terminals(6)


Customers Also Bought




TE Part #DT13-08PB
HDR, 8P, BLK, RA, NI/CU, B

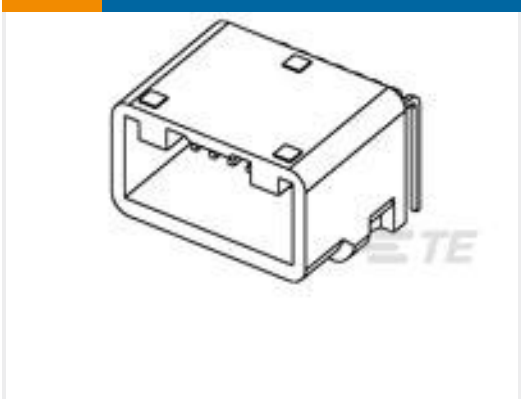


TE Part #1318382-4
025 16POS CAP ASSY H TIN

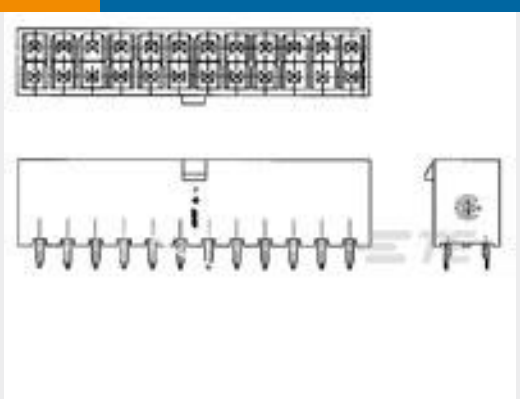


TE Part #1586038-8
8P VRT HDR VAL-U-LOK V0

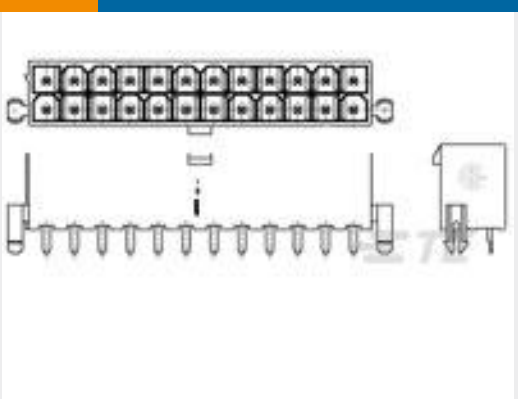

TE Part #1-1586039-6
16P VAL-U-LOK VRT HDR W/P V2

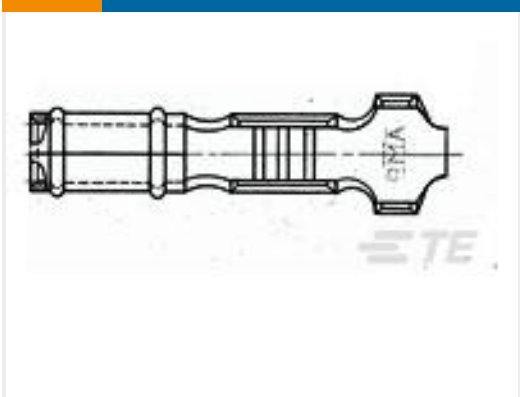

TE Part #170137-1
.058 DIA P.C.B REC LP

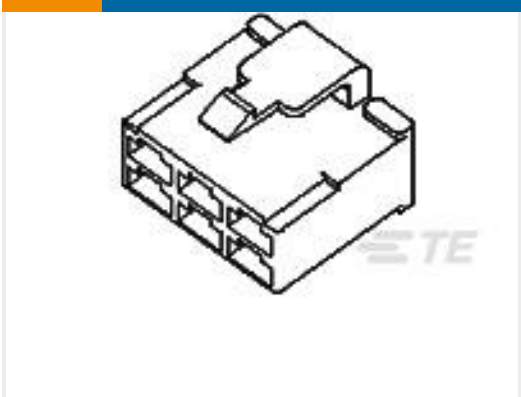

TE Part #171898-4
FF 250 PLUG HSG 6P NYLON GREEN



TE Part #1-1473369-4
SQUIB 11DIA SCR ASSY 8.8MM TYPE



TE Part #1473369-7
SQUIB 11DIA SCR ASSY CODE-A GR



TE Part #1473369-9
SQUIB 11DIA SCR ASSY 8.8MM TYPE



TE Part #172020-1
13P MINI AMPIN HEADER HSG

Documents

Product Drawings

SUPER SEAL 26POS CAP ASSY H AU

Japanese

CAD Files

Customer View Model

ENG_CVM_CVM_2-6437285-8_C.2d_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG_CVM_CVM_2-6437285-8_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-6437285-8_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

Product Specifications

[Receptacle Contact, Super Seal Connector](#)

Japanese

[Application Specification](#)

Japanese

[Super Seal Connector](#)

Japanese

[Application Specification](#)

Japanese

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English

[SUPER SEAL CONNECTOR PLUG HOUSING CONNECTOR](#)

English

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-6437285-8](#)