


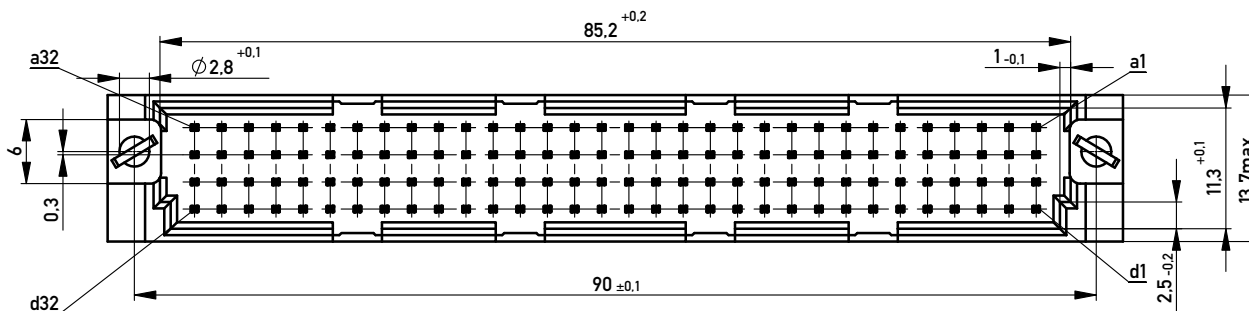
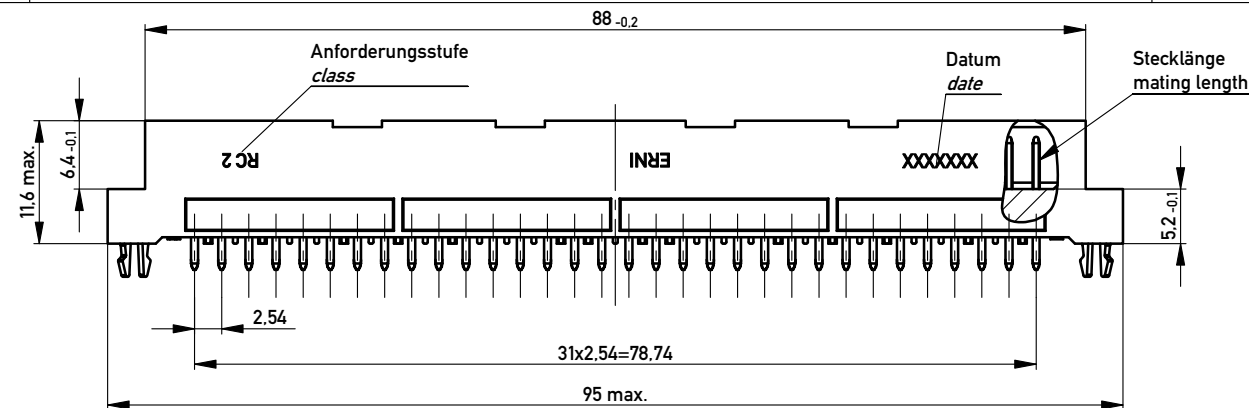
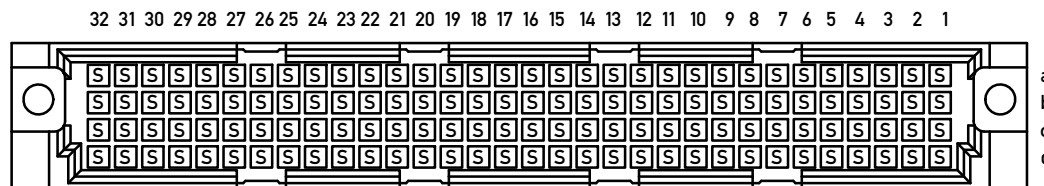


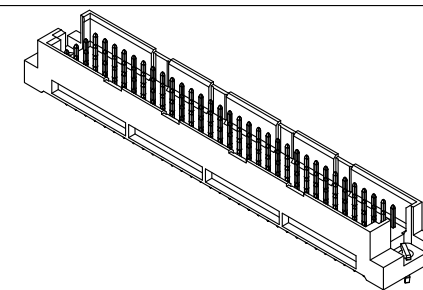


Bestückungsplan / contact layout



Leiterplatten-Lochbild / PCB drillhole pattern

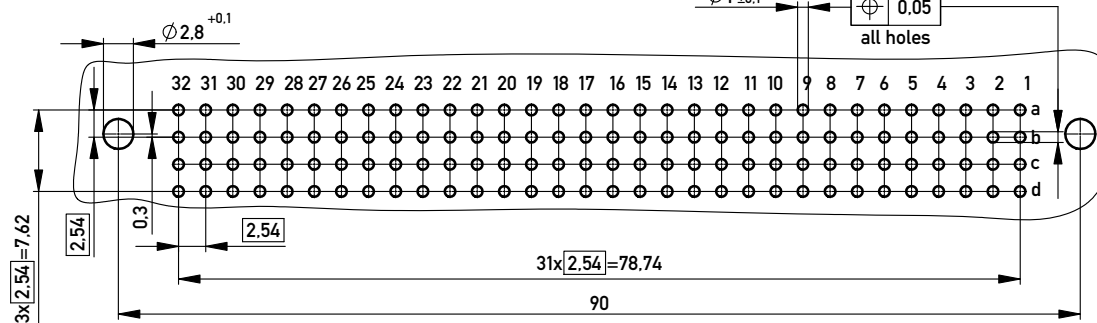

Stecklänge / mating length



E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend

THR = through hole reflow

Bauart 4 / type 4

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
a		03.09.2013		Messerleiste RD 128 THR+Clip	
Index		Date		Male Con. RD 128 THR+Clip	
31		2.54		374460	
90		www.ERNI.com		I	
				A3	
				Class	
				STVRD	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[374460](#) [374460-E](#)