


4805 (1/15)


5	4	3	



2



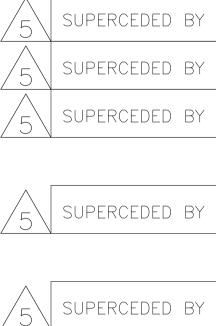

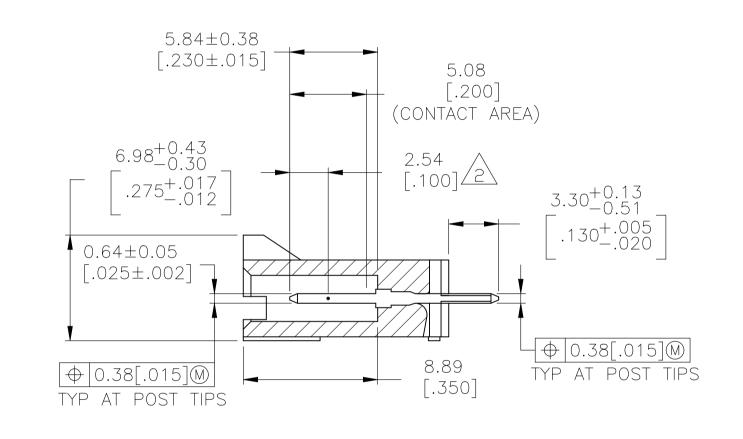

SECTION X - X

THIS DRAWING IS A DIMENSIONS: mm [INCHES] Φ MATERIAL HOUSING :FLAME RETARDANT LCP,COLOR BLACK CONTACTS: BRASS

		2							
					REVISIONS				
		-	P LTR U1	REVISED PER E	DESCRIPTION		DATE 29SEP2022	dwn 2 RK	apvd MF
		_							
\bigwedge_1	000205 00	00157 /				٨			
<u> </u>	.00254[.00	0100] N	MATTE	E TIN-LEAD)NTACT AREA ON REMAIN		CONTAC	Τ,	
\land		L	-	050] NICKE					
<u>2</u>					TING THICK		1		
3	OF THE PC				THE INTER	SECTOR	J		
4	on asseme two polaf				ORE POSITIO	ONS,			
		BLIES W	ITH -	TWO OR THE	ree positic	NS,			
5					REAMLINING	PFR D.R	FNAUD/D.	SINIS	
\wedge		,							
6	0.25 [.010]	RECES	S PE	RMISSIBLE IN	N THIS AREA	FOR MO)LD SHUT	OFF	
BY 7	7-104910-4	64.0)1	65.91	24	25	2-1036		4
		61.4	-7	[2.595] 63.37	23	24			
	7-104910-3		2	[2.495] 60.83	22		2-1036		
BY 7	7-104910-2	$\frac{2.32}{56.3}$		[2.395] 58.29		23	2-1036	}38-	2
		[2.22	20]	[2.295]	21	22	2-103	638-	1
BY 7	7-104910-0	53.8 [2.12	5 20]	55.75 [2.195]	20	21	2-1036	338-	θ—
		51.3 [2.02		53.21 [2.095]	19	20	1-1036	538-	9
BY 6	6-104910-8	48.7 [1.92		50.67 [1.995]	18	19	1-1036	<u> </u>	8—
		46.2	23	48.13 [1.895]	17	18	1-1036		7
		_ 43.6	<u> </u>	45.59	16	17	1-1036		
		[1.72 41.1	5	[1.795]	15	16			
		[1.62 _38.6	51	[1.695] _40.51_	14	15	1-1036		
		[1.52 36.C	_	[1.595] 37.97			1-1036		
		[1.42]	20]	[1.495] 35.43	13	14	1-1036	338-	3
		[1.32	20]	[1.395]	12	13	1-1036	338-	2
		30.9 [1.22		32.89 [1.295]	1 1	12	1-1036	338-	1
		28.4 [1.12		30.35 [1.195]	10	1 1	1-1036	538-	0
		25.9		27.81 [1.095]	9	10	1036	638-	9
		23.3	57_	25.27 [.995]	8	9	1036	638-	8
		20.8	33	22.73	7	8		638-	
		[.82	29	[.895]	6	7			
		[.72		[.795]				538-	
		[.62	0]	[.695]	5	6	1036	638-	5
		13.2	0]	15.11 [.595]	4	5	1036	638-	4
		10.6 [.42		12.57 [.495]	3	4	1036	638-	3
		8.1		10.03 [.395]	2	3	1036	638-	2
		5.59	9	7.49	1	2	10.36	638-	1
						NO.			
		С		В	A	OF POSN	PART	NO	•
				3-5-91					

A CONTROLLED DOCUMENT				E Connectivity	,
$\begin{array}{c c} & \text{TOLERANCES UNLESS} \\ & \text{OTHERWISE SPECIFIED:} \end{array}$	APVD 3-5-91 J. GESFORD PRODUCT SPEC 108-25034 APPLICATION SPEC		HDR ASSY, VERT, S 4[.100] CL, 0.64[. WITHATPOLIZM		
4 PLC ± – ANGLES ± –	114-25026	SIZE CAGE CODE	-		RESTRICTED TO
T FINISH	WEIGHT	A 1 00779	9 C- 103638		
	CUSTOMER DRAWING	· ·	SCALE 4:1	SHEET OF	1 REV 1 U 1

1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: <u>1-103638-3</u>