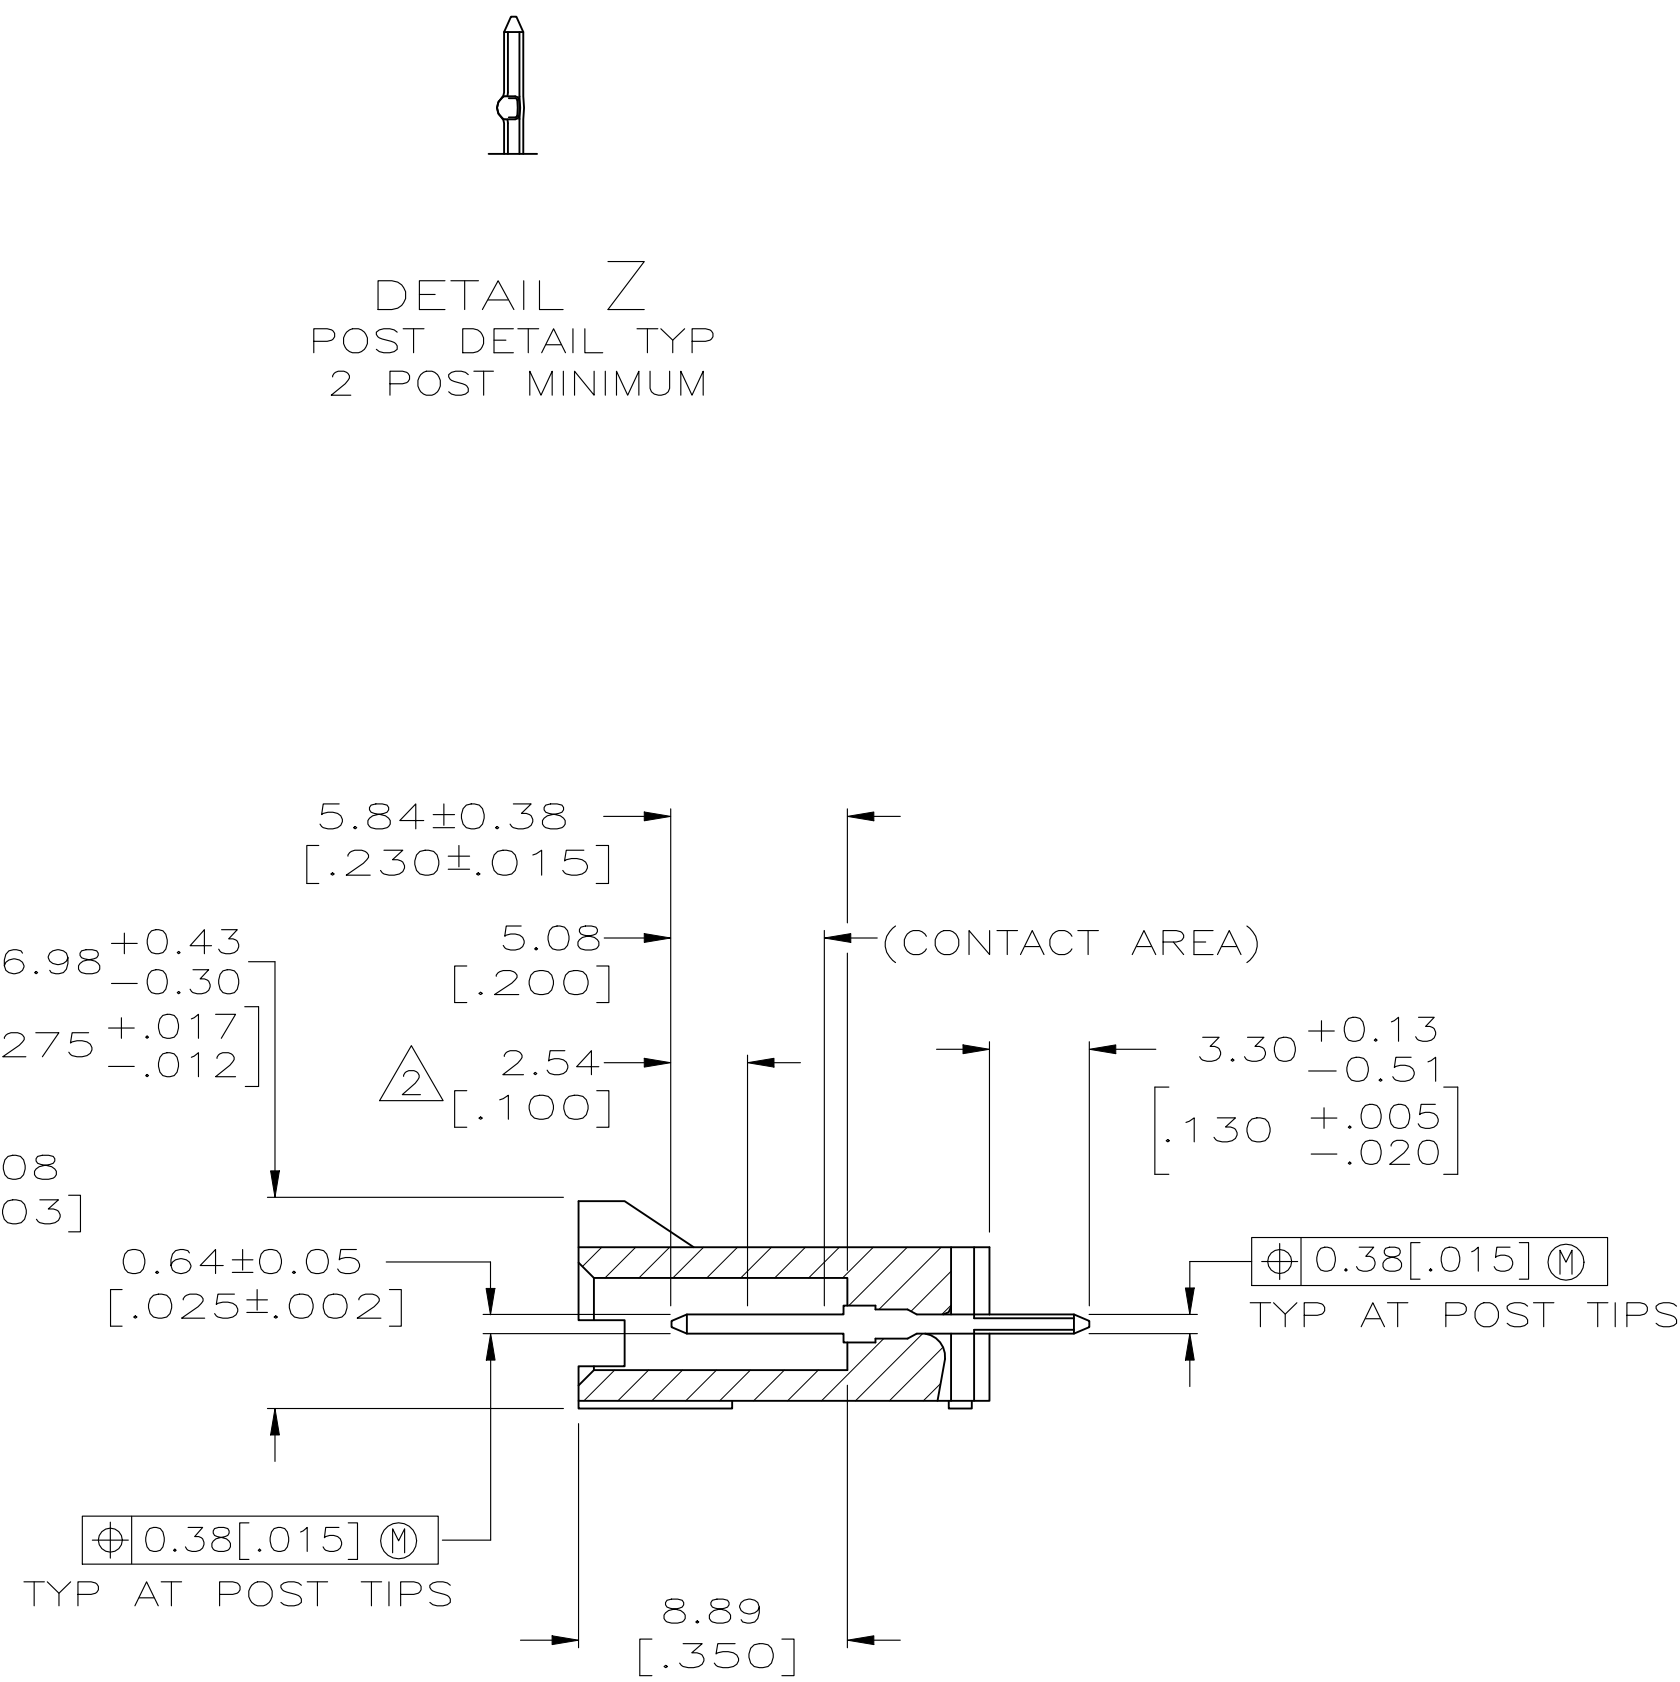
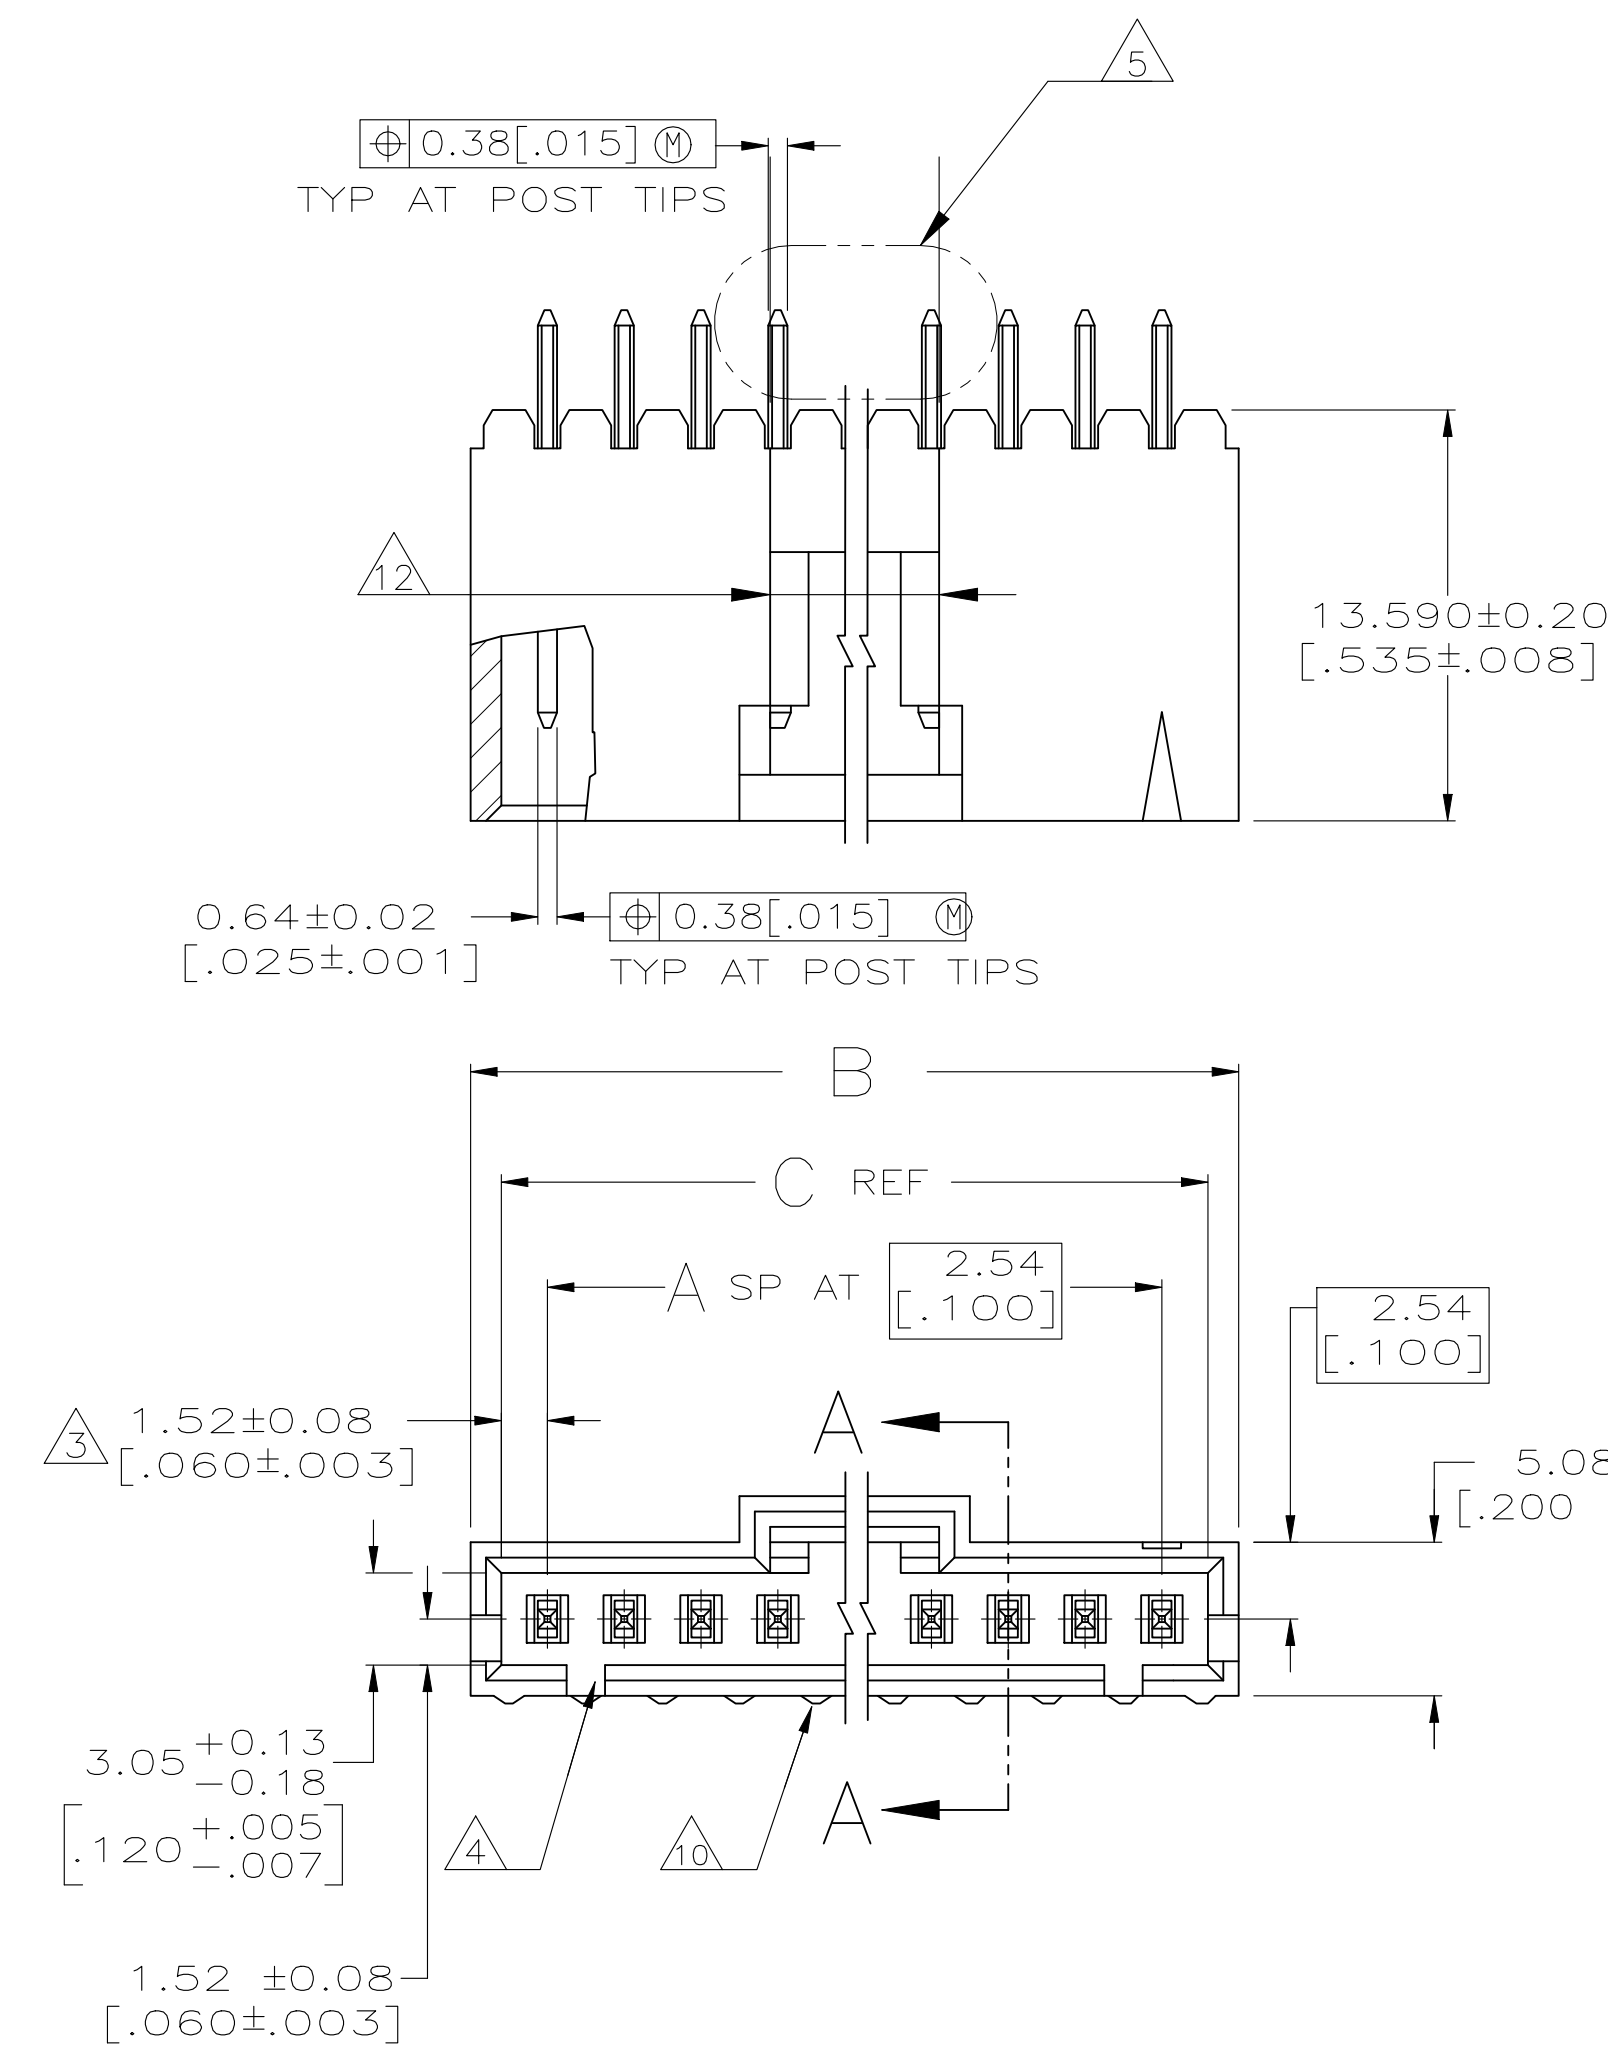
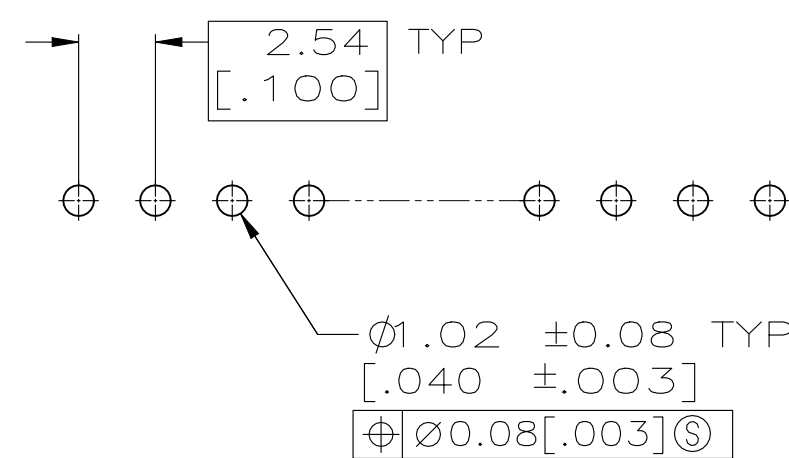


P		LTR	DESCRIPTION	DATE	DWN	APVD
		AD1	REVISED PER ECN-22-174625	16SEP2022	RK	MF








SECTION A-A



RECOMMENDED HOLE LAYOUT

1. .000100 BRIGHT TIN—LEAD OVER .000050 NICKEL.
2. POINT OF MEASUREMENT FOR PLATING THICKNESS.
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
4. ON ASSEMBLIES WITH FOUR OR MORE POSITIONS, TWO POLARIZATION SLOTS.
ON ASSEMBLIES WITH TWO OR THREE POSITIONS, ONE POLARIZATION SLOT.
5. SELECT POST TAILS FORMED TO PROVIDE CONNECTOR HOLD DOWN UNTIL SOLDERED. CONFIGURATION ACCEPTS 0.69[.027]–2.03[.080] THICK PRINTED CIRCUIT BOARD. (SEE DETAIL Z).
6. .000100 BRIGHT TIN OVER .000050 NICKEL.
7. PRELIMINARY PART — NOT RELEASED FOR PRODUCTION.
8. .000100 MATTE TIN OVER .000050 NICKEL.
9. HIGH TEMPERATURE CONFIGURATION.
10. STANDOFFS NOT PRESENT ON UNDERSIDE OF ASSEMBLY
11. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS
12. 0.25 [.010] RECESS PERMISSIBLE IN THIS AREA FOR MOLD SHUT OFF

				23.37 [.920]	25.27 [.995]	8	9	3-103669-0
				8.13 [.320]	10.03 [.395]	2	3	2-103669-9
				15.75 [.620]	17.65 [.695]	5	6	2-103669-8
				13.21 [.520]	15.11 [.595]	4	5	2-103669-7
				10.67 [.420]	12.57 [.495]	3	4	2-103669-6
				5.59 [.220]	7.49 [.295]	1	2	2-103669-5
	OBsolete			64.01 [2.520]	65.91 [2.595]	24	25	2-103669-4
	OBsolete			61.47 [2.420]	63.37 [2.495]	23	24	2-103669-3
	OBsolete			58.93 [2.320]	60.83 [2.395]	22	23	2-103669-2
	OBsolete			56.39 [2.220]	58.29 [2.295]	21	22	2-103669-1
	OBsolete			53.85 [2.120]	55.75 [2.195]	20	21	2-103669-0
				51.31 [2.020]	53.21 [2.095]	19	20	1-103669-9
	OBsolete			48.77 [1.920]	50.67 [1.995]	18	19	1-103669-8
	OBsolete			46.23 [1.820]	48.13 [1.895]	17	18	1-103669-7
				43.69 [1.720]	45.59 [1.795]	16	17	1-103669-6
				41.15 [1.620]	43.05 [1.695]	15	16	1-103669-5
	OBsolete			38.61 [1.520]	40.51 [1.595]	14	15	1-103669-4
				36.07 [1.420]	37.97 [1.495]	13	14	1-103669-3
				33.53 [1.320]	35.43 [1.395]	12	13	1-103669-2
				30.99 [1.220]	32.89 [1.295]	11	12	1-103669-1
				28.45 [1.120]	30.35 [1.195]	10	11	1-103669-0
				25.91 [1.020]	27.81 [1.095]	9	10	103669-9
				23.37 [.920]	25.27 [.995]	8	9	103669-8
				20.83 [.820]	22.73 [.895]	7	8	103669-7
				18.29 [.720]	20.19 [.795]	6	7	103669-6
				15.75 [.620]	17.65 [.695]	5	6	103669-5
				13.21 [.520]	15.11 [.595]	4	5	103669-4
				10.67 [.420]	12.57 [.495]	3	4	103669-3
				8.13 [.320]	10.03 [.395]	2	3	103669-2
				5.59 [.220]	7.49 [.295]	1	2	103669-1
		REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DIN S ₁ SHURY 3-5-91		 TE Connectivity				
				GW M. RIDER 2-14-92						
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APRD M. RIDER 2-14-92		NAME				
		0 PLG ± -		PRODUCT SPEC		HDR ASSY, VERT, SR				
		1 PLG ± -		108-25034		2.54 [100] C/L 0.64 [025] SQ POST				
		2 PLG ± ± 0.13(05)		APPLICATION SPEC		WITH PLZN, AMPDU MTE				
		3 PLG ± -		114-25026		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
		4 PLG ± ± -		FINISH		A1	00779	C-103669		
MATERIAL		WEIGHT	-	CUSTOMER DRAWING		SCALE		SHEET	REV	
HOUSING: LCP, CONTACTS: BRASS	SEE TABLE					4:1		1 OF 2	AD1	

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

OBSOLETE

11

9 10	8	64.01 [2.520]	65.91 [2.595]	24	25	7-103669-4
9 10	8	61.47 [2.420]	63.37 [2.495]	23	24	7-103669-3
9 10	8	58.93 [2.320]	60.83 [2.395]	22	23	7-103669-2
9 10	8	56.39 [2.220]	58.29 [2.295]	21	22	7-103669-1
9 10	8	53.85 [2.120]	55.75 [2.195]	20	21	7-103669-0
9 10	8	51.31 [2.020]	53.21 [2.095]	19	20	6-103669-9
9 10	8	48.77 [1.920]	50.67 [1.995]	18	19	6-103669-8
9 10	8	46.23 [1.820]	48.13 [1.895]	17	18	6-103669-7
9 10	8	43.69 [1.720]	45.59 [1.795]	16	17	6-103669-6
9 10	8	41.15 [1.620]	43.05 [1.695]	15	16	6-103669-5
9 10	8	38.61 [1.520]	40.51 [1.595]	14	15	6-103669-4
9 10	8	36.07 [1.420]	37.97 [1.495]	13	14	6-103669-3
9 10	8	33.53 [1.320]	35.43 [1.395]	12	13	6-103669-2
9 10	8	30.99 [1.220]	32.89 [1.295]	11	12	6-103669-1
9 10	8	28.45 [1.120]	30.35 [1.195]	10	11	6-103669-0
9 10	8	25.91 [1.020]	27.81 [1.095]	9	10	5-103669-9
9 10	8	23.37 [.920]	25.27 [.995]	8	9	5-103669-8
9 10	8	20.83 [.820]	22.73 [.895]	7	8	5-103669-7
9 10	8	18.29 [.720]	20.19 [.795]	6	7	5-103669-6
9 10	8	15.75 [.620]	17.65 [.695]	5	6	5-103669-5
9 10	8	13.21 [.520]	15.11 [.595]	4	5	5-103669-4
9 10	8	10.67 [.420]	12.57 [.495]	3	4	5-103669-3
9 10	8	8.13 [.320]	10.03 [.395]	2	3	5-103669-2
9 10	8	5.59 [.220]	7.49 [.295]	1	2	5-103669-1
REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.

11

OBSOLETE

9 10	8	64.01 [2.520]	65.91 [2.595]	24	25	7-103669-4
9 10	8	61.47 [2.420]	63.37 [2.495]	23	24	7-103669-3
9 10	8	58.93 [2.320]	60.83 [2.395]	22	23	7-103669-2
9 10	8	56.39 [2.220]	58.29 [2.295]	21	22	7-103669-1
9 10	8	53.85 [2.120]	55.75 [2.195]	20	21	7-103669-0
9 10	8	51.31 [2.020]	53.21 [2.095]	19	20	6-103669-9
9 10	8	48.77 [1.920]	50.67 [1.995]	18	19	6-103669-8
9 10	8	46.23 [1.820]	48.13 [1.895]	17	18	6-103669-7
9 10	8	43.69 [1.720]	45.59 [1.795]	16	17	6-103669-6
9 10	8	41.15 [1.620]	43.05 [1.695]	15	16	6-103669-5
9 10	8	38.61 [1.520]	40.51 [1.595]	14	15	6-103669-4
9 10	8	36.07 [1.420]	37.97 [1.495]	13	14	6-103669-3
9 10	8	33.53 [1.320]	35.43 [1.395]	12	13	6-103669-2
9 10	8	30.99 [1.220]	32.89 [1.295]	11	12	6-103669-1
9 10	8	28.45 [1.120]	30.35 [1.195]	10	11	6-103669-0
9 10	8	25.91 [1.020]	27.81 [1.095]	9	10	5-103669-9
9 10	8	23.37 [.920]	25.27 [.995]	8	9	5-103669-8
9 10	8	20.83 [.820]	22.73 [.895]	7	8	5-103669-7
9 10	8	18.29 [.720]	20.19 [.795]	6	7	5-103669-6
9 10	8	15.75 [.620]	17.65 [.695]	5	6	5-103669-5
9 10	8	13.21 [.520]	15.11 [.595]	4	5	5-103669-4
9 10	8	10.67 [.420]	12.57 [.495]	3	4	5-103669-3
9 10	8	8.13 [.320]	10.03 [.395]	2	3	5-103669-2
9 10	8	5.59 [.220]	7.49 [.295]	1	2	5-103669-1
REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
HOUSING: LCP,
CONTACTS: BRASS

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0. PLC
1. PLC
2. PLC
3. PLC
4. PLC
ANGLES

± -
± -
± 0.13[.005]
± -
± -

SEE TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S. SHUEY
CHK
M. RIDER
APVD
M. RIDER

3-5-91
2-14-92
2-14-92

PRODUCT SPEC
108-25034

APPLICATION SPEC
114-25026

WEIGHT
—

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV AD1

TE Connectivity

HDR ASSY, VERT, SR
2.54 .100 C/L 0.64 .025 SQ POST
WITH PLZN, AMPMODU MTE

SIZE A1

CAGE CODE 00779

DRAWING NO 103669

RESTRICTED TO —

4805 (1/15)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-103669-1](#)