
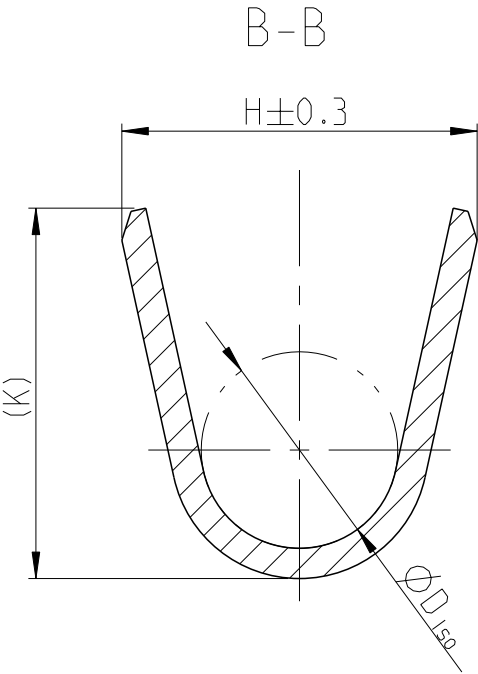
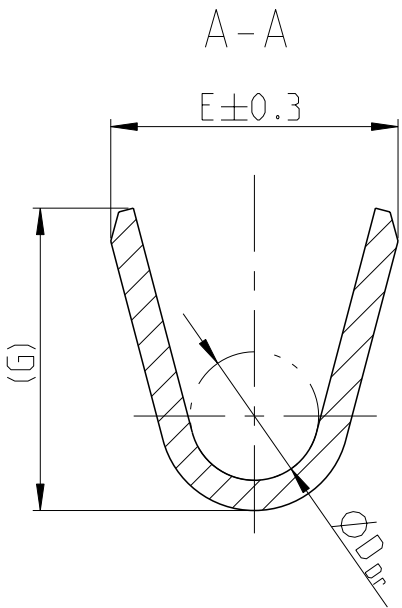
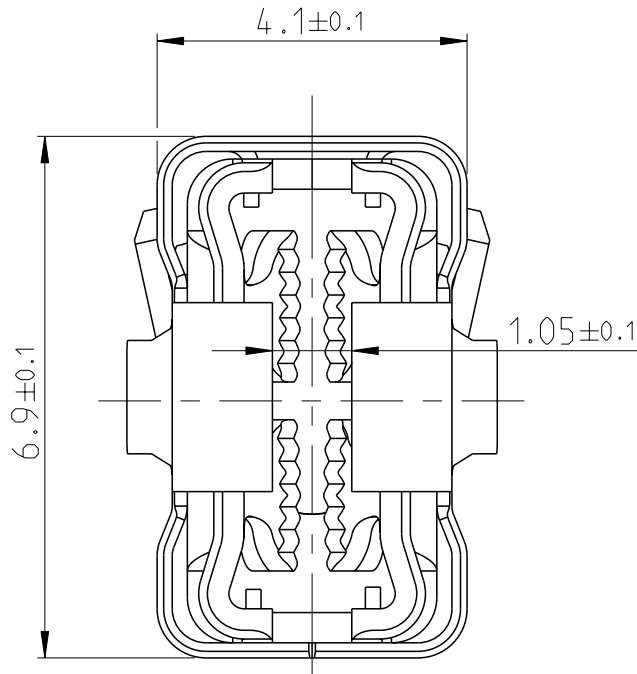


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-			SEE SHEET 1			

AMP MCP 6.3/4.8K FOR FUSES



AMP MCP 6.3/4.8K fuer Sicherungen

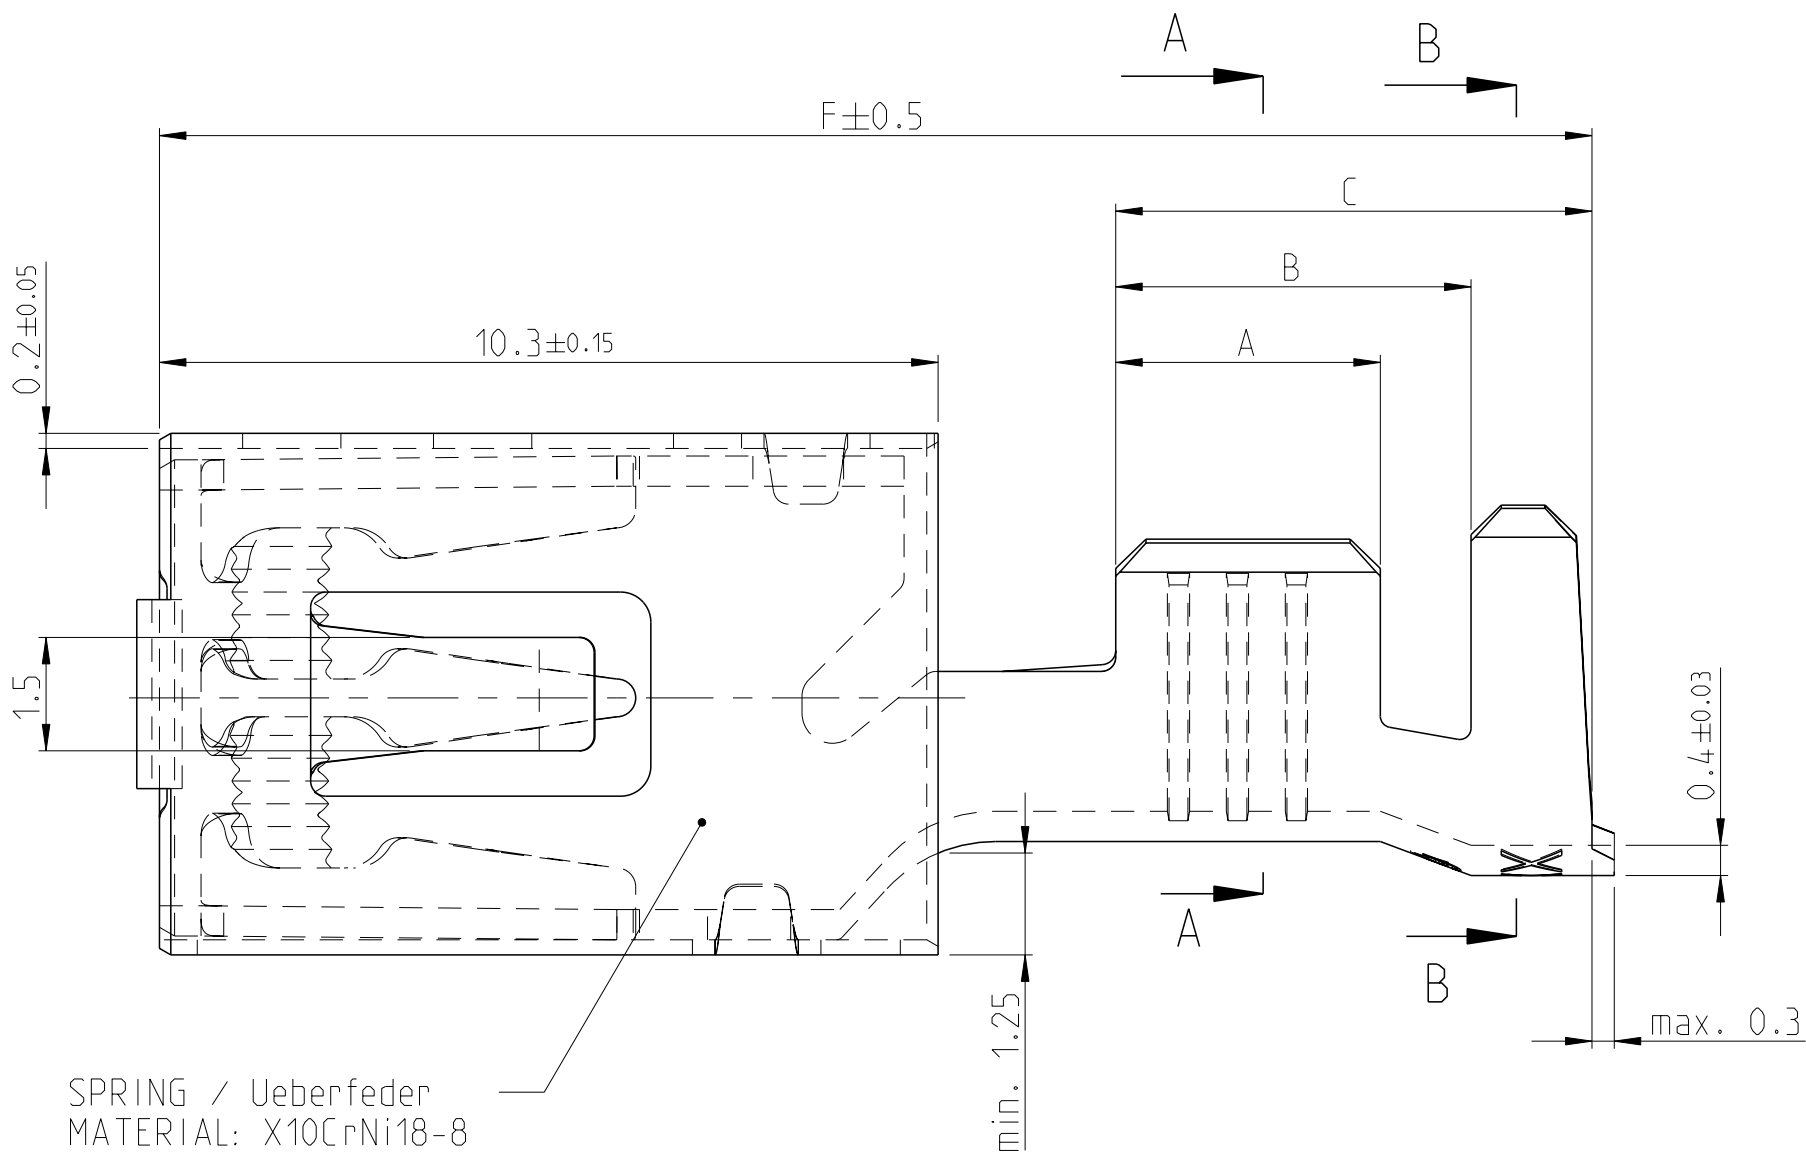

NOTES

Bemerkungen

- 1 LASERWELDED
Lasergeschweisst
- 2 DIFFERENT FORM AND NUMBER OF THE SERRATIONS POSSIBLE
Unterschiedliche Ausfuehrung und Anzahl der Rillen moeglich
- 3 SILVER PLATED VERSIONS ARE MARKED WITH "Ag"
Versilberte Versionen sind mit "Ag" gekennzeichnet
- 4 DIFFERENT ASSEMBLY CAUSED BY PRODUCTION OF THE SPRING ON THE BODY.
SPOTWELDS CAN BE ABOVE OR DOWN.
Fertigungsbedingte unterschiedliche Montage der Ueberfeder auf dem Body moeglich.
Der Stoss kann sich oben oder unten befinden.
- 5 USED WITH MEDIUM FUSE 0.64 ± 0.04mm x 5.25 ± 0.15mm
(COMPLIANT WITH ATO[®] FUSE TECHNOLOGY)
ATO[®] IS A REGISTERED TRADE MARK OF LITTELFUSE INC.
Verwendet mit Medium Sicherung 0.64 ± 0.04mm x 5.25 ± 0.15mm
(kompatibel mit ATO[®]-fuse Technologie)
ATO[®] ist ein eingetragener Markenname von Littelfuse Inc.
- 6 USED WITH MaxiCompact FUSE 0.81 ± 0.03mm x 6.3 ± 0.2mm
MaxiCompact IS A REGISTERED TRADE MARK OF MTA
Verwendet mit MaxiCompact Fuse 0.81 ± 0.03mm x 6.3 ± 0.2mm
MaxiCompact ist ein eingetragener Markenname von MTA
- 7 MaxiCompact FUSE VERSIONS ARE MARKED WITH A SECOND HOLE AT THE SPRING
MaxiCompact Fuse Versionen sind mit einem zweiten Loch in der Ueberfeder gekennzeichnet.

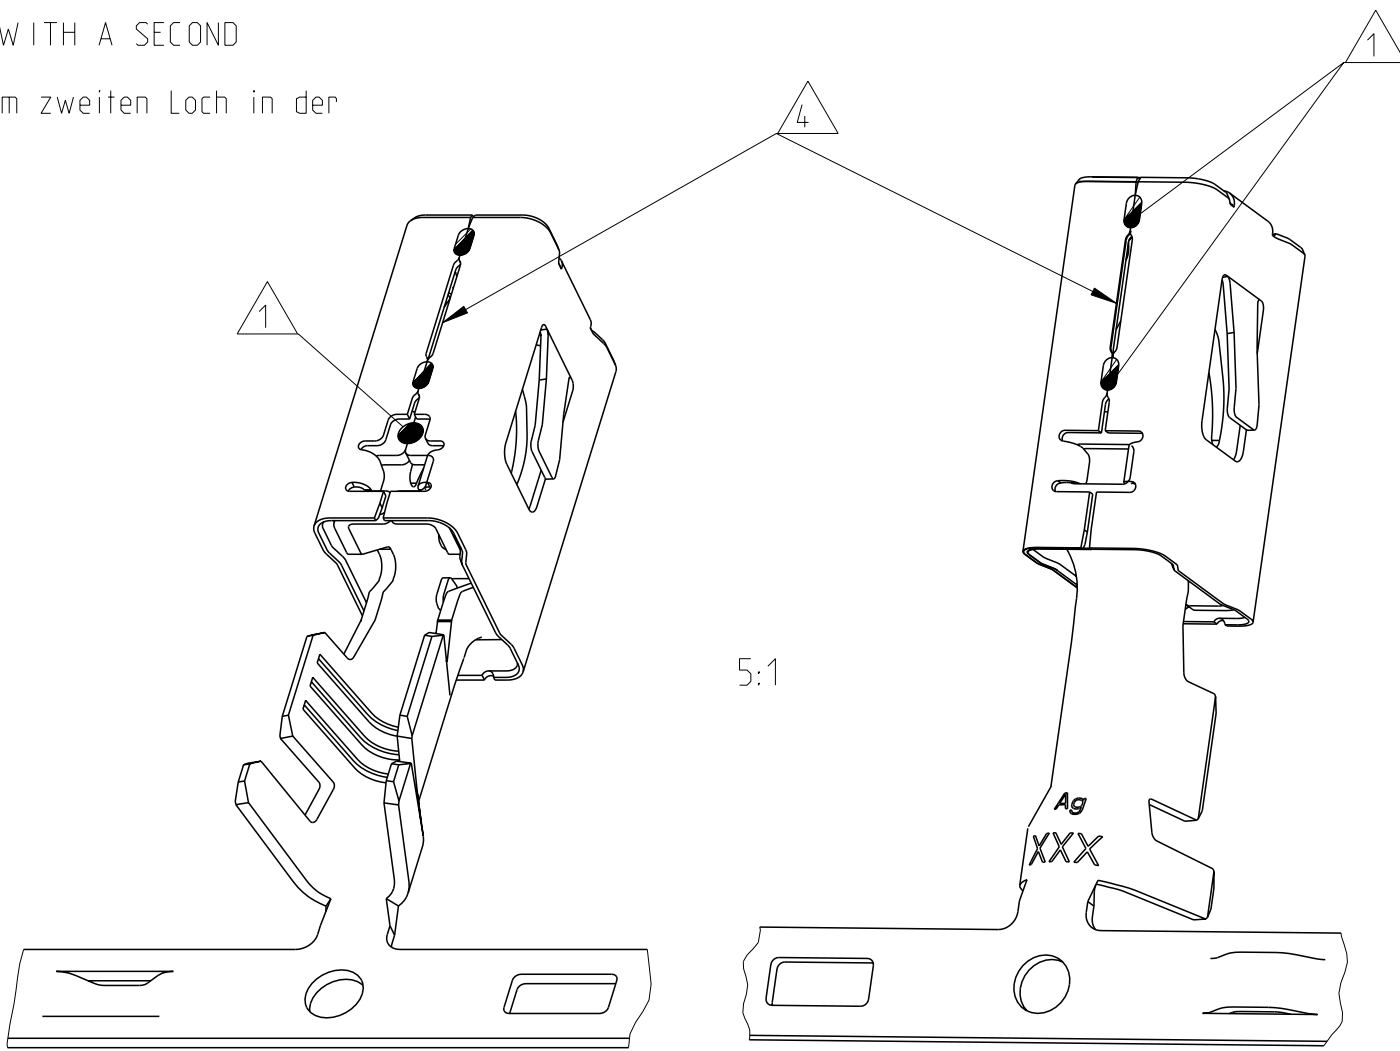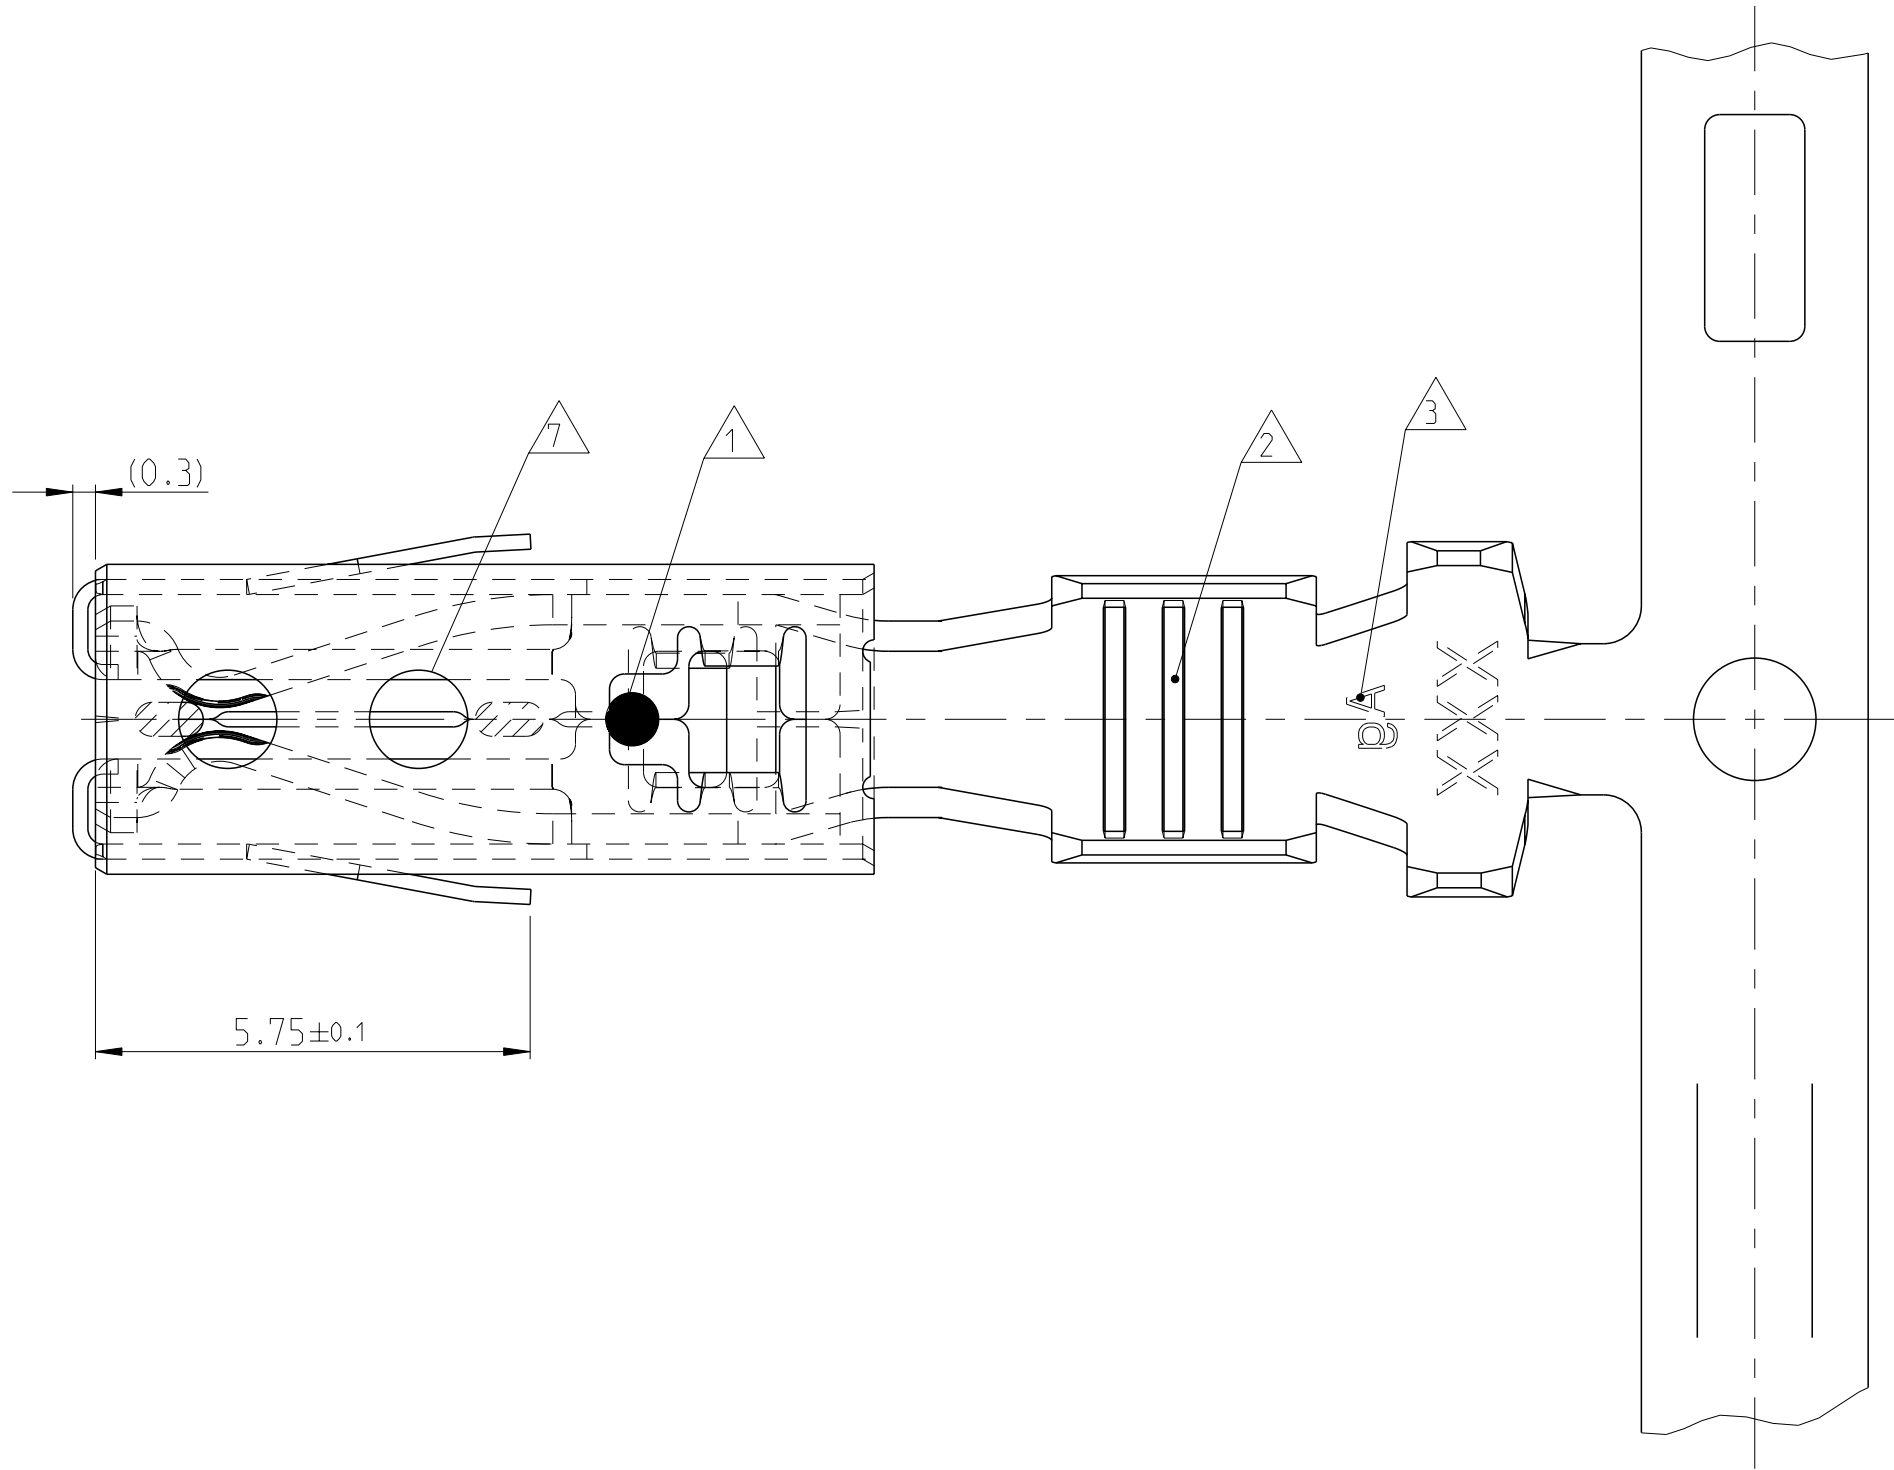

1-2177995-3 	A	>4.0-6.0	4.0-4.3	CuNiSi	SILVER PLATED versilbert	4.5	6.0	7.8	19.95	E = 5.3 G = 5.6 D _{Dr} = 2.9	H = 6.7 K = 7.0 D _{Iso} = 3.9
1-2333552-3  	A										
1-2208461-3 	A	>2.5-4.0	3.3-4.5	CuNiSi	SILVER PLATED versilbert	4.0	5.2	6.8	19.05	E = 4.6 G = 4.8 D _{Dr} = 2.4	H = 6.4 K = 6.7 D _{Iso} = 4.0
1-2333551-3  	A										
1-2208460-3 	A	>1.0-2.5	2.2-3.0	CuNiSi	SILVER PLATED versilbert	3.5	4.7	6.3	19.05	E = 3.8 G = 4.0 D _{Dr} = 1.7	H = 4.7 K = 4.9 D _{Iso} = 2.6
1-2333550-3  	A										
1-2208459-3 	A	0.5-1.0	1.4-2.1	CuNiSi	SILVER PLATED versilbert	3.0	4.2	5.8	19.05	E = 2.8 G = 3.0 D _{Dr} = 1.1	H = 3.8 K = 4.1 D _{Iso} = 1.8
-	-				-						
ORDER NO. STRIP Bestell-Nr. Bandware	Rev.	WIRE RANGE Drahtgroessen Bereich (mm ²)	INSULATION- Ø Isolations- Ø (mm)	MATERIAL Werkstoff	SURFACE IN CONTACT AREA Oberflaeche im Kontaktbereich	A	B	C	F	WIRE CRIMP Drahtcrimp	INSULATION CRIMP Isolations Crimp
CRIMP DIMENSION Crimpabmessungen (mm)											

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. Kirschbaum CHK A. Mairosen APVD C. Goepfel	12DEC2013 13DEC2013 13DEC2013	 TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME AMP MCP6.3/4.8K FLATCONTACT AMP MCP6.3/4.8K Flachkontakt PRODUCT GROUP DRAWING	SIZE A1	CAGE CODE 00779	DRAWING NO. 1241438
		1-PLC 2-PLC 3-PLC 4-PLC ±0.2					
		±0.1 ±0.1					
MATERIAL -		FINISH -					
Customer Drawing		SCALE 10:1		SHEET 2 OF 2		REV. A17	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1241402-1](#)