

D


С

В

А

4

3

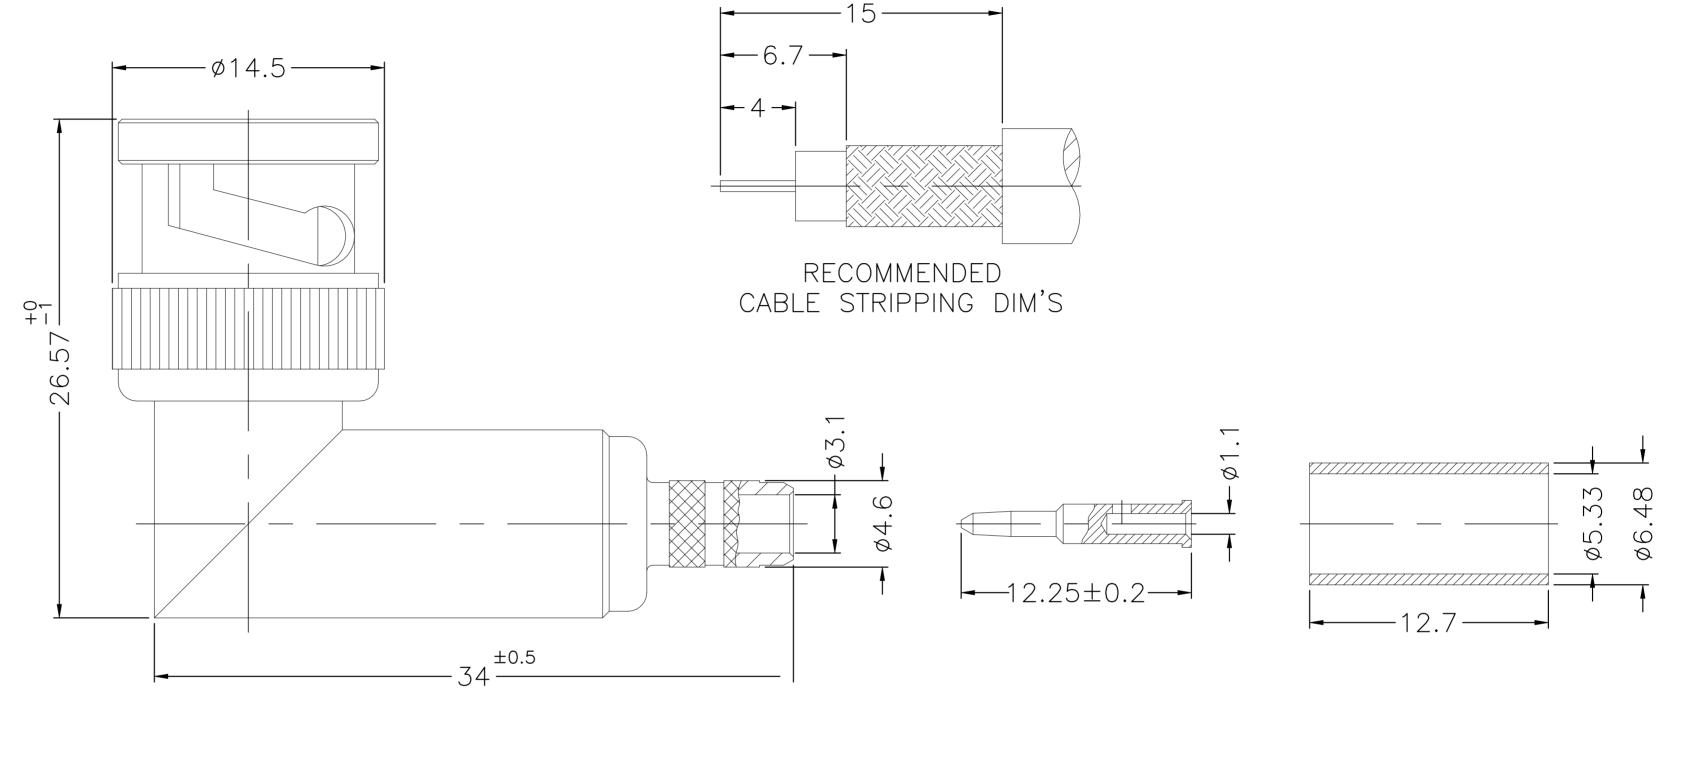

## <u>NOTES:</u>

- 1 PACK IN ACCORDANCE WITH TE SPEC 107-3275;
- 2 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED;
- 3 ELECTRICAL CHARACTERISTICS : FREQUENCY RANGE : DC-4GHz NOMINAL IMPEDANCE : 50 OHMS INSULATION RESISTANCE : 5000 MOHMS WORKING VOLTAGE : 335 VRMS MAX DIELECTRIC WITHSTANDING VOLTAGE : 750 VOLTS MAX VSWR : 1.2(DC-4GHz)CONTACT RESISTANCE : CENTER CONTACT : 3 mOHMS MAX OUTER CONTACT : 2 mOHMS MAX;
- 4 MECHANICAL CHARACTERISTICS : DURABILITY : 500 CYCLES CABLE RETENTION FORCE(Cable assembly): 20 lbs min;
- 5 TEMPERATURE RANGE:  $-65^{\circ}-+165^{\circ};$
- 6 Rohs: COMPLIANT;
- 7 CRIMPED FERRULE, HEX CRIMP SIZE .213; CRIMPED CONTACT PIN, HEX CRIMP SIZE .068".

		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	А	GTP(ECN-23-231222)	15SEP2023	ЕD	WH

2

			1	BRIGHT TIN 200u"/NICKEL/COPPER	COPPER	FERRULE	13
			1	GOLD 50u"/NICKEL/COPPER	BRASS	CONTACT PIN	12
			1	NICKEL 100u"/COPPER	BRASS	BARREL	11
			1	NATURAL	PTFE	INSULATOR	10
			1	NICKEL 100u"/COPPER	BRASS	SHELL	9
			1	RED	SILICONE	GASKET	8
			1	NICKEL 100u"/COPPER	BERYLLIUM COPPER	OUTER CONTACT	7
			1	NICKEL 100u"/COPPER	SK5	SPRING	6
			1	NICKEL 100u"/COPPER	BRASS	WASHER	5
			1	NATURAL	PTFE	INSULATOR	4
			1	NICKEL 100u"/COPPER	BRASS	BODY	3
			1	GOLD 50u"/NICKEL/COPPER	PHOSPHOR BRONZE	CONTACT PIN	2
			1	NICKEL 100u"/COPPER	BRASS	BODY WITH HOUSING	1
			2466243-	1 PLATING	MATERIAL	DESCRIPTION	ITEM
			QUANTITY PER ASSY		PARTS LIST		
THIS DRAWING IS A CO	DNTROLLED DOCUMENT.	DWN ED CHK	03JUL2023 03JUL2023	TE Connectivity			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.3	ED APVD 03JUL2023 WH PRODUCT SPEC		NAME BNC RIGHT ANGLE PLUG,CRIMP,			
$\oplus$			MATCH WITH RG58,RG141 CABLE,4GHz 				
MATERIAL SEE TABLE	ANGLES ± 5" FINISH			A2 00779 <b>G-</b> 24			
		CUSTOM	er drawing		SCALE 8:1	EET 1 OF 1 REV	А

А

В

D

С

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

2466243-1