

AMP | Superseal Pro

TE Internal #: 2-2356607-2

4 Position Housing, Housing for Female Terminals, Wire-to-Wire, 5 mm [.197 in] Centerline, Sealable, Gray, Wire & Cable, Power,

Superseal Pro

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings











Number of Positions: 4

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.2 mm [.047 in]

Connector System: Wire-to-Wire

Centerline (Pitch): 5 mm [.197 in]

Features

Product Type Features

Product Type Features	
Connector Shape	Rectangular
Mixed & Hybrid Connector	No
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	4
Number of Rows	2
Electrical Characteristics	
Operating Voltage	12 VDC

12 V

Nominal Voltage Architecture



Cable Exit Angle	180°
Primary Product Color	Gray
Connector & Keying Code	В
Contact Features	

Contact Size	1.2mm
Contact Type	Receptacle
Mating Tab Width	1.2 mm[.047 in]
Contact Current Rating (Max)	7.5 A

Mechanical Attachment

Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	5 mm[.197 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]

Operation/Application

Circuit Application	Power
Other	
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC



Halogen Content	Not Low Halogen - contains Br or Cl > 900
	ppm.

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts






Also in the Series | Superseal Pro









Customers Also Bought






TE Part #CAT-AM71-CH8172
AMP SUPERSEAL 1.5MM,
CONNECTOR HOUSING





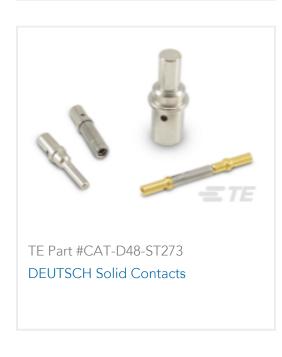





Documents

Product Drawings

4POS,MCON 1.2,REC HSG ASSY,SLD,COD B

English

4POS,MCON 1.2,REC HSG ASSY,SLD,COD B

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2356607-2_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2356607-2_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2356607-2_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

2-2356607-2