
	THIS DRAWING IS UNPUBLISHE		RELEASED FOR PUBLIC	7 ation 20			6
	C COPYRIGHT 20 PART NUMBER		RMINATOR	FEED TYPE	DES	SCRIPTION	
	1239057-1 7-1239057-1 7-1239057-7		& LEADMAKER & LEADMAKER -	MECH POST FE MECH POST FE -	ED - I AND	APPLICATOR SPARE PARTS E PARTS KIT	
D	WIRE 2.80 [E: RECEPTA IZE	TYPE F F - - -				
	TERMINALS A	PPLIED		and the second second			
	42 85	-		-	-		
	-	-		-	-		
	-	-		-	-		
	WIRE 🍘 🖡 🖬 🕄	CRIMP HEIGHT		PIN F LENGTH			
С	3.00mm ² 2.00mm ²		$\begin{array}{c} 0.5 & [.071 \pm .002] \\ 0.5 & [.067 \pm .002] \end{array}$		78-9 [.294] · 78-6 [.298] ·		
	I. 40mm ²		$05 [.060 \pm .002]$ $05 [.056 \pm .002]$		79-0 [.304] · 79-0 [.309] ·		$ \begin{array}{c} $
	-		-				
	-		-				
			-				
	-		-				
	_		-				
	🛆 RECOMME	ENDED SPA	re parts				
	~			LOWER AND F E LUBRICATI($(2\cdot9)$ $(2\cdot7)$
В				EET FOR MOR			
			PER THE	APPLICATOR TOR.	INSTRUCT	ION SHEET	
							UOL
		B R C		80°			
	POST-FEED 40			30mm STROKE			
А		(47)		47)			
	00	(49)	00	49			
		-					
	I I I I I I I I I I I I I I I I I I I		- Loo				
	AMP 4805 REV 31MAR2000						

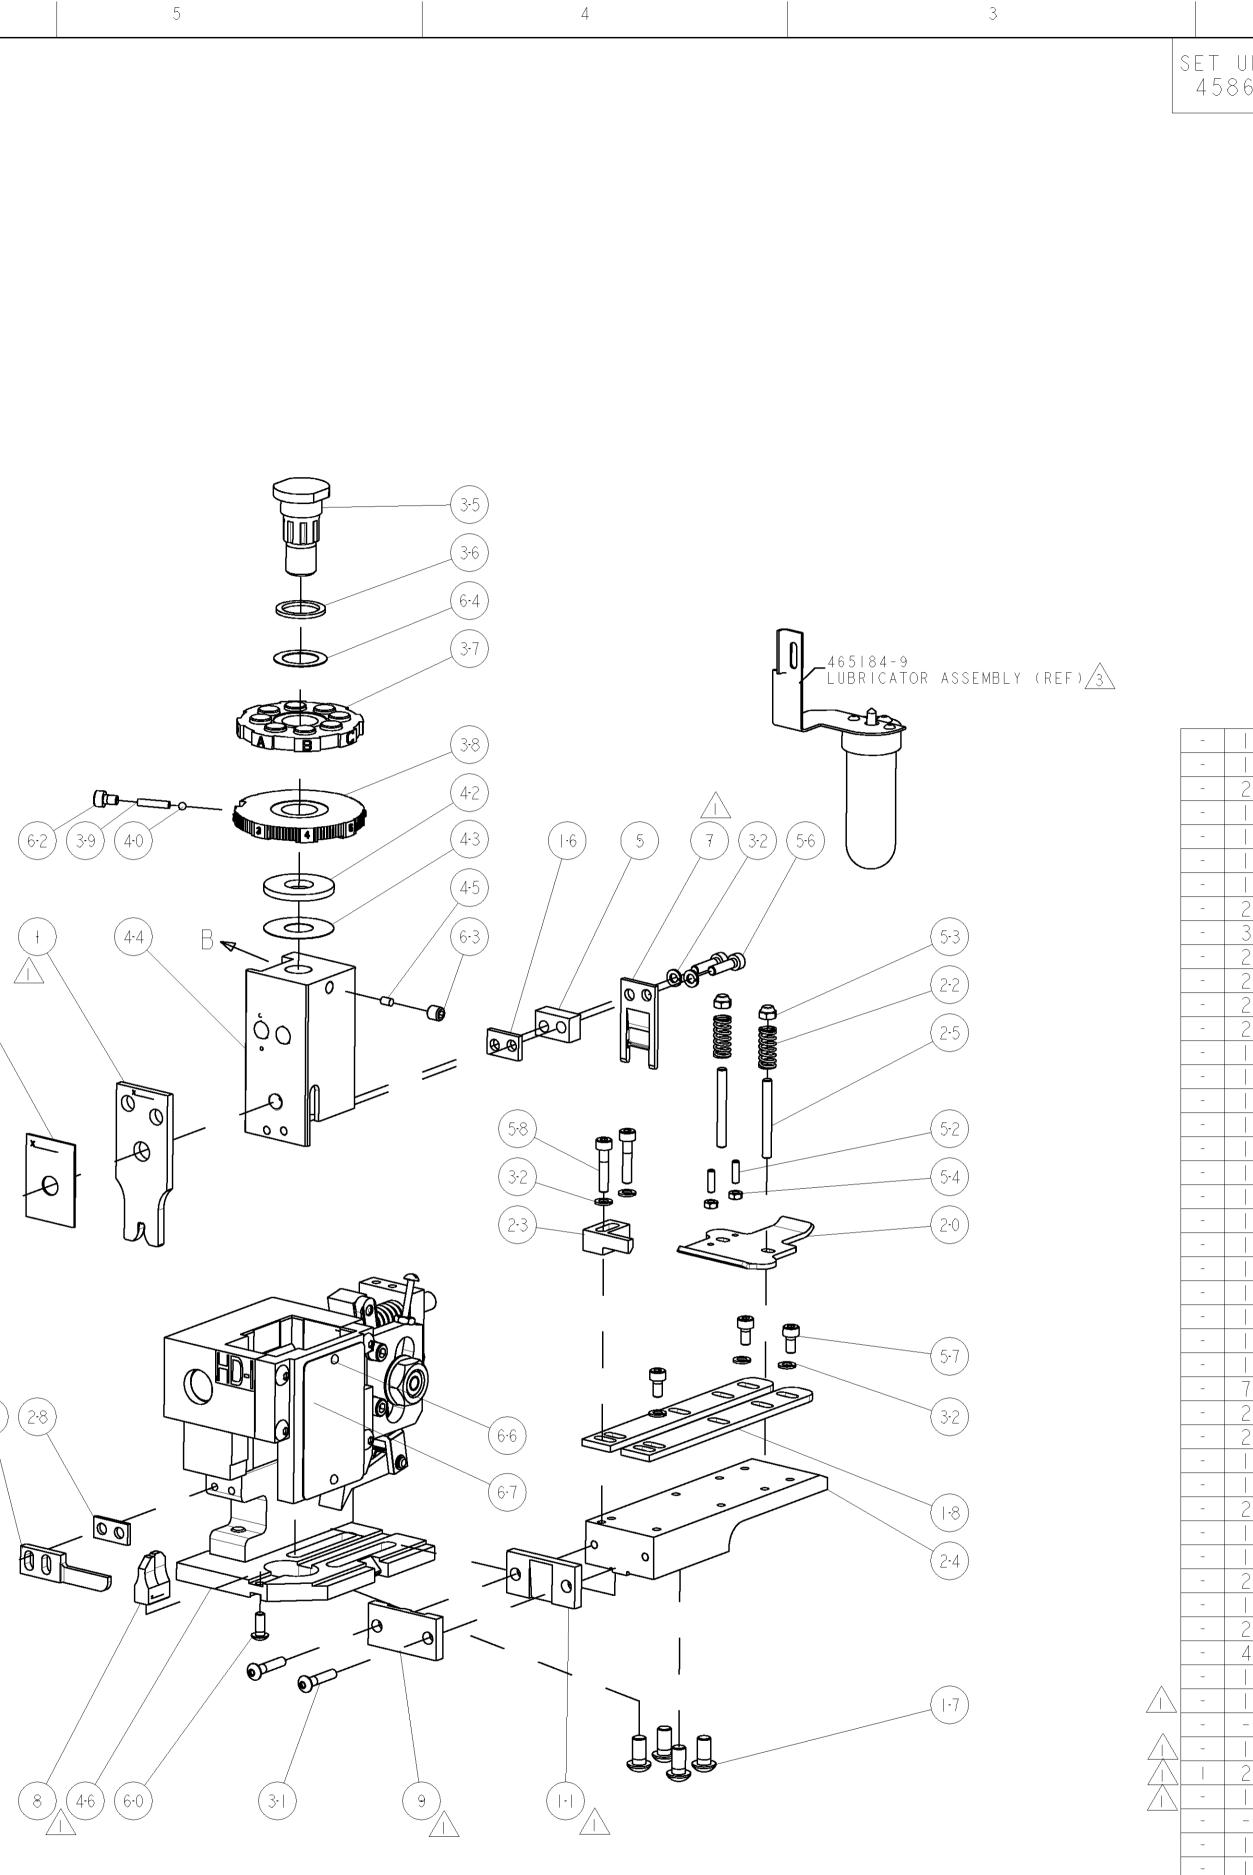

ATERIAL --

<u> </u>			705-2 264-1	DOCUMENTATION PACKAGE PLATE, IDENTIFICATION	67		
2	2		17-2	SCREW, DRIVE	66		
		9869	950-1	WASHER, FLAT PRECISION	64		
			031-0	SCR, SET, CUP POINT M6 X 6.0	63		
			<u>23-9</u> 24-7	SCR, SKT HD CAP M4 X 6.0 SCR, BTN SKT HD CAP (M4 X 10.0)	62		
2	2		023-4	SCR, SKT HD CAP M4 X 20.0	58	С	
3	3		023-0	SCR, SKT HD CAP M4 X 8.0	57		
2	2		023-3	SCR, SKT HD CAP M4 X 16.0	56		
2	2		29-1)65-1	NUT, HEX, REG M3 NUT, LOCK, HEX, TORQUE (M4)	54		
2	2		032-2	SCR, SET, FLT POINT M3 X IO.O			
		180	24-3	SCR, BTN SKT HD CAP (M3 X I0.0)	52 49		
			676-1	CAM, UNIVERSAL POST-FEED	47		
			<u>662- </u> 9 -	SUB ASSY, APPLICATOR FRAME Plug,nylon	46		
			998-1	RAM	44		
		690	25-1	SHIM SUB-ASSY	43		
			24-1	WASHER, RAM (.115)	42		
			024-6 4 -	SCR, BTN SKT HD CAP (M8 X 25.0) Ball, Steel	4		
			278-7	SPRING, COMPRESSION	39		
		1320	922-1	DISC, ADJUST, INSULATION CRIMP	38		
			777-1	WIRE DISC, ASSEMBLY	37		
		1 22480-5 1 690212-1 7 18025-2		SPRING, COMPRESSION POST, RAM	36		
7	7			WASHER, SPRG LOCK, REG M4 3			
2	2		024-0	SCR, BTN SKT HD CAP (M4 X 20.0) 3			
2	2		24-8	SCR, BTN SKT HD CAP (M4 X 12.0)	29	В	
) 45 - 2) 39 -	SPACER, STRIPPER STRIPPER (MACHINING)	28		
2	2		906-1	STUD, THREADED	25		
			995-1	PLATE, STRIP GUIDE	24		
<u> </u>			325-2	PLATE, STRIP HOLD DOWN	23		
2	2		<u>281-1</u> 665-1	SPRING, DRAG DRAG	22		
2	2		663-6	GUIDE, LOWER STRIP	18		
4				SCR, BTN SKT HD CAP (M6 X 12.0)	7		
				SPACER, SLUG BLADE	6		
		2400	- 44-1	PLATE, REAR SHEAR -			
		6904	182-5	PLATE, FRONT SHEAR	9		
2			3383-7	ANVIL, COMBINATION	8		
		6904	174-5	BLADE, SLUG	7		
		2-240	-)64 -7	SPACER	5		
)09-1	BLOCK, FL CRIMPER SPACER	4		
2			5 34-4	CRIMPER, INSULATION F PREMIUM	3		
))			388-7	SPACER, CRIMPER	2		
2			5408-9 T NO	CRIMPER, WIRE PREMIUM	ITEM	Δ.	
- 7	FOR TICO FIE		TNO	DESCRIPTION	NO	A	
THE CONT TED FOR	ROLLING ENGINE THE LATEST REV	TRONICS CORPORATION TRING ORGANIZATION VISION.	R.O.WILS				
	TOLERAN OTHERWIS	ICES UNLESS E SPECIFIED:	R.O.WILS	ON			
		±- ±0.1	T.L.ELB PRODUCT SPEC	END FEED HDI APPLICATOR			
23	PLC : PLC :	±0.0 ±0.00	- APPLICATION				
AN	PLC : GLES NISH	±0.000 ±-	- WEIGHT	- A 00779 C - 1239057	TRICTED TO		
		-	CUSTOMER		rev B		
				3:5		1	

		2						
UP GAGE 3638-3	LOC Д	^{різт} 66	P LTR		REVISIONS	DATE DWN APVD		
3638-3				В	ECR-09-000940	15JAN2009	RK	GB

D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: <u>1239057-1</u>