


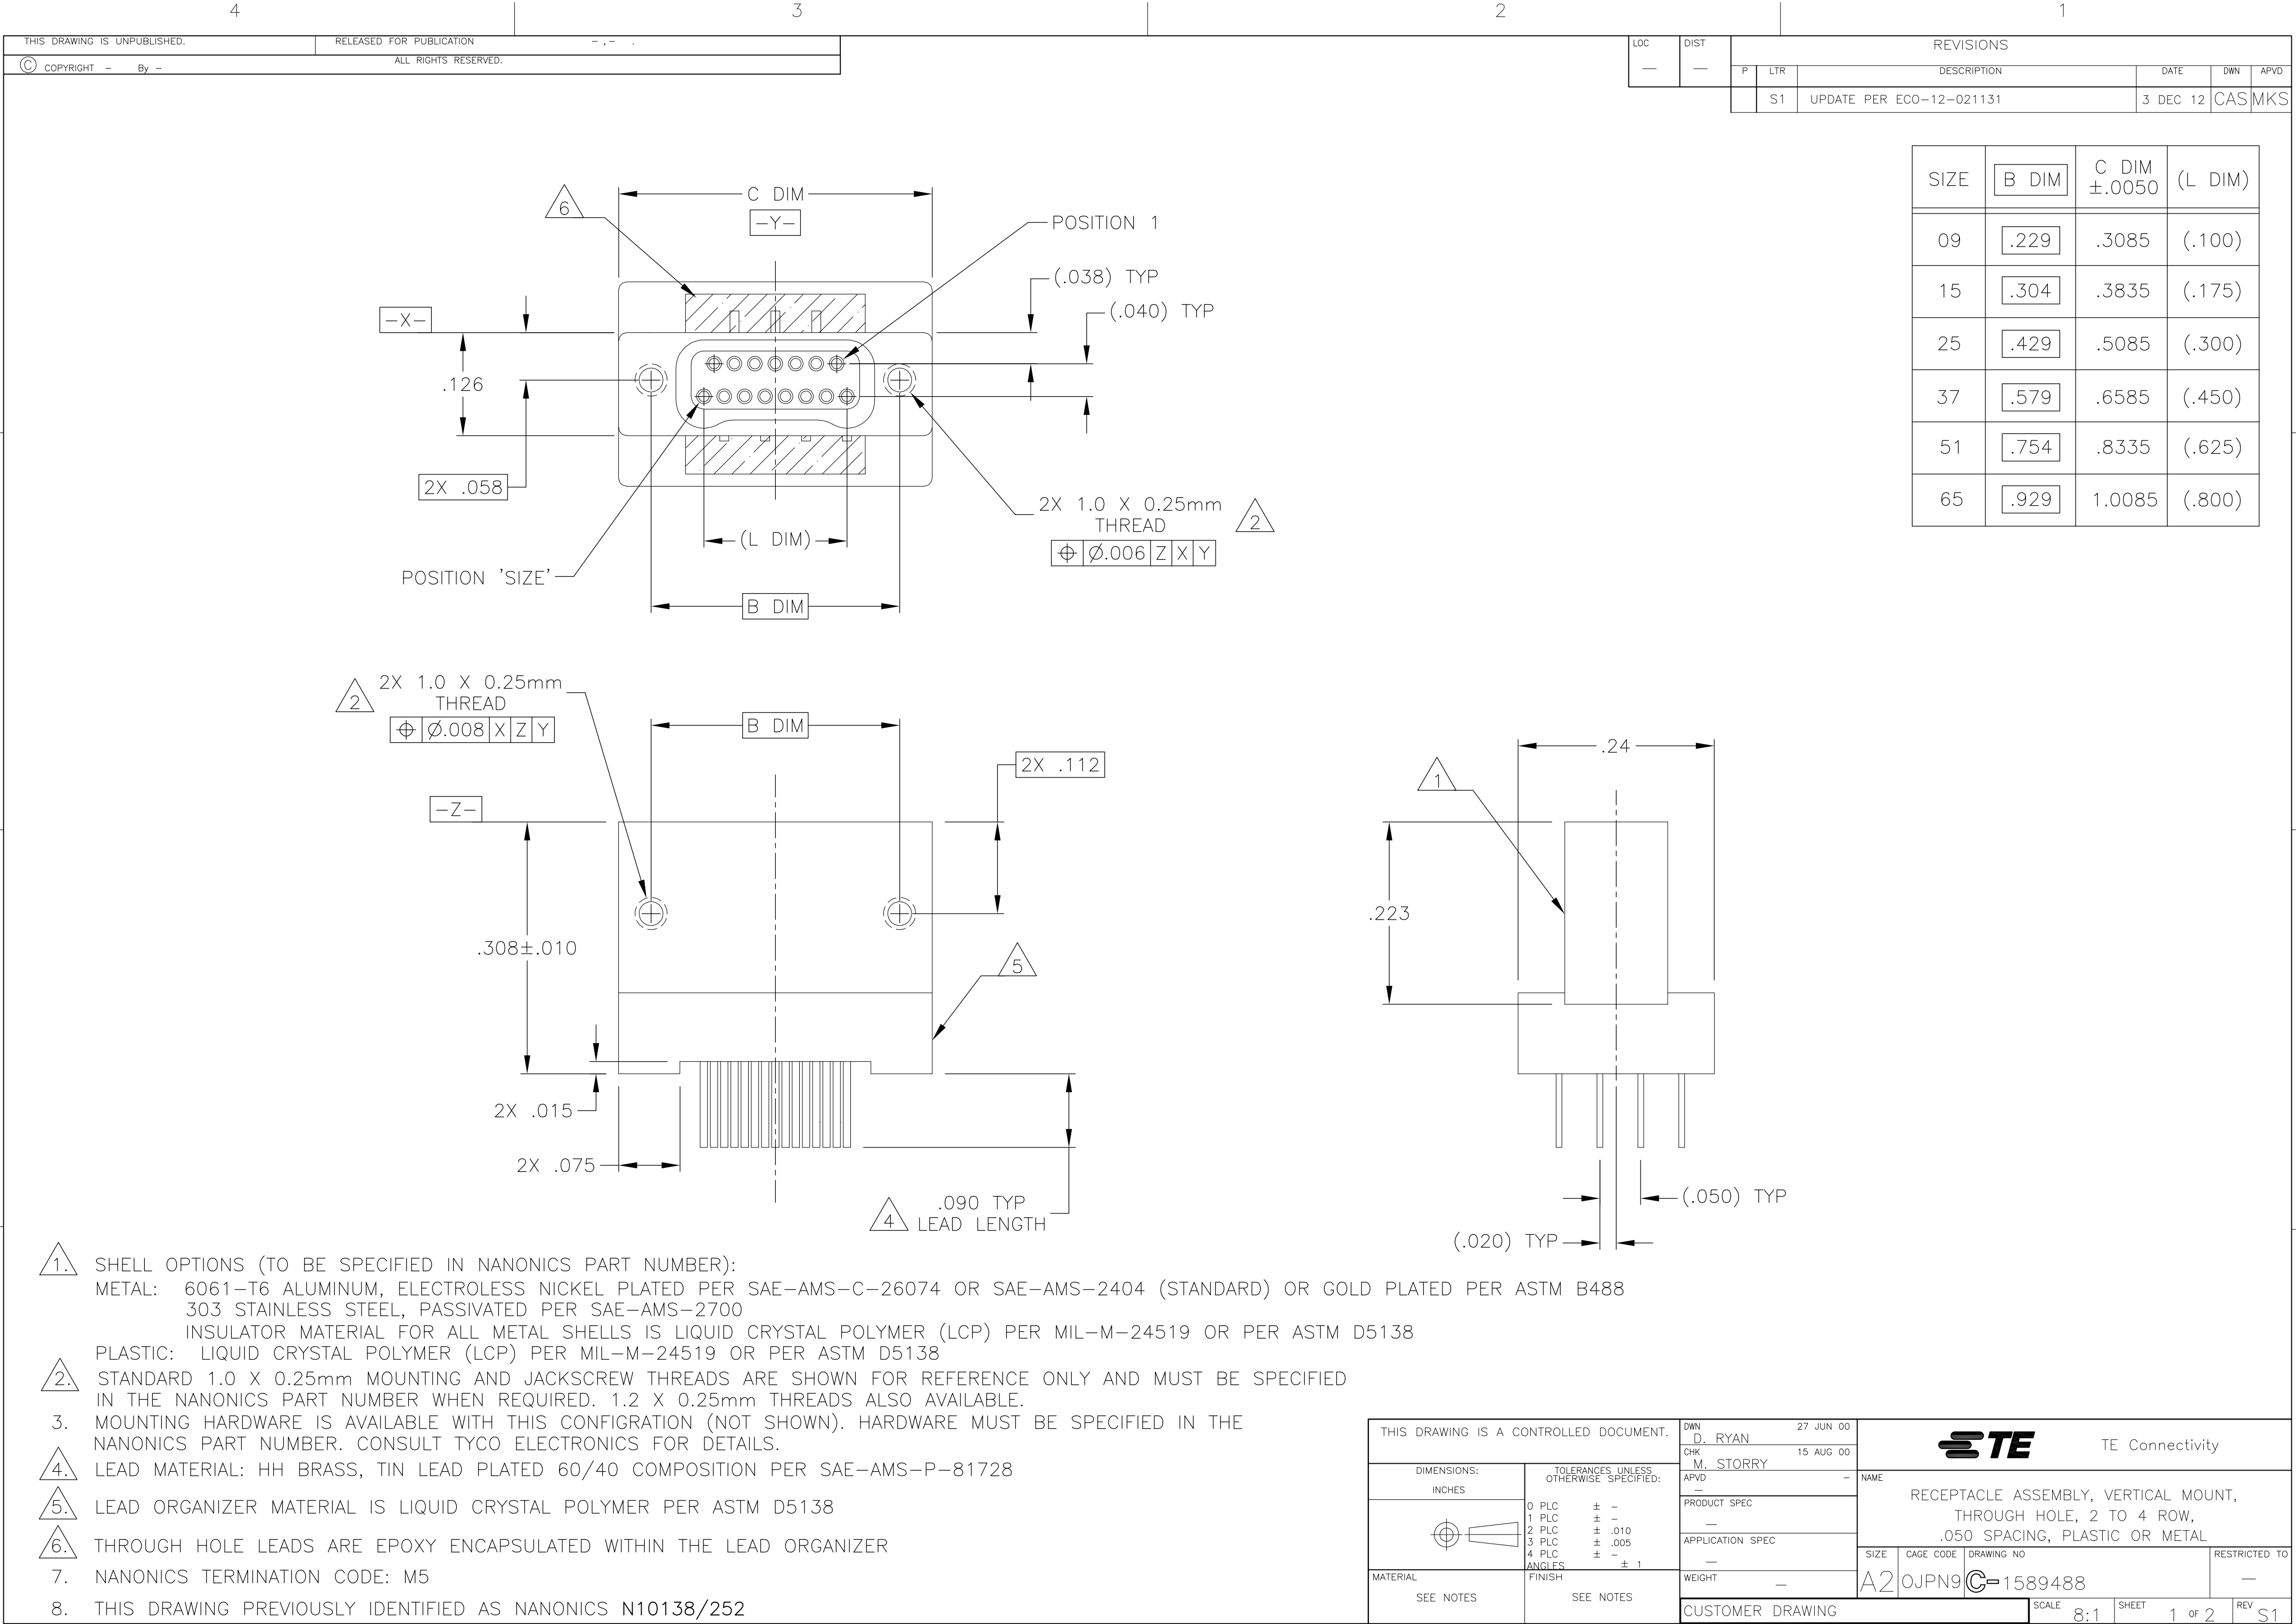


D


C

B


A

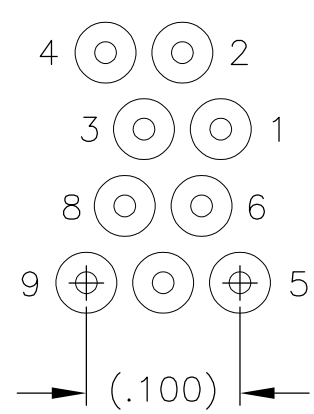


9 POSITION

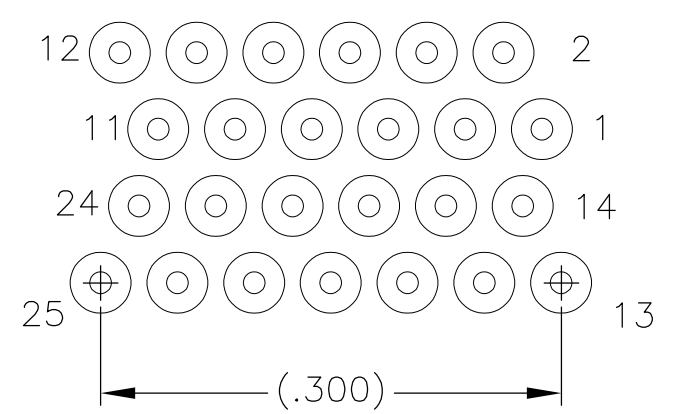


25 POSITION

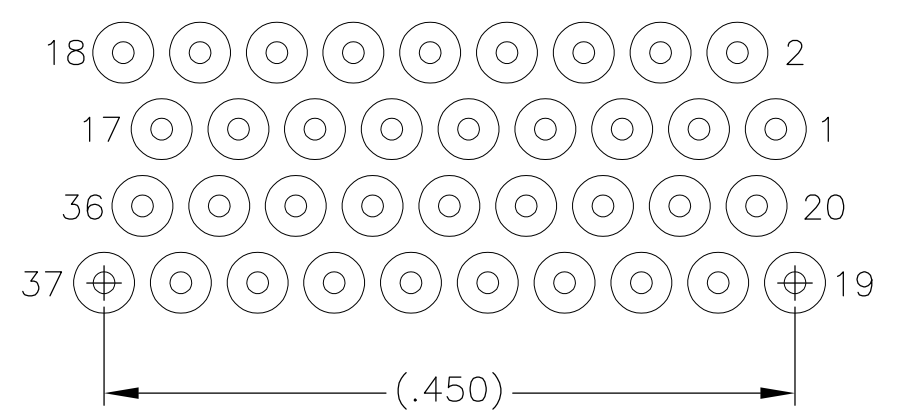


37 POSITION

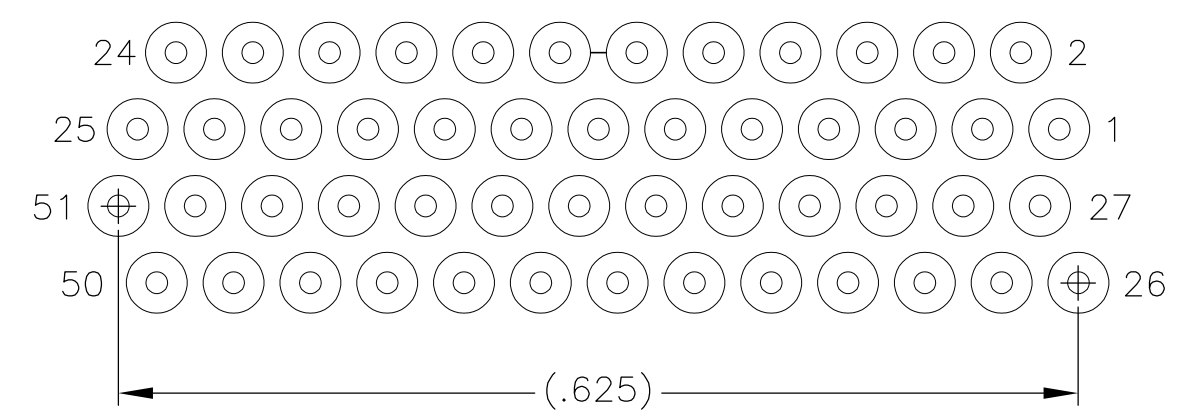


51 POSITION

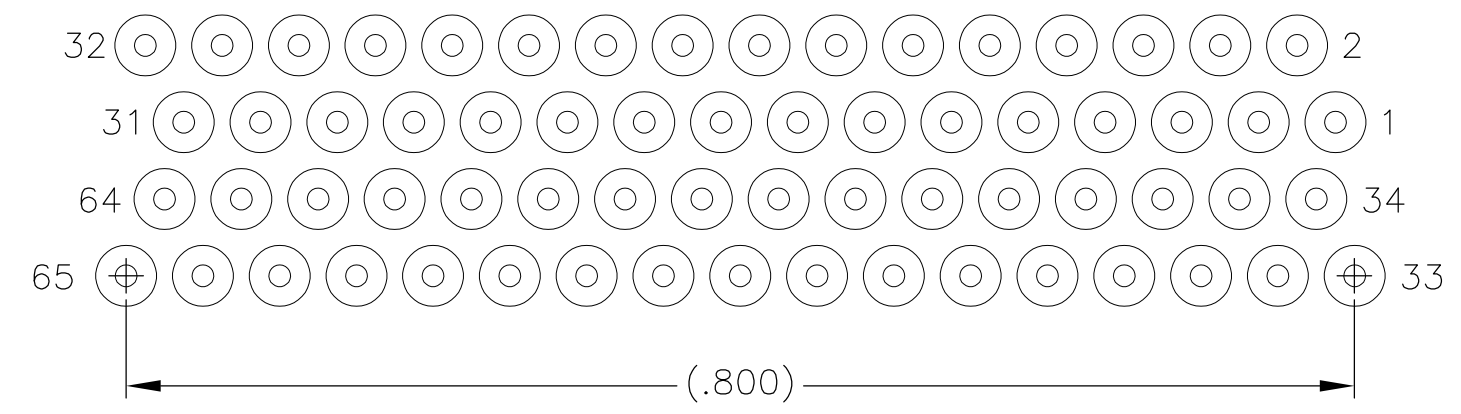

65 POSITION

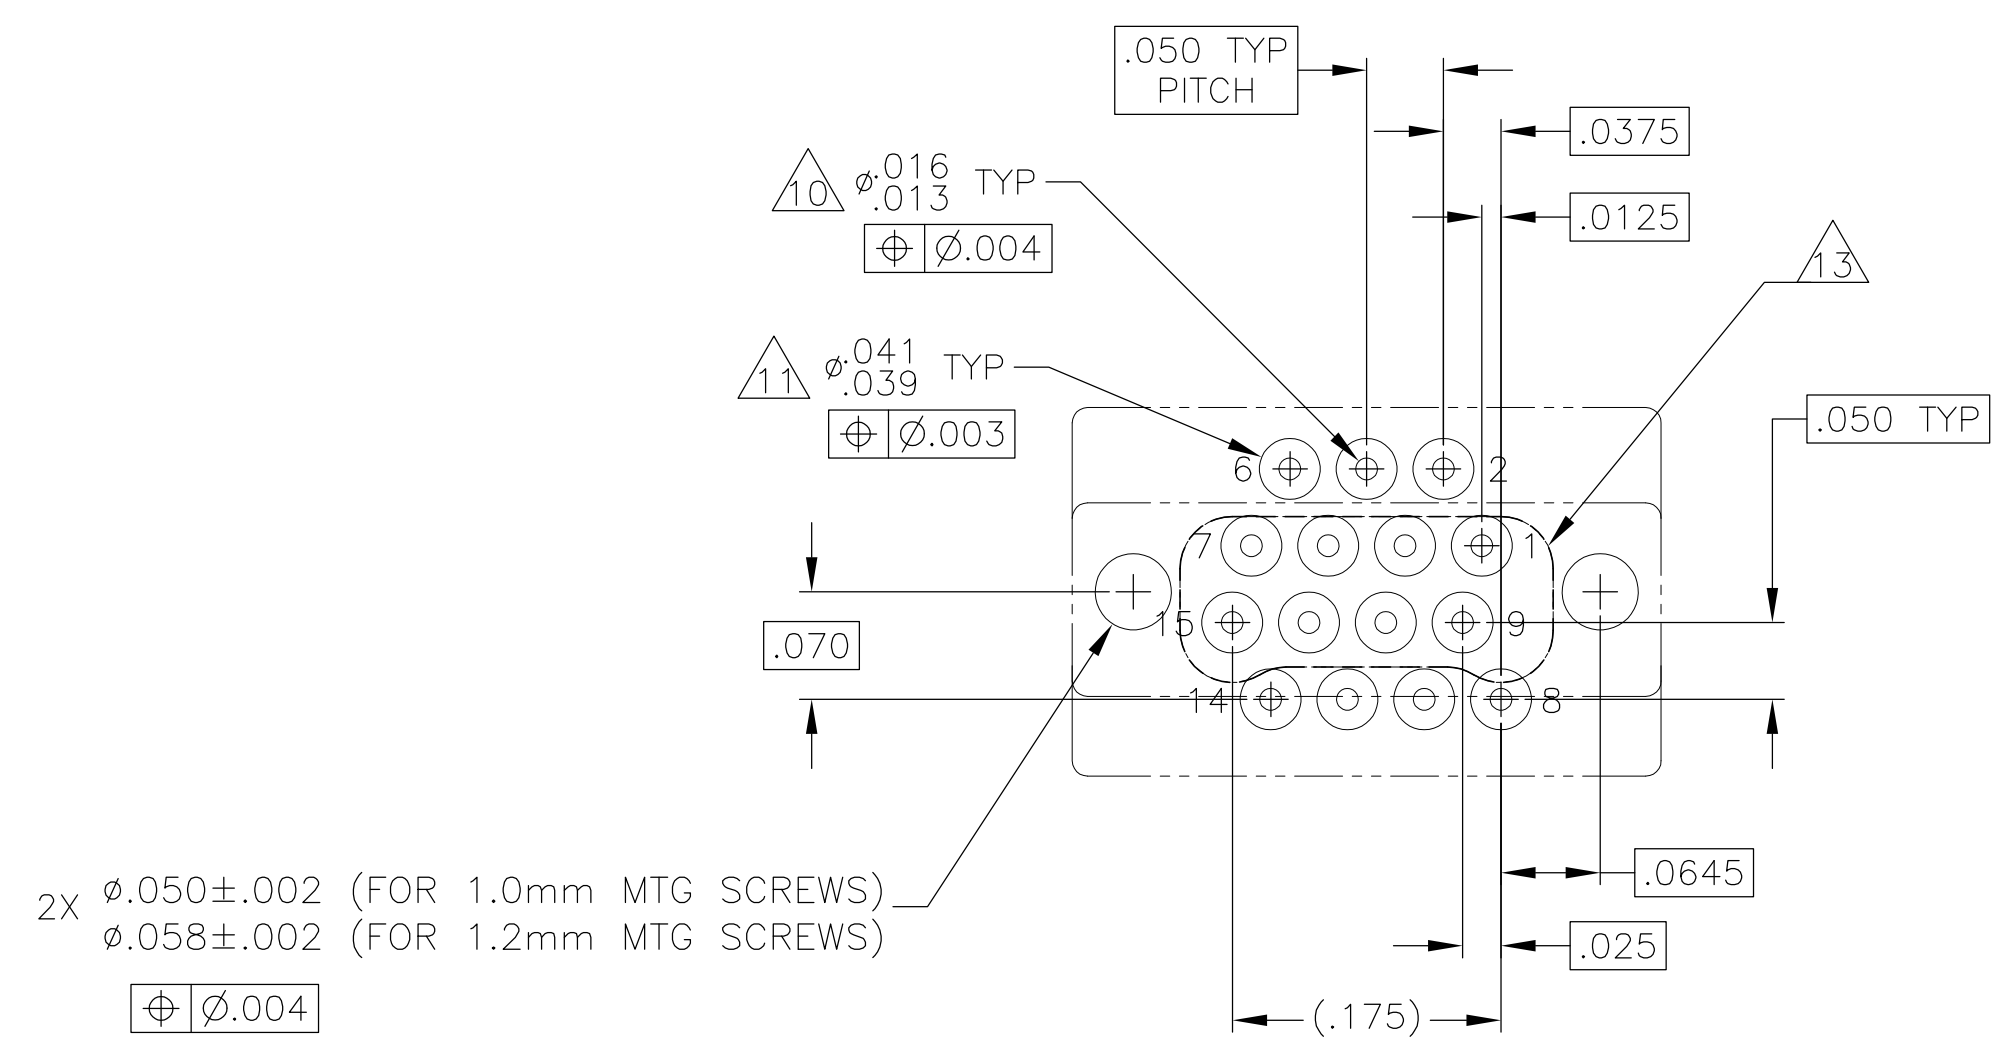

TYPICAL PCB LAYOUT
SIZE 15 SHOWN FOR REFERENCE 9

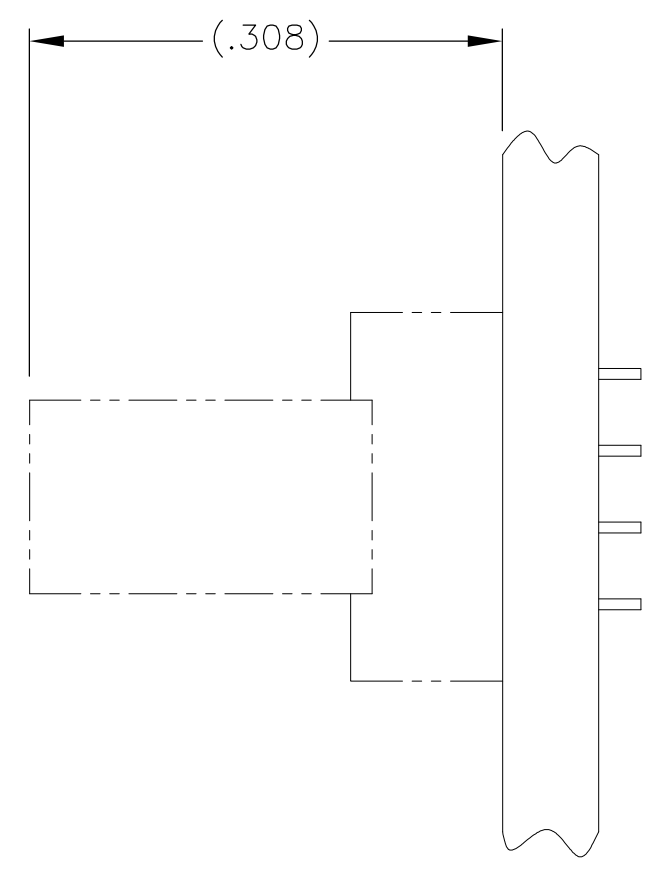

9.
- POSITIONAL TOLERANCES FOR BASIC DIMENSIONED FEATURES ARE RELATIVE TO FIDUCIALS OR SOME SIMILAR DATUM REFERENCES DEFINED BY PCB DESIGNER.
10.
- PLATED THROUGH HOLES
11.
- SOLDER PADS
12. ALL THROUGH HOLE LAYOUTS ARE AS VIEWED FROM TOP OF PCB.
13.
- CONNECTOR ORIENTATION

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. RYAN
27 JUN 00

CHK
M. STORRY
15 AUG 00

APVD
—

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

CUSTOMER DRAWING

TE Connectivity

RECEPTACLE ASSEMBLY, VERTICAL MOUNT,
THROUGH HOLE, 2 TO 4 ROW,
.050 SPACING, PLASTIC OR METAL

SIZE
A2

CAGE CODE
0JPN9

DRAWING NO
C=1589488

RESTRICTED TO
—

SCALE
8:1

SHEET
2 of 2

REV
S1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[STM009M5PQ](#)