


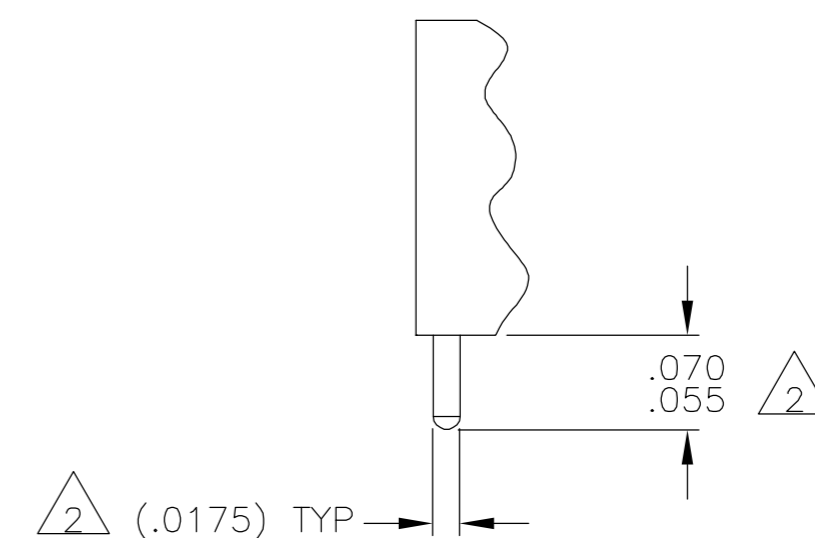
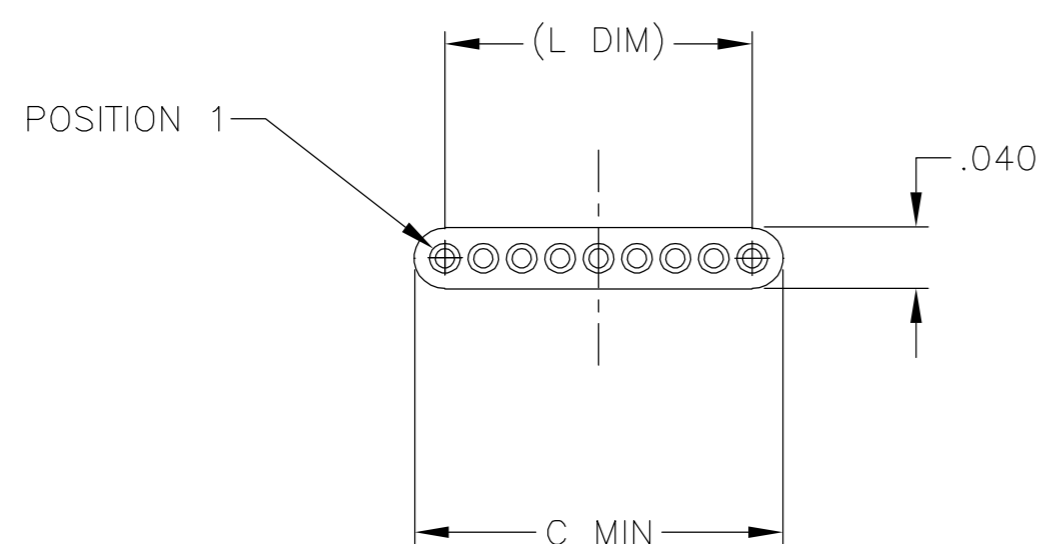








SIZE	C DIM	(L DIM)
04	.115	(.075)
09	.240	(.200)
15	.390	(.350)

	25	.640	(.600)
	37	.940	(.900)
	51	1.290	(1.250)





DETAIL A  
POSITION "T" SHOWN FOR  
REFERENCE



- |   |   |   |
|---|---|---|
| T |  | POSITION 1                              |
| U |  | POSITION 2                              |
| V |  | POSITION 3                              |
| W |  | POSITION 1, AND SECOND TO LAST POSITION |
| Y |  | POSITION 1, AND THIRD TO LAST POSITION  |
| Z |  | POSITION 2, AND THIRD TO LAST POSITION  |

- 2 POLARIZING GUIDE POST "PGP" POSITIONS, SEE DETAIL A

- 1 INSULATOR MATERIAL: LCP (LIQUID CRYSTAL POLYMER) PER ASTM D5138
- 2 OPTIONAL POLARIZATION GUIDE POST SHOWN FOR REFERENCE ONLY. IF GUIDE POST(S) ARE REQUIRED, THE LOCATION MUST BE SPECIFIED IN THE NANONICS PART NUMBER. GUIDE POST MATERIAL IS 303 STAINLESS STEEL, PASSIVATED PER SAE-AMS-QQ-P-35.
- 3 LEAD MATERIAL: HH BRASS, TIN LEAD PLATED 60/40 COMPOSITION PER SAE-AMS-P-81728
- 4 WHEN ORDERING THESE SIZES, FIRST CONSULT TYCO ELECTRONICS/NANONICS FOR ADDITIONAL INFORMATION.
- 5 THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS N10138/070

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C SCHOLL 3 MAR 05		 Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		CHK M STORY 3 MAR 04		APVD —	
		PRODUCT SPEC —		PLUG ASSEMBLY, UNSHROUDED STRIP, STRAIGHT LEADS, PLASTIC	
		APPLICATION SPEC —		SIZE A2	
		—		CAGE CODE 00779	
MATERIAL SEE NOTES		FINISH SEE NOTES		DRAWING NO C-1589904	
		WEIGHT —		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 8:1 SHEET 1 OF 1 REV B	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[USS009B5](#)