


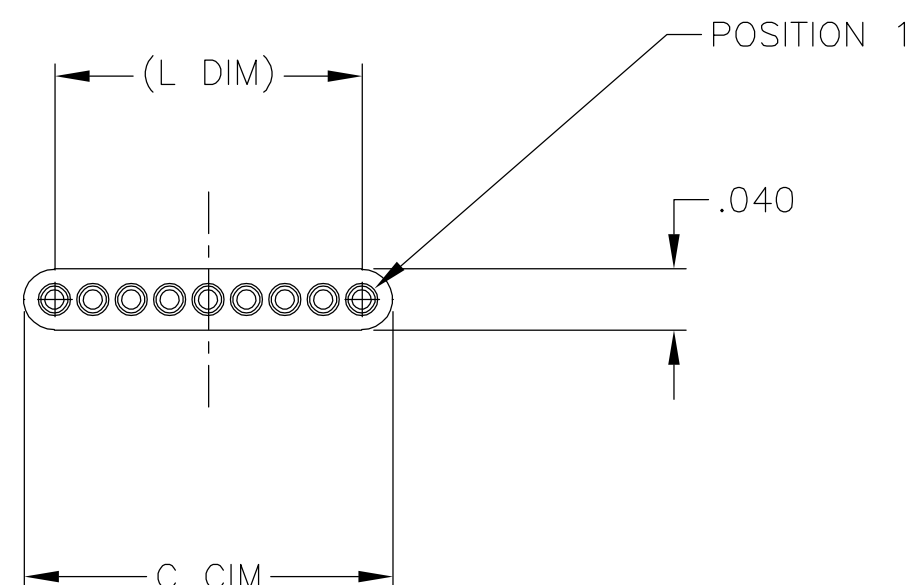








DETAIL A
POSITION "T" SHOWN FOR
REFERENCE

SIZE	C DIM	(L DIM)
04	.115	(.075)
09	.240	(.200)
15	.390	(.350)



	25	.640	(.600)
	37	.940	(.900)
	51	1.290	(1.250)



- T  POSITION 1
- U  POSITION 2
- V  POSITION 3
- W  POSITION 1, AND SECOND TO LAST POSITION
- Y  POSITION 1, AND THIRD TO LAST POSITION
- Z  POSITION 2, AND THIRD TO LAST POSITION

 POLARIZING POSITIONS, SEE DETAIL A

- 1 INSULATOR MATERIAL: LCP (LIQUID CRYSTAL POLYMER) PER ASTM D5138
- 2 OPTIONAL POLARIZATION POSITION SHOWN FOR REFERENCE ONLY. IF POLARIZATION GUIDE POST(S) ARE REQUIRED ON THE MATING PLUG, THE CORRESPONDING LOCATION MUST BE SPECIFIED IN THE NANONICS PART NUMBER. THE CONTACT CAVITY IS LEFT EMPTY FOR ACCEPTANCE OF THE PLUG GUIDE POST.
- 3 LEAD MATERIAL: HH BRASS, TIN LEAD PLATED 60/40 COMPOSITION PER SAE-AMS-P-81728
- 4 WHEN ORDERING THESE SIZES, FIRST CONSULT TYCO ELECTRONICS/NANONICS FOR ADDITIONAL INFORMATION.
- 5 THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS N10138/072

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C SCHOLL 3 MAR 05		 Tyco Electronics Corporation Harrisburg, PA 17105			
		CHK M STORY 3 MAR 05					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, UNSHROUDED STRIP, STRAIGHT LEADS, PLASTIC			
		0 PLC ± — 1 PLC ± — 2 PLC ± .010 3 PLC ± .005 4 PLC ± — ANGLES ± 1°					
MATERIAL		FINISH				SIZE	CAGE CODE
SEE NOTES		SEE NOTES				DRAWING NO	
		WEIGHT —		A2 00779 C-1589905			
CUSTOMER DRAWING				SCALE 8:1	SHEET 1 OF 1		
				REV A	RESTRICTED TO —		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[USS009L5](#)