


DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE
PROJECTION



NOTES

1. FOR USE ON MINIATURE APPLICATORS (LEFT-RIGHT FEED)
AND STANDARD APPLICATORS (RIGHT-LEFT FEED).


2. REELED WITH PAPER AND PAPER COVER.

3. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

GENERAL TOLERANCES ± 0.3

OBSOLETE 3	1	PRE-TINPLATED	PH.BRONZE	6-160917-8
	2	PRE-TINPLATED	BRASS	6-160917-7
	3	TINPLATED	PH.BRONZE	160917-4
	4	UNPLATED	PH.BRONZE	160917-3
	5	TINPLATED	BRASS	160917-2
	6	UNPLATED	BRASS	160917-1

		NOTES		FINISH		MATERIAL		PARTNUMBER		
-	-		-	-	-	CUSTOMER DRAWING		FOR REFERENCE ONLY WILL NOT BE UPDATED		
						THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION JULY ,19 87  TE Connectivity NAME .250 SRS FASTIN-ON RECEPTACLE.				
E3	REVISED PER ECO-11-005139		RK	HMR	28MAR11					
LTR.	REVISION RECORD		DR.	CHK.	DATE					
DR. : R.V.LOKVEN.		CHK. : A.BIJNEN.		APP. : L.V.SOEST.		DWG.No.			REV.LTR.	SHEET
DATE: 31-07-87		DATE: 10-08-87		DATE: 25-08-887		160917			E3	1 OF 1
A3										

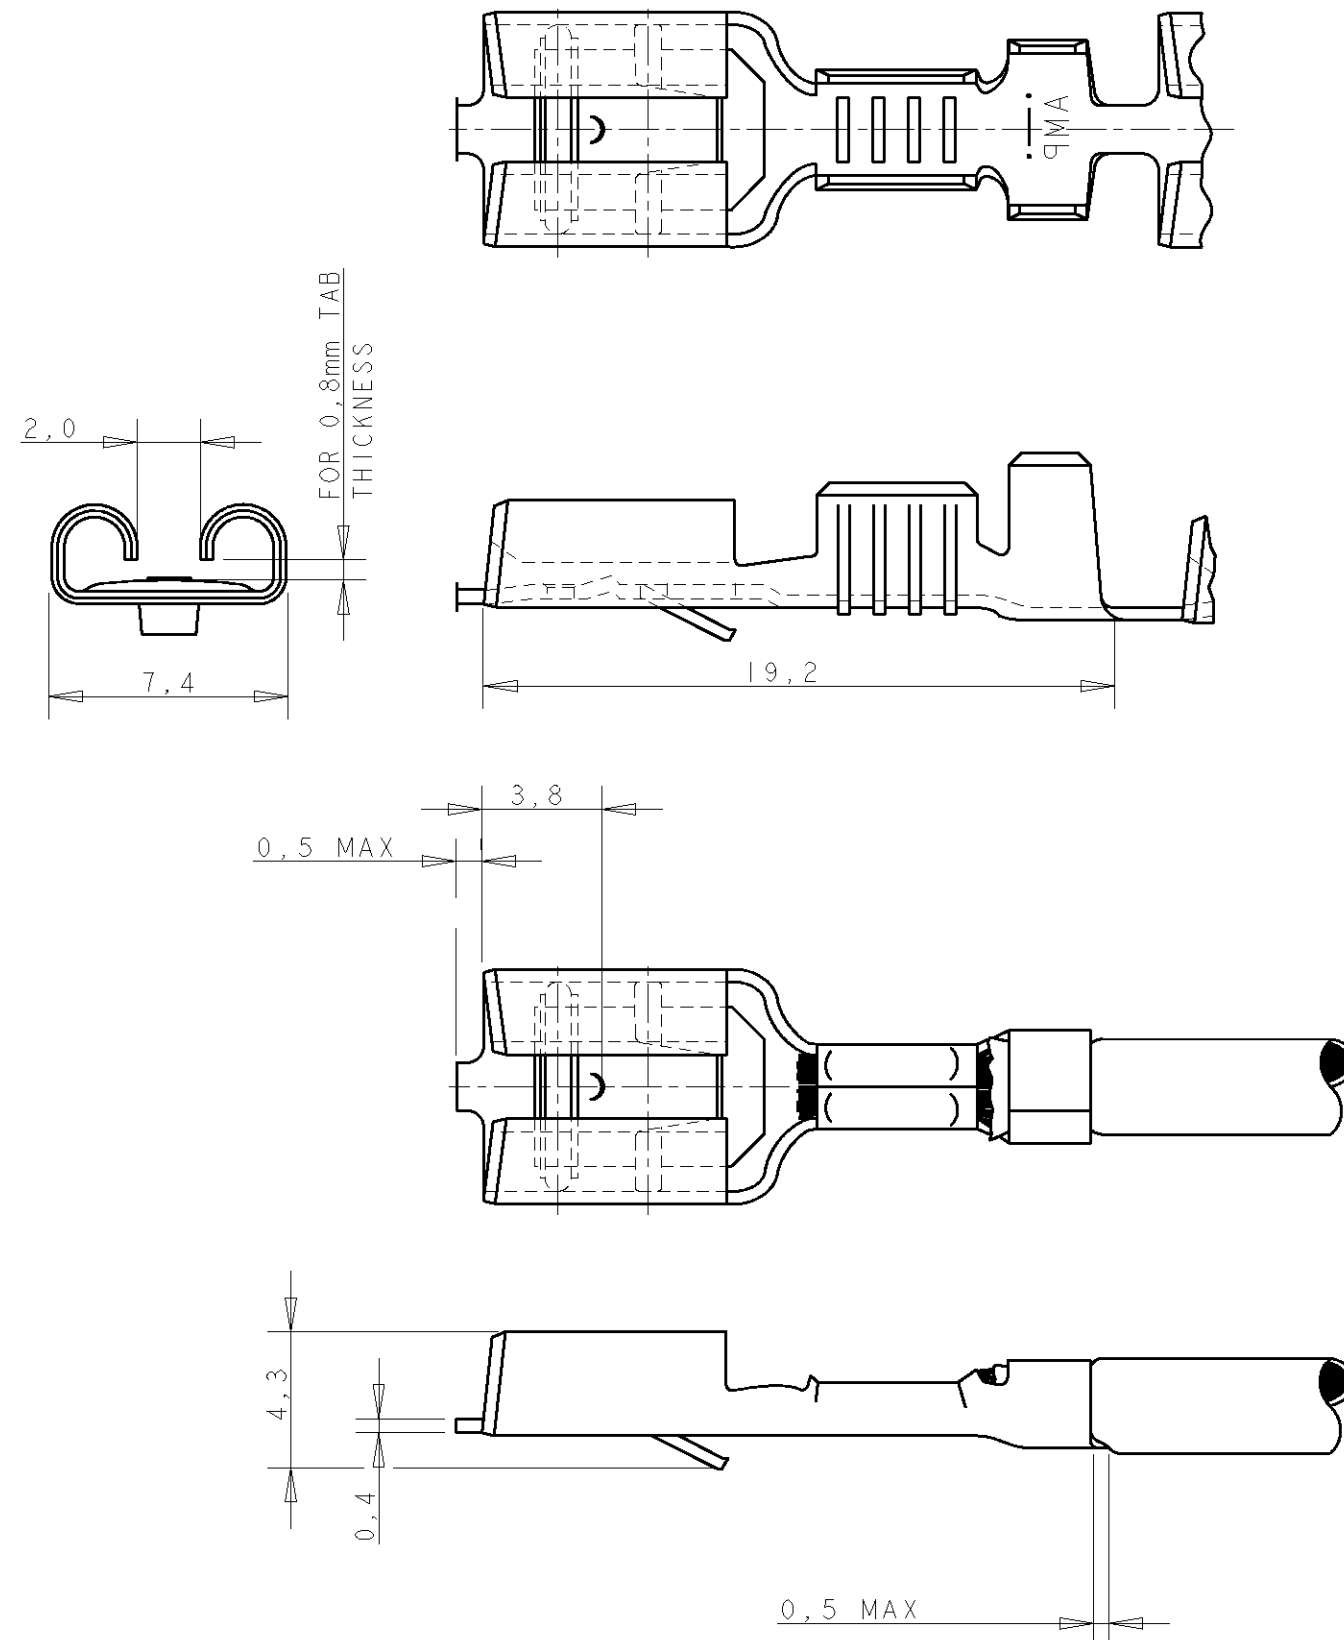

WIRE RANGE :
>1,0-2,5 mm²
INSULATION RANGE :
2,1-3,1 DIA.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[160917-4](#) [160917-4 \(Mouser Reel\)](#)