


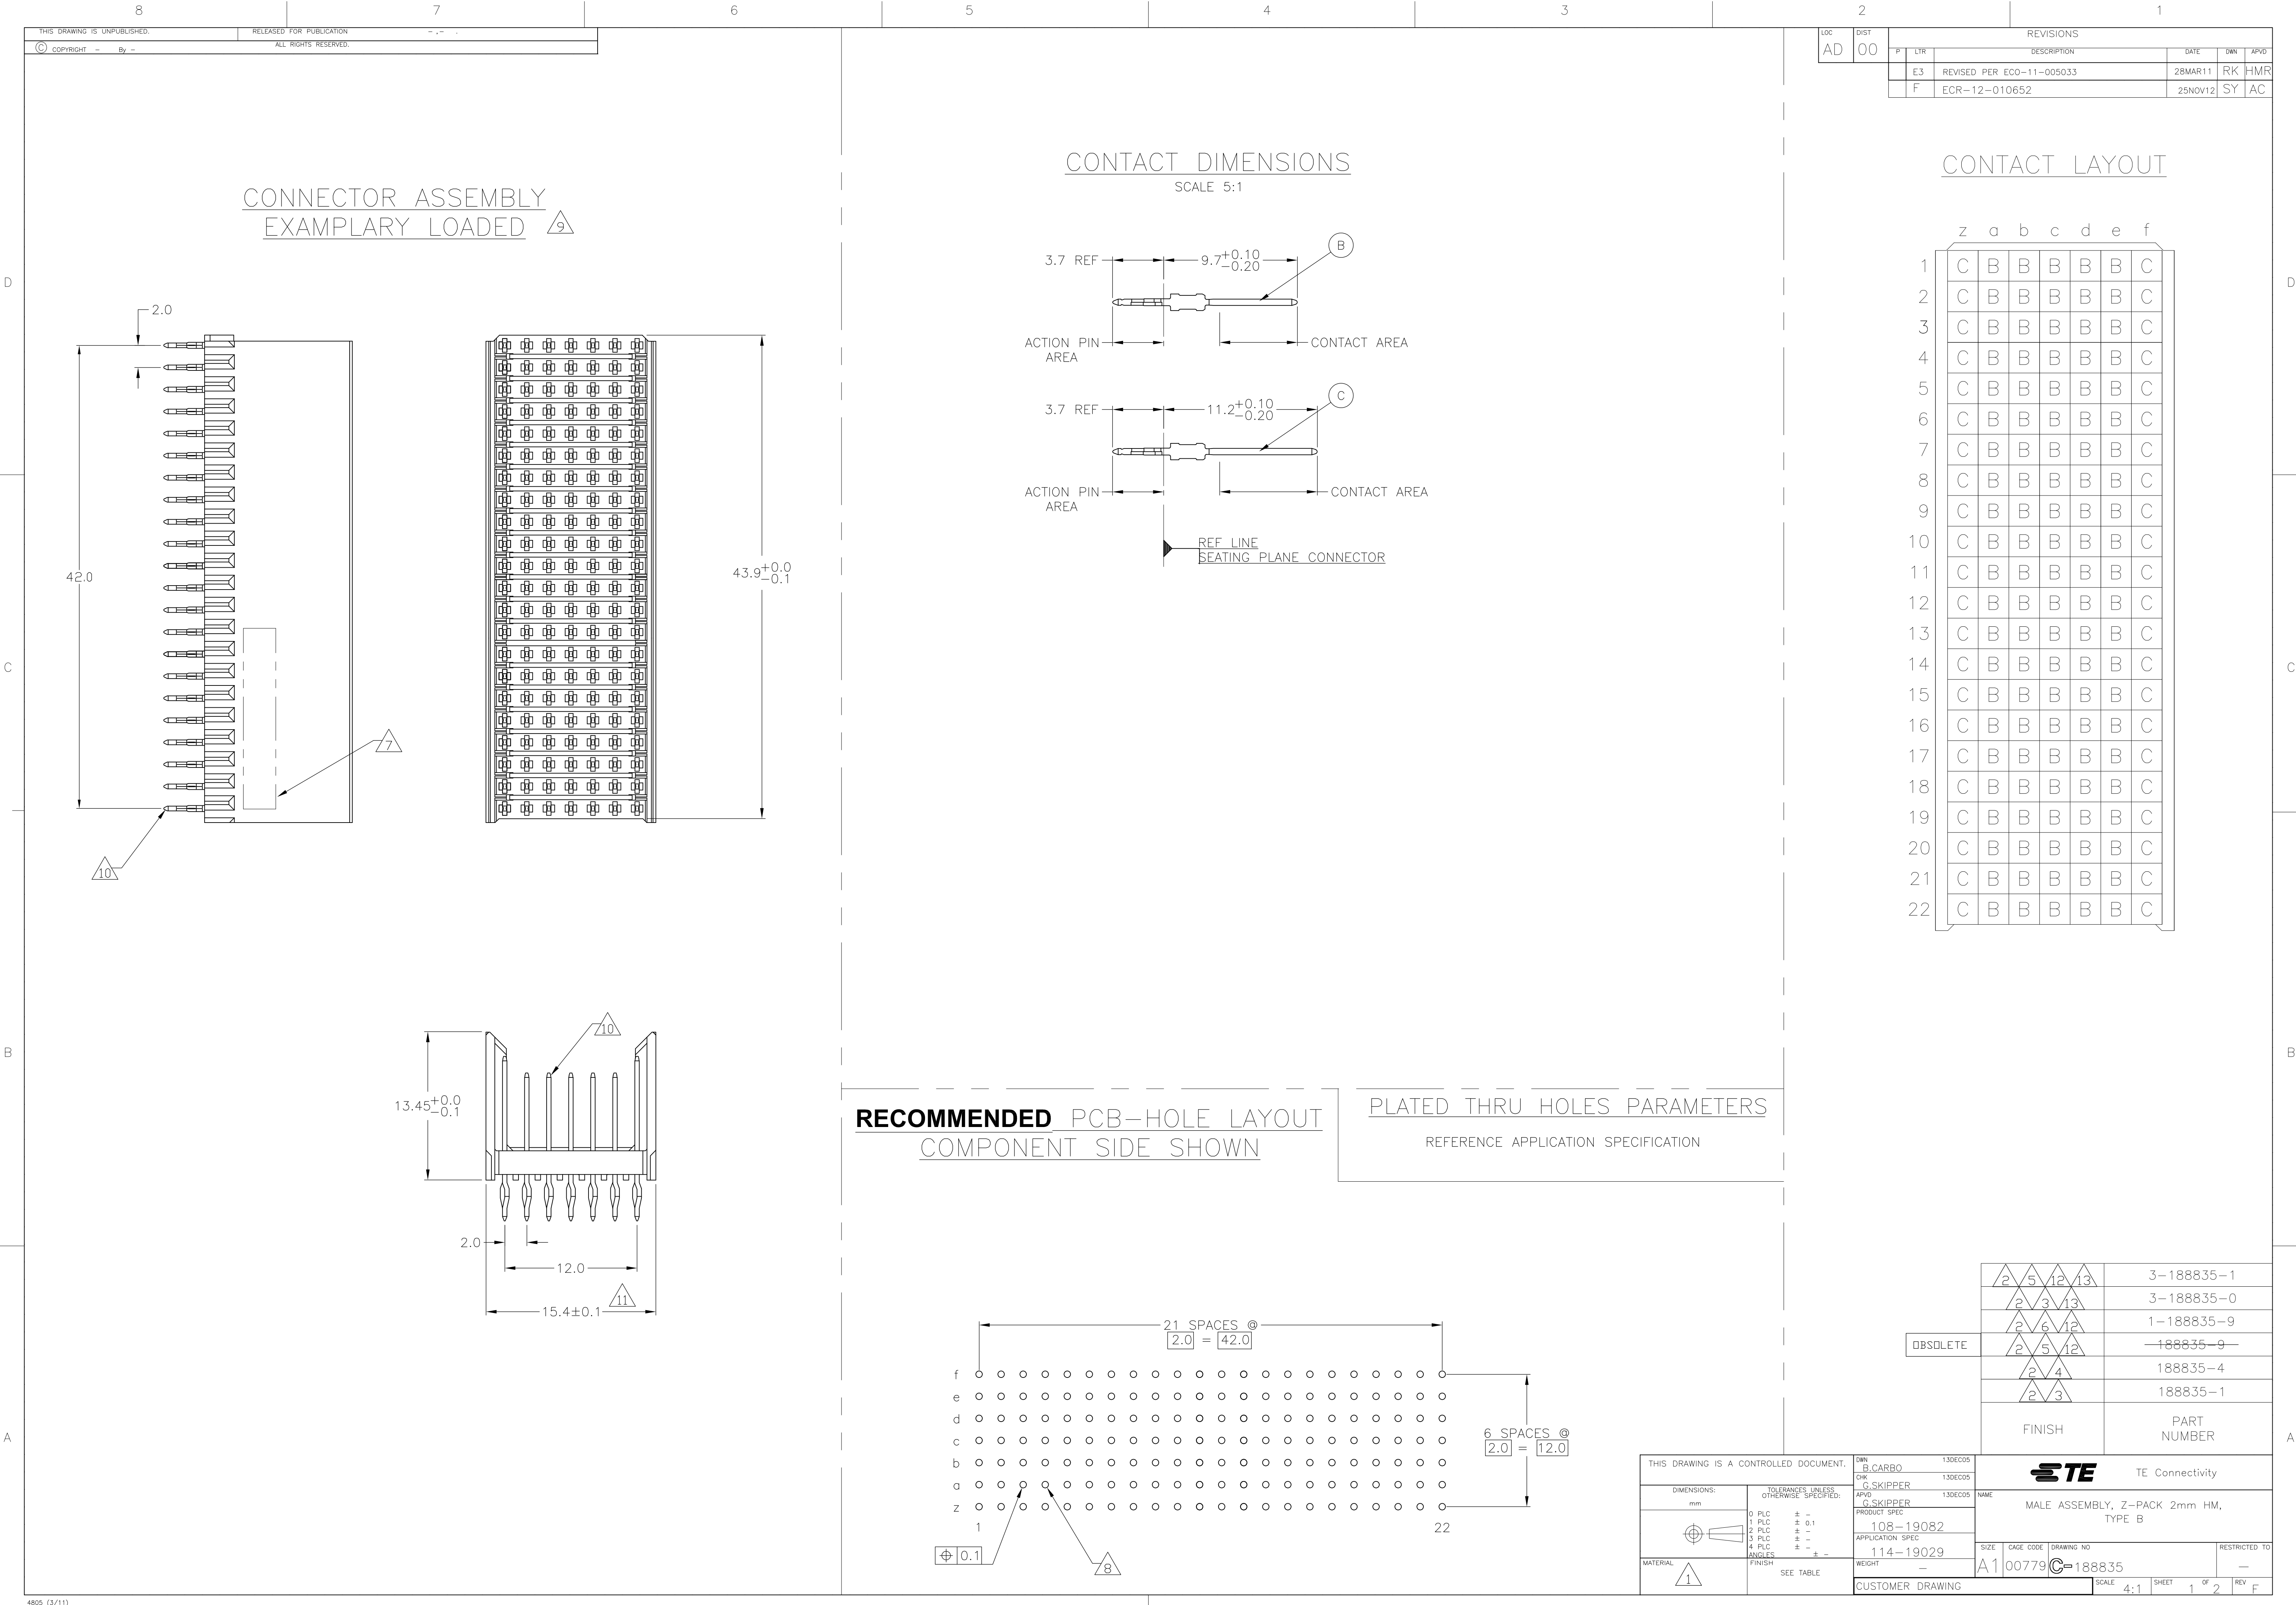

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOC

DIST

REVISONS

AD

00

P

LTR

DESCRIPTION

DATE

DWN

APVD

—

—

SEE SHEET 1

—

—

—

1

MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.

2

GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27μm MIN NICKEL AND ACTION
PIN: 0.5μm MIN TIN\LEAD.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.

3

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.

4

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.

5

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.

6

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.

7

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.

8

PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.

9

FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".

10

FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".

11

TO BE MEASURED AT BOTTOM OF SHROUD.

12

CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

13

0.76um MIN GOLD PLATING AT MATING SURFACES.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
B CARBO
CHK
G SKIPPER
APVD
G SKIPPER

13DEC05
13DEC05
13DEC05

DIMENSIONS:
mm

0 PLC ± -

1 PLC ± 0.1

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

MATERIAL
SEE SHEET 1

FINISH
SEE SHEET 1

WEIGHT
—

TE Connectivity

NAME
MALE ASSEMBLY, Z-PACK 2mm HM,
TYPE B

SIZE
A1

CAGE CODE
00779

DRAWING NO
188835

RESTRICTED TO
—

CUSTOMER DRAWING

SCALE
4:1

SHEET
2

OF
2

REV
F

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[188835-1](#)