
REVISIONS REV DESCRIPTION 01<sub>1</sub> REVISED ±.010 ±.001 .140 .050 .<u>200</u> 5.1 3.6 1.3 .080. ±.001 2.0 ±.001 <u>.149</u> DIA .035 0.9 3.8 DIA ±.002 .079 2.0 DIA ±.0025 ±.0005 <u>.1375</u> 3.5 <u>.1015</u> 2.6 DIA .145 3.7 DIA DIA .005 X 45° CHAM-±.002 .013 0.3 ±.001 IRON NICKEL COBALT SEALING ALLOY (KOVAR) PER ASTM F15-78 CONTACT EXT HOUSING .125 3.2 DIELECTRIC CORNING GLASS 7070 ±.001 .006 COMPONENT MATERIAL ±.001 0.2 DATE 1/30/95 .<u>180</u> 4.5 UNLESS OTHERWISE SPECIFIED DRAWN BY R.  $\sim$ DIMENSIONS ARE N INCHES TOLERANCE ON CHECKED BY DEC. ANGLES FRAC. 8/23/95 **AMIP** APPD B1 RECOMMENDED MOUNTING HOLE • 1/64 **•.005** + 1° TITLE These drawings and specificat-USE ASS'Y PROCEDURE ions are the property of M/A-COM .XXX = inInterconnect Division and shall XX.X = mmnot be reproduced or copied or used in whole or in part as the SIZE CODE DENT NO. basis for the manufacture or В NO. A.P.\_\_\_\_N/A 26805 sale of item(s) without written permission. SCALE 20:1

CUSTOMER DRAWING

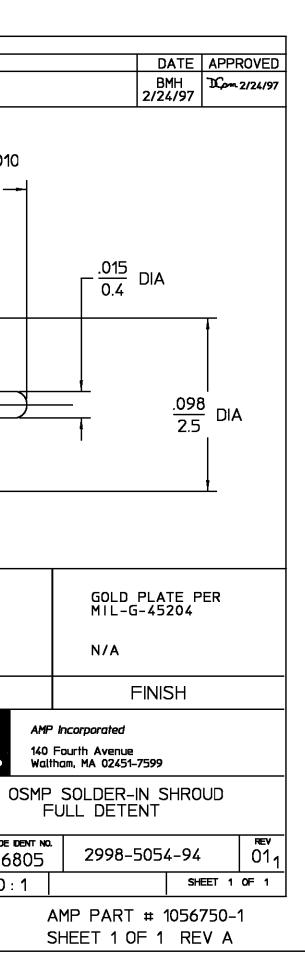

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 2998-5054-94