


NUMBER
C-380310

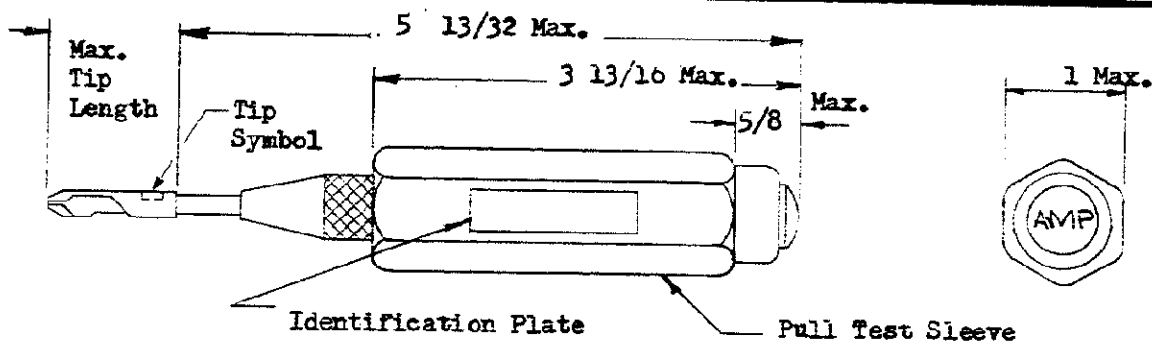

Tool Number	Trip Force	Tip Number	Tip Symbol	Tip Length
* 380310-1	20-22	395005	F	25/32
380310-2	12-13	395005	F	25/32
380310-3	12-13	395042	G	1 5/32
* 380310-4	20-22	395042	G	1 5/32
* 380310-7	20-22	380301-1	A1	1 23/32
380310-8	16-18	380301-1	A1	1 23/32
380310-9	12-13	126042-1	S1	1

* 20-22 pound tool to be used exclusively for inserting terminals into receptacles mounted in resilient material.

APPLICATION TOOLING ENGR'G.
CONNECTOR PRODUCTS DIV.

1. For Tool usage, see Instruction Sheet # 7076.
2. For Tip dimensions, see Tip Customer Drawing.
3. For readjustment or replacement of parts other than Tips, return Tool to AMP, Inc., Mt. Joy, Penna. to insure proper calibration.
4. Trip force is the force in pounds, required to trip tool.
5. A force of 10-12 pounds is required to make the Pull Test Sleeve move .100 inches.

PRINT DIST. DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

				©1956 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER COPY REFERENCE ONLY	
J-3 Loc. M was R				P2		8/24/75	
J-2 ADDED 380310-9				4H		SS 10/1/63	
J-1 ADDED 20-22* NOTE				JES		LH 2/2/63	
J-1 REV. & REDRAWN				JES		NT 4/1/63	
REVISION RECORD				DR	CHK	DATE	
DR JES 11/2/63				DE JES 1/5/63			
CHK JES 11/2/63				APP JES 1/5/63			
MATERIAL AND FINISH				Steel-Plated; Aluminum		AMP INCORPORATED HARRISBURG, PENNA.	
Weight 6 ± 1 1/2 Oz.				CLASS		TYPE	
WIRE — RANGE — INSULATION				TYPE			
TOLERANCE EXCEPT AS NOTED ± .015 ± 1° 0'				SCALE		LOC M A NO C-380310 REV J-3	
NAME				TOOL-STANDARD CERTI-LOK INSERTION WITH PULL TEST FEATURE			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[380310-2](#)