


INTERFACES WITH
MIL-C-26482, SERIES 2

Ø .782
MAX OVER
KNURL

MATING INDICATOR
LINES PAINTED A
CONTRASTING COLOR
TYPICAL 3 PLACES

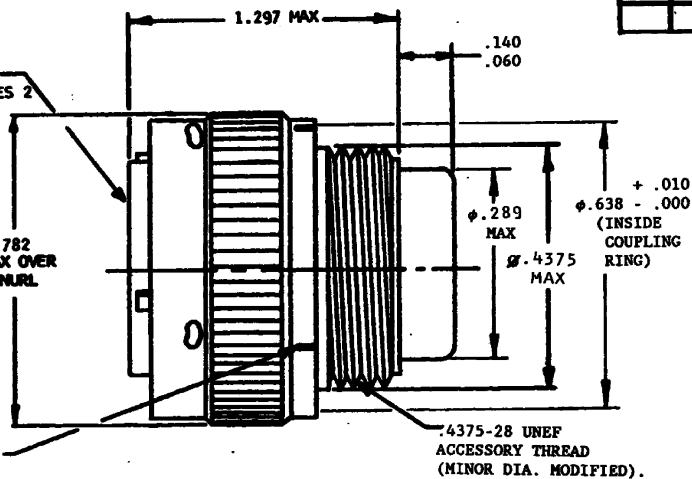

N/C

22059-8-4S

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
N/C	NEW RELEASE PER E.O. 111787	5-24-91	Q

- CONTACT CAVITY IDENTIFICATION IS SHOWN FOR FRONT FACE OF INSERT. REAR INSERT MARKED OPPOSITE. (NOTE: CHARACTERS MAY NOT BE SHOWN IN TRUE POSITION).
- CONNECTORS ARE DESIGNED FOR USE WITH THE FOLLOWING COMPONENTS:
CONTACTS: PART NO. 4102-18-1131 (SOCKET).
SEALING PLUG: PART NO 4113-4-2001.
CONTACT INSERTION TOOL: PART NO M15513-20-4.
CONTACT REMOVAL TOOL: PART NO. M15515-20-4.
CONTACT CRIMPING TOOL: DANIELS CO. PART NO. AFM8 & K2 POSITIONER.
- MATERIAL & FINISH:
SHELL AND COUPLING RING: ALUMINUM ALLOY PER MIL-C-26482, SERIES 1,
OLIVE DRAB CADMIUM PLATE PER QQ-P-416 TYPE II, CLASS 2 OVER ELECTROLESS NICKEL.
CONTACTS: HIGH GRADE COPPER ALLOY, GOLD PLATE PER MIL-C-45204, TYPE II, CLASS 1 OVER NICKEL.
INSERT: THERMOPLASTIC PER MIL-C-26482.
SEALS: DEUTSCH FLUID RESISTANT SILICONE ELASTOMER. A PROPRIETARY BLEND OF FLOUROSILICONE & METHYL VINYL SILICONE.
- FOR AVAILABLE SIZE 8 CONTACT ARRANGEMENTS AND ALTERNATE INSERT POSITIONS SEE DEUTSCH ENVELOPE DRAWING 922500 SHEET 3.
- DIMENSIONS ARE SHOWN IN INCHES UNLESS OTHERWISE SPECIFIED.

NOTES:

SIGNATURE & DATE	
DR	<i>Raymond H. [Signature]</i>
CHK	<i>10/24/91 5-24-91</i>
PE	<i>Raymond H. [Signature]</i>
APPD	
SCALE	NONE WT

PLUG,
BAYONET COUPLING CONNECTOR
(WITH SNAP RING RETENTION CONTACTS)

ENVELOPE

CP		The Deutsch Company ELECTRONIC CONNECTING DEVICES Huntington Beach, California	
B	22059-8-4S		
REV	111787	SHEET	1 OF 1

May 16, 2011

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[22059-8-4SW](#)