




P405 / PR405 Series

0.250" (6.35mm)

Snap-in LED Panel Indicator

Prominent snap-in LED indicator, single or bi-color LED
Voltage: 2VDC - 120VAC

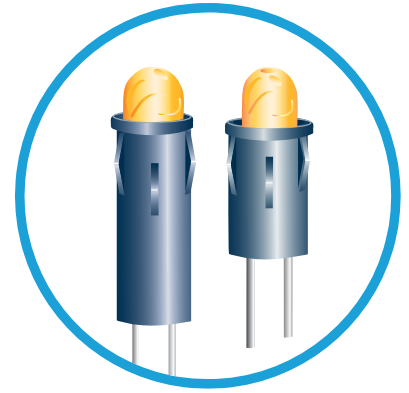

Key features

- Mounting hole size: .249" (6.32mm) to .252" (6.40mm)
- For panels: .031" (.79mm) to .125" (3.18mm)
- Prominent with black bezel that enhances the LED contrast
- Voltage: 2-60 VDC or 120VAC
- Terminals: Bi-pin or wire leads (6" wire leads, 24 AWG)
- Available with a variety of LEDs including AlInGaP and InGaN technology for high brightness applications, bi-color and with integrated resistors
- T-1 3/4 (5mm) LED
- Available in six LED single colors: red, amber, orange, green, blue and white
- Available in one bi-color: red/green.
- Low power consumption - uses up to 90% less energy than an incandescent indicator
- Front panel snap-in mounting requires no additional hardware
- LEDs operate significantly cooler than traditional lamps
- Compliant with RoHS and REACH

TO ORDER, FOLLOW THE EXAMPLE:Select one **BOLD** component from each numbered category in the tables below.

1 Model **2 LED** **3 Voltage**
 PR405 -BR 12H

→ Part Number **PR405-BR12H:**

1 Model	Wires	Description			
P405 PR405	W (optional)	Voltage = 2 (External Resistor Required) Voltages 5H - 120			

STANDARD INTENSITY - DIFFUSED ENCAPSULATION					
2 LED	Color	λ_{pk} (nm)	I_v^[1] (mcd)	Viewing Angle	V/C Table^[2]
-BR	RED	635	14	60	I
-BA	AMB	583	16	60	I
-BG	GRN	565	10	60	I

MEDIUM INTENSITY - TINTED ENCAPSULATION					
LED	Color	λ_{pk} (nm)	I_v^[1] (mcd)	Viewing Angle	V/C Table^[2]
-BCR	RED	635	120	35	I
-BCA	AMB	583	100	35	I
-BCG	GRN	565	80	24	I

HIGH INTENSITY - WATERCLEAR ENCAPSULATION					
LED	Color	λ_{pk} (nm)	I_v^[1] (mcd)	Viewing Angle	V/C Table^[2]
-NWR	RED	634	2800	30	I
-NWO	ORG	605	2000	30	I
-NWA	AMB	592	2800	30	I
-NWG	GRN	520	2400	45	II
-NWB	BLU	465	700	45	II
-NWW	CWHT		2500	50	II
-NWL	WWHT		1800	50	II
-NKR	RED	634	3600	15	I
-NKO	ORG	605	8000	15	I
-NKA	AMB	592	3600	15	I
-NKG	GRN	520	10000	15	II
-NKB	BLU	465	3000	15	II
-NKW	CWHT		9200	20	II
-NKL	WWHT		9200	15	II

SPECIALTY LEDs - DIFFUSED ENCAPSULATION						
LED	Color	λ_{pk} (nm)	I_v^[1] (mcd)	Viewing Angle	V/C Table^[3]	Description
-RLP ^[5]	RED	635	2.3	50	[3]	Low Power
-ALP ^[5]	AMB	583	2.1	50	[3]	Low Power
-GLP ^[5]	GRN	565	2.3	50	[3]	Low Power
-LRG	RED/GRN	660/565	90/40	60	I	Bi-Color, Red Cathode

3 Voltage^[3]	
2	
5H	
12H	
15H	
24H	
28H	
48H	
60H	
120 ^[4]	

[1] I_v = typical luminous intensity @ I_f = 20mA (T_a = 25°C), Low Power LEDs @ I_f = 2mA.


[2] See Voltage/Current table for design specifications. Design current for low power LEDs = 2mA.

[3] T_a = 25°C. Voltages 5H through 60H and VDC. For AC operation, insert D after Voltage (e.g. 24HD).


D indicates built-in rectifier, not required for 5H or 120VAC. DC operation

[4] Select high intensity LEDs only.


[5] Omit the H when selecting voltage (e.g. PR405-RLP12).

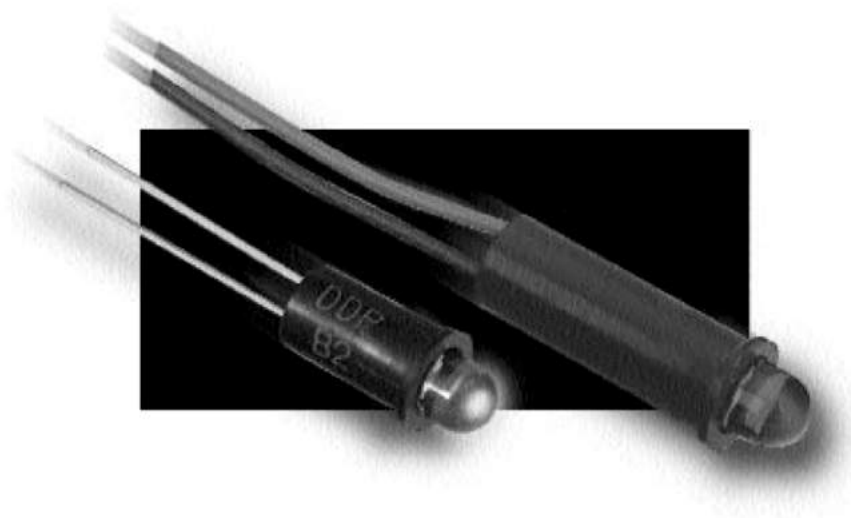

P405

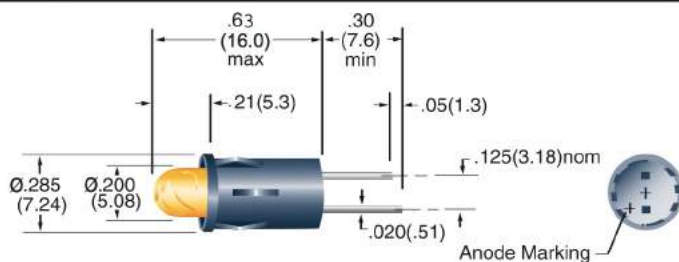

PR405

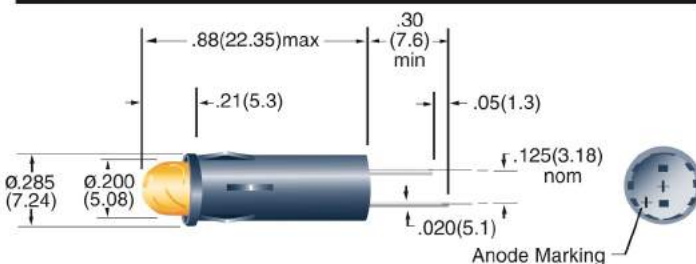

Standard Wire Leads:

6.0" total length(nominal)/.50" stripped (nominal), red anode/black cathode, 24 AWG TPB UL1061 insulation. Contact factory for other lengths, gauges and colors.

All dimensions are in inches (mm)

Tolerances: .xx"(.x) $\pm .025$ "(.63) / .xxx"(.xx) $\pm .010$ "(.25)
Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[PR405W-BR24HD](#) [PR405-NWW28H](#) [PR405W-BCG5H](#) [P405W18-BG2-R-](#) [P405W-NWB2](#) [P405W-BA2](#) [PR405W-BG120](#) [PR405W-BR24H](#) [PR405-BG5H](#) [PR405W-BCG5H-R-](#) [P405W18-BR2-R-](#) [P405W-NWB2-R-](#) [PR405W15-BCG12H-R-](#) [PR405W9-G110H](#) [PR405W12-BR5H](#) [PR405W-BCG12H-R-](#) [PR405-LRG5H](#) [PR405W12-BCR28H](#) [PR405W9-R110H](#) [P405W-LRG2](#) [PR405W-BG24H](#) [PR405-BR12H-R-](#) [PR405W-BCG15H](#) [PR405-NWO5H](#) [PR405W-G120](#) [P405W-BG2](#) [PR405W-NKR24H](#) [PR405-BA12H-R-](#) [P405W-BCG2-R-](#) [PR405-BG12H](#) [PR405-NWB15H](#) [PR405W-BG12H](#) [PR405-NWL12H](#)