
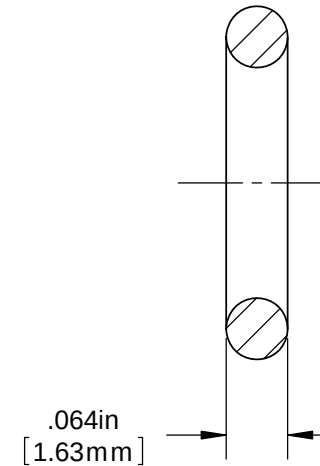


NOTES:

1. OPERATING TEMPERATURE: -65°F TO +300°F
2. U.S. & FOREIGN PATENT ISSUED

REVISIONS					
ECN #	REV.	DESCRIPTION	DATE	INITIALS	CHK'D
	N/A	INITIAL RELEASE	7/12/01	JS	N/A
	001	REVISED PER ECR111009AZ01	2/12/10	KH	DPZ

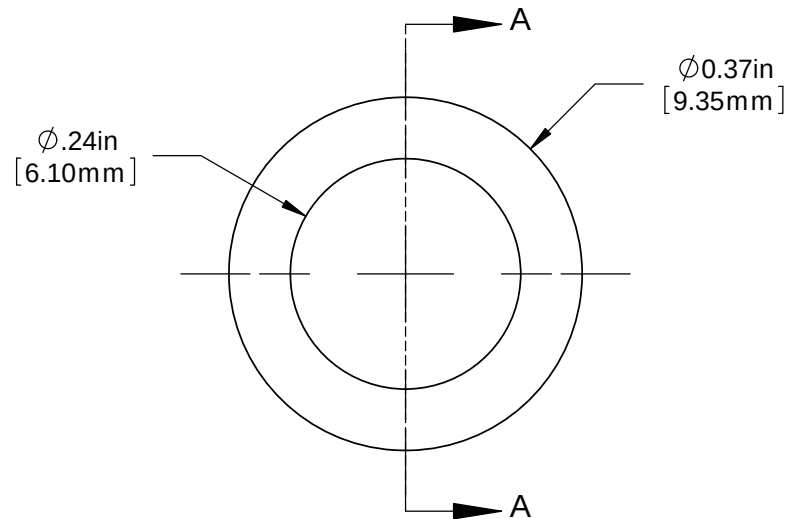


SECTION A-A



ISOMETRIC VIEW

DIMENSION STYLE: INCHES (MM) GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED		
	INCHES	MM
.X	± .020	± .508
.XX	± .010	± .254
.XXX	± .005	± .127

ANGLE ± 1°



THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
VISUAL COMMUNICATIONS COMPANY, INC.
ANY REPRODUCTION IN PART OR AS
A WHOLE WITHOUT THE WRITTEN
PERMISSION OF VISUAL
COMMUNICATIONS COMPANY, INC IS
PROHIBITED.

APPROVAL		DATE	 OPTOELECTRONICS 190 BOSSTICK BLVD. SUITE 101 SAN MARCOS, CA 92069 U.S.A PHONE: (760) 560-1300, FAX: (760) 560-1301 EMAIL: vccsales@vcclite.com		
DRAWN	KHOWARD	2/12/11			
CHECKED	DPZ	2/12/11			
MATERIAL (EPDM) ETHYLENE PROPYLENE DIENE RUBBER, BLACK			TITLE: LENS SPACER SPC 060		
FINISH NONE					
DO NOT SCALE DRAWING			SIZE A	DWG. NO. SPC 060	REV 001
			SCALE: 5:1		SHEET 1 OF 1

VCCG OPTOELECTRONICS

190 BOSSTICK BLVD. SUITE 101 SAN MARCOS, CA 92069 U.S.A.
PHONE: (760) 560-1300, FAX: (760) 560-1301 EMAIL: vccsales@vccclite.com

LENS SPACER SPC 060

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

SPC_060