	8	7		6	5		4		3			2		1	
												F	REVISIONS		
										ZON	E REV.	DESC	RIPTION	DATE	APPROVED
										ALI	L E		RELEASE		
D							[ITEM NO	PART NO			DETAIL DWG R			
							-	1 2	SEE TABLE FOR		ME ALUM. SE ALUM.	M 3926-D5.2 M 4906-D5.1			
							-	3	PART NO			M 4906-D5.5			
							-	4	HD51	HARD	WARE KIT		1		
		1					CAT. NO.						SIDE		
		\times					FINISH:CLEA	N (WIDTH) L (LENGTH)	H (HEIGHT)	FRAME P/N ITEM 1	BASE P/N ITEM 2	COVER P/N	CARD SIZE REF.	
			\mathbf{V}				R ANODIZED W10-23-38B	1.000	2.310	3.810	M3926-2-21	SR1-23-3B	ITEM 3 PL 2338	2.20 x 3.70	
							W16-12-12B	1.000	1.210		M3926-2-21 M3926-2-13		PL 2330	1.10 x 1.10	
		H±.06			L±.03		W16-28-46B		2.850		M3926-2-15	SR16-28-3B		2.73 × 4.50	
							W16-31-21B	1.600	3.100		M3926-2-17	SR16-31-3B	PL 2131	2.98 × 2.00	
С	/						W16-31-31B		3.100		M3926-2-19	SR16-31-3B		2.98 × 2.98	
							W16-46-31B W20-15-15B		4.610		M3926-2-67 M3926-2-23	SR16-46-3B SR2-15-3B	PL 3045 PL 1515	4.50 x 2.98	
						<	W20-28-15B		1.510 2.850	1.510	M3926-2-25	SR2-15-3B SR2-28-3B	PL 1515	1.40 x 1.40 2.73 x 1.40	
	(4)						W20-28-46B		2.850		M3926-2-27	SR2-28-3B	PL 2846	2.73 x 4.50	
						\mathbf{X}	W20-31-31B		3.100	3.100	M3926-2-29	SR2-31-3B	PL 3131	2.98 x 2.98	
							W20-31-42B		3.100		M3926-2-1	SR2-31-3B	PL 3142	2.98 x 4.06	
	e e					4	W20-46-31B	2.000	4.610		M3926-2-31	SR2-46-3B	PL 3045	4.50 × 2.98	
->						Y	W20-46-46B W20-46-62B		4.610 4.610		M3926-2-33 M3926-2-3	SR2-46-3B SR2-46-3B	PL 4646 PL 4662	4.50 × 4.50 4.50 × 6.06	-
	e (e						W20-46-66B		4.610		M3926-2-35	SR2-46-3B	PL 4565	4.50 × 6.50	
	S						W20-61-36B		6.110	3.610	M3926-2-37	SR2-61-3B	PL 3661	6.00 x 3.50	
							W20-66-46B		6.610	4.610	M3926-2-39	SR2-66-3B	PL 4565	6.50 x 4.50	
							W30-46-46B		4.610	4.620	M3926-2-41	SR3-46-3B	PL 4646	4.50 × 4.50	
					// X		W30-66-46B W30-86-45B		6.610		M3926-2-43	SR3-66-3B	PL 4565	6.50 x 4.50	
_		\land		\backslash			W30-10-46B	3.000	8.610 10.000		M3926-2-45 M3926-2-47	SR3-86-3B SR3-10-3B	PL 8646 PL 10046	8.50 × 4.50 9.88 × 4.50	
В			\mathcal{N}	N X	3		W30-10-66B		10.000		M3926-2-49	SR3-10-3B		9.88 x 6.50	
	(2)—						W30-10-90B		10.000		M3926-2-63	SR3-10-3B	PL 10080		
	\sim	\sim		× ×			W45-28-31B		2.850		M3926-2-51	SR45-28-3B		2.73 x 2.00	
							W45-46-21B		4.610		M3926-2-53	SR45-46-3B		4.40 x 2.00	
			\				W45-66-46B W45-86-46B	4.500	6.610 8.610		M3926-2-55 M3926-2-57	SR45-66-3B SR45-86-3B		6.50 x 4.50 8.50 x 4.50	
							W45-10-46B		10.000		M3926-2-59	SR45-00-3B		9.88 x 4.50	
			S Co				W45-10-66B		10.000		M3926-2-61	SR45-10-3B		9.88 × 6.50	
			\sim				53-0065	2.000	4.610		53-0065-02	53-0065-03	53-0065-01		
			0 2					1.600	9.307	6.346	M3926-2-20	SR16-93-3B		6U X 160mm	
A	4. FOR DUAL-TONED	DG NO. AS REQ'D FO MULTI-MODS WITH E EE DWG. MC4906-D3	DR S.E.S. 21 BEZEL SEE DWO 3.10	G. M4906-D3.21				DIMENSIC TOLERAN FRACTIOI ANGULAR TWO PLA	NAL±	DRAWN CHECKED ENG APPR	TRUSHAR 11/	04/08 ELECTRON	MULTI-N ASS	ADD CASE SEMBLY DARD(W-B S	
					- M4006 D5 22)			INTERPRE	ET GEOMETRIC	Q.A.	•				-
	2. CENTER TILT-UP B			•	J. 1V14900-DJ.ZZ)	DRAWING IS TH	ON CONTAINED IN THIS E SOLE PROPERTY OF				E PROJECTION		WG. NO.		REV
	1. FOUR BUMPFEET T	O BE SUPPLIED WIT	H EACH UNIT A	AS SHOWN		REPRODUCTION	RONICS & TECH., INC. AN	.E				B	M49(06 D3.9	
	NOTES : UNLESS OTH	IERWISE SPECIFIED)			VECTOR ELECT	VRITTEN PERMISSION OF RONICS & TECH., INC. IS						ĺ	1	
						PROHIBITED.			T SCALE DRAWING			SCALE	: 1:4 WEIGH	HI: SHE	ET 1 OF 3
	8	7	T	6	5		4	I	3	1		2	I	1	


D

В

С

		8			7			Ċ	6		5	÷		4				3	
		1			SHO	OWN IN	I FLAT	8			l.	_	— m					П	
		-				F -						1							ZONE
				I					1					.005					ALL
							D ——							.005					
) 1							С			\times			-	
D	.235 —		~	<u> 9</u> 0°	\checkmark											90	00°		
D	•																00		
	T				Ī													4	
)32			04	2±.005				R	R.095 —			— B				
		2 PI	LCS.				2±.005 PLCS.					1.035							
		8 MATERIAL	EINIGH	Δ.	В	C	D	E	F								_		
	M3926-2-		4	A 2.000	D 3.100	4.125	3.025	⊏ 4.087	F	PART NO 8	MATERIAL SR2-062-0	FINISH	A	B	C 6.564	D	E	F	
	M3926-2-		4	2.000	3.100	8.600	3.025	8.562	20.149	M3926-2-35 M3926-2-36	SR2-062-0 SR2-062-0	4 N/A	2.000	4.610	6.564	4.535 4.535	6.526 6.526	17.587 17.587	
	M3926-2-3		4	2.000	4.610	6.125	4.535	6.087	16.709	M3926-2-37	SR2-062-0	4	2.000	6.110		6.035	3.526	13.087	
	M3926-2-4	\$ SR2-062-0	4	2.000	4.610	8.600	4.535	8.562	21.659	M3926-2-38	SR2-062-0	N/A	2.000	6.110		6.035	3.526	13.087	
	M3926-2-		4	1.600	3.100	4.125	3.025	4.087	11.199	M3926-2-39	SR2-062-0	4	2.000	6.610		6.535	4.526	15.587	
	M3926-2-		4	1.600	4.610	6.125	4.535	6.087	16.709	M3926-2-40	SR2-062-0	N/A	2.000	6.610	4.564	6.535	4.526	15.587	
С	M3926-2-		N/A	2.000	3.100	4.125	3.025	4.087	11.199	M3926-2-41	SR3-062-0	4	3.000	4.610		4.535	4.536	13.607	
	M3926-2-4 M3926-2-4		N/A N/A	2.000	3.100 4.610	8.600 6.125	3.025 4.535	8.562 6.087	20.149 16.709	M3926-2-42	SR3-062-0	N/A	3.000	4.610		4.535	4.536	13.607	
		0 SR2-062-0	N/A	2.000	4.610	8.600	4.535	8.562	21.659	M3926-2-43	SR3-062-0	4	3.000	6.610		6.535	4.526	15.587	
		1 SR16-062-0	N/A	1.600	3.100	4.125	3.025	4.087	11.199	M3926-2-44 M3926-2-45	SR3-062-0 SR3-062-0	N/A 4	3.000	6.610 8.610		6.535 8.535	4.526 4.526	15.587 17.587	
		2 SR16-062-0		1.600	4.610	6.125	4.535	6.087	16.709	M3926-2-45	SR3-062-0	A N/A	3.000	8.610		8.535	4.526	17.587	
	M3926-2-	3 SR16-062-0	4	1.600	1.210	1.164	1.135	1.126	3.387	M3926-2-47	SR3-062-0	4	3.000		4.564	9.925	4.526	18.977	
		4 SR16-062-0	1	1.600	1.210	1.164	1.135	1.126	3.387	M3926-2-48	SR3-062-0	N/A	3.000	10.000		9.925	4.526	18.977	
		5 SR16-062-0		1.600	2.850	4.564	2.775	4.526	11.827	M3926-2-49	SR3-062-0	4	3.000	10.000	6.564	9.925	6.526	22.977	
		6 SR16-062-0		1.600	2.850	4.564	2.775	4.526	11.827	M3926-2-50	SR3-062-0	N/A	3.000	10.000		9.925	6.526	22.977	
		7 SR16-062-0 8 SR16-062-0		1.600	3.100 3.100	2.064	3.025 3.025	2.026	7.077	M3926-2-51	SR45-062-0	4	4.500	2.850		2.775	2.026	6.827	DIM.
		9 SR16-062-0		1.600	3.100	3.054	3.025	3.016	9.057	M3926-2-52	SR45-062-0	N/A	4.500	2.850		2.775	2.026	6.827	
		20 SR16-062-0		1.600	3.100	3.054	3.025	3.016	9.057	M3926-2-53 M3926-2-54	SR45-062-0 SR45-062-0	4 N/A	4.500 4.500	4.610		4.535 4.535	2.026 2.026	8.587 8.587	
		21 SR1-062-0	4	1.000	2.310	3.764	2.235	3.726	9.687		SR45-062-0	4	4.500		4.564		4.526	15.587	
В	M3926-2-2	22 SR1-062-0	N/A	1.000	2.310	3.764	2.235	3.726	9.687		SR45-062-0	N/A	4.500		4.564	6.535	4.526	15.587	
		23 SR2-062-0	4	2.000	1.510	1.464	1.435	1.426	4.287	M3926-2-57	SR45-062-0	4	4.500	8.610		8.535		17.587	
		24 SR2-062-0	N/A	2.000	1.510	1.464	1.435	1.426	4.287	M3926-2-58	SR45-062-0	N/A	4.500	8.610	4.564	8.535	4.526	17.587	
		25 SR2-062-0 26 SR2-062-0	4	2.000	2.850	1.464	2.775 2.775	1.426	5.627	M3926-2-59	SR45-062-0	4	4.500	10.000		9.925	4.526	18.977	
		26 SR2-062-0 27 SR2-062-0	N/A	2.000	2.850 2.850	1.464 4.564	2.775	1.426 4.526	5.627 11.827	M3926-2-60	SR45-062-0	N/A	4.500	10.000		9.925	4.526	18.977	
		28 SR2-062-0	N/A	2.000	2.850	4.564	2.775	4.526	11.827	M3926-2-61 M3926-2-62	SR45-062-0 SR45-062-0	4 N/A	4.500 4.500	10.000		9.925 9.925	6.526 6.526	22.977 22.977	
		29 SR2-062-0	4	2.000	3.100	3.054	3.025	3.016	9.057	M3926-2-62	SR45-062-0	4	3.000	10.000		9.925		25.757	
	M3926-2-3	30 SR2-062-0	N/A	2.000	3.100	3.054	3.025	3.016	9.057	M3926-2-64	SR3-062-0	- N/A	3.000	10.000		9.925		25.757	
		31 SR2-062-0	4	2.000	4.610	3.054	4.535	3.016	10.567	M3926-2-65	SR2-062-0	4	2.000	2.850		2.775		11.847	
		32 SR2-062-0	N/A	2.000	4.610	3.054	4.535	3.016	10.567	M3926-2-66	SR2-062-0	N/A	2.000		4.574	2.775		11.847	
		33 SR2-062-0	4	2.000	4.610	4.574	4.535	4.536	13.607	M3926-2-67	SR16-062-0	4	1.600	4.610	3.050	4.535	3.012	10.559	
	IVI3926-2-	34 SR2-062-0	N/A	2.000	4.610	4.574	4.535	4.536	13.607	M3926-2-68	SR1-062-0	4	1.000	8.214	9.194	8.139	9.156	26.451	
		NO. SHOWN				בו אדיי מ	יוסאסי									DI	IENSIONS A	RE IN INCHES	
А									J · T\A/I	ST 1°/FOOT						то	LERANCES: ACTIONAL ±		DRAWN
		NDS TO BE							, , , , , , , , , , , , , , , , , , , 	311/F001						AN	GULAR: ±.5°	ECIMAL ±.03	CHECKED
		I: ANOD., C	-						5							ТН	REE PLACE	DECIMAL ±.010	ENG APPR.
	3. DEGR		/ vi		.,			,	~						NTAINED IN		ERPRET GEO		MFG APPR.
	2. REMO	VE ALL BUF											DRAWING	IS THE SOLE	E PROPERTY S & TECH., IN	OF			Q.A.
	1. MAT'L	: AL. EXTRL	JSION,	P/N# : :	SEE T/	ABLE							REPRODU	CTION IN PA	RT OR AS A	WHOLE	NISH	_	
	NOTES :	UNLESS OT	THERW	ISE SP	ECIFIE	ED								LECTRONIC	S & TECH., IN	IC. IS			ý
		8			7				6		5	Ť		4				3	

		2	I	1		
			REVISIONS			
NE	REV.		DESCRIPTION	DATE	APPROVED	
L		ENGI	NEERING RELEASE			
						D
		<u>п</u> Г Л _	uuuul			D
			— A — —			
					-	
						С
					-	€
		5. REF.	INFORMATION			
Л.	Α		ATL. WIDTH			
		= CASE L				
			HEIGHT046			
	-		HEIGHT OF STYLE	E "B")		_
	D	= B07		,		В
		= C038				
		= 2E + D				
	N	AME DATE	VECTOR		NOWEN ST., IOLLYWOOD,	
	TRU	ISHAR 07/22/08	ELECTRONICS & TECHNOLOG	A PIC CA 9160	5	А
D			FRAME, E	XTRUDED		
PR.			VECTORPAK & M	ULTI-MOD	CASES	
PR.			SIZE DWG. NO.		REV	
			в М3926	SD5 2		
÷)—[
+	·		SCALE: 1:4 WEIGHT	: SHEI	ET 2 OF 3	
		2		1		

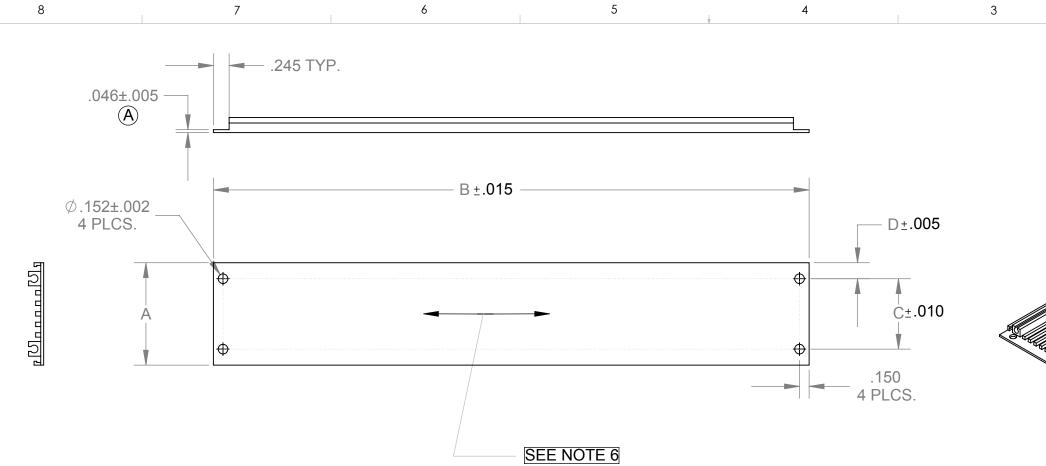

PART NO FINISH: CLEAR ANOD.	MATERIAL P/N NOTE 1	U/O CAT. NO. SER. NOTE 4	PART NO FINISH:NONE	А	В	С	D	
SR1-23-3B	SR1-062	W10-23-38B	SR1-23-3B-0	1.000	2.310	0.546	0.227	
SR16-12-3B	SR16-02	W16-12-12B	SR16-12-3B-0	1.600	1.210	1.100	0.250	-
SR16-28-3B	SR16-02	W16-28-46B	SR16-28-3B-0	1.600	2.850	1.100	0.250	
SR16-31-3B	SR16-02	W16-31, -31B, -21B	SR16-31-3B-0	1.600	3.100	1.100	0.250	
SR16-46-3B	SR16-02	W16-46-31B	SR16-46-3B-0	1.600	4.610	1.100	0.250	
SR2-15-3B	SR2-062	W20-15-15B	SR2-15-3B-0	2.000	1.510	1.500	0.250	-
SR2-28-3B	SR2-062	W20-28, -46B, -15B	SR2-28-3B-0	2.000	2.850	1.500	0.250	
SR2-31-3B	SR2-062	W20-31, -42B, -31B	SR2-31-3B-0	2.000	3.100	1.500	0.250	
SR2-46-3B	SR2-062	W20-46-31B, -46B, -62B, -66B	SR2-46-3B-0	2.000	4.610	1.500	0.250	
SR2-61-3B	SR2-062	W20-61-36B	SR2-61-3B-0	2.000	6.110	1.500	0.250	
SR2-66-3B	SR2-062	W20-66-46B	SR2-66-3B-0	2.000	6.610	1.500	0.250	
SR1-82-3B	SR1-062	51 x 3	SR1-82-3B-0	1.000	8.214	0.546	0.227	
SR3-46-3B	SR3-062	W30-46-46B	SR3-46-3B-0	3.000	4.610	2.500	0.250	
SR3-66-3B	SR3-062	W30-66-46B	SR3-66-3B-0	3.000	6.610	2.500	0.250	
SR3-86-3B	SR3-062	W30-86-46B	SR3-86-3B-0	3.000	8.610	2.500	0.250	-
SR3-100-3B	SR3-062	W30-10-46B, -66B	SR3-100-3B-0	3.000	10.000	2.500	0.250	-
SR45-28-3B	SR45-062	W45-28-21B	SR45-28-3B-0	4.500	2.850	4.000	0.250	
SR45-46-3B	SR45-062	W45-46-21B	SR45-46-3B-0	4.500	4.610	4.000	0.250	
SR45-66-3B	SR45-062	W45-66-46B	SR45-66-3B-0	4.500	6.610	4.000	0.250	
SR45-86-3B	SR45-062	W45-86-46B	SR45-86-3B-0	4.500	8.610	4.000	0.250	-
SR45-10-3B	SR45-062	W45-10-46B	SR45-10-3B-0	4.500	10.000	4.000	0.250	-
		U/O SPEC. 4091	M4906-11-1	1.600	5.000	1.100	0.250	
		U/O SPEC. 4439	M4906-11-2	1.000	4.610	0.546	0.227	
								PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VECTOR ELECTRONICS & TECH., INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VECTOR ELECTRONICS & TECH., INC. IS PROHIBITED.
8		7	6			5	Ť	4

D

С

В

А

		3		I		2				1	
								REVISIO	NS		
				ZONE	REV.		DE	SCRIPTION	I	DATE	APPROVED
				ALL		ENGI	NEERIN	IG RELE	ASE		
						2			, .02		
									11100		
+	005							ŴŴ			
<u> </u>						////					
					<i>MM</i>						
)±	.010				1						
		6									
				<u> </u>							
				and a							
											(
,5	-										
											-
						г		י חוחו			
	ALSO	SEEC	JUSTB	B/P (FIN	ISH RE	:F. : CI	LEAR	IRID.)			
	o -			TO 5			~ ~	D 4 11 1			
							JR G	RAIN	RFORE	E PLATIN	G
	5. DIM). MAT'L SE "U" -			гн				
			C = A - 2	-							
	4. FOR			DWG. N	AC4906	5-D3.9					
	3. PAR	T TO	BE DE	GREAS	ED AF	TER F					
										SCRAT	CHES
	1. MAT	L: Al	LUM. E	XTRUSI SEE TA	IUN (60	163-T5) DWC	M42 .ف	211-C5.1	1	
	FUR	NIA I	L P/N	SEE IA	DLE						
I	NOTES	: UNI	ESS O	THERW	ISE SF	PECIFI	ED.				
					01						
ι	JNLESS OTHE	ERWISE SPE	ECIFIED:		NAME	DATE			DR		NOWEN ST., HOLLYWOOD,
	DIMENSIONS		ICHES	DRAWN	TRUSHAR	07/22/08	ELECTRO	ONICS & T	ECHNOLOGY	INC CA 9160	5
	OLERANCE RACTIONAL			CHECKED				D	ASE F		
1	ANGULAR: ±	.5°	+.03	ENG APPR.					-		
1	THREE PLAC	E DECIMA	AL ±.010	MFG APPR.			1	SR		-3B SE	:R.
	INTERPRET O			Q.A.			SI7F	DWG.	NO		REV
Y	MATERIAL	1	Tŀ	HIRD ANGLE F	ROJECTION	l		-		~ <i>Г</i> 1 1	
=	FINISH			\square)		В	M	4906-l	J5.11	B1
-			WING	Ÿ	/		SCAL	E: 1:2	WEIGHT:	SHE	ET 3 OF 3
	2011010	3				2			•		
		5				2				1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vector:

M3926-2-55 W16-31-21B W16-31-31B W20-46-31B W30-86-46B W45-10-46B