





AC and Pulse Metallized Polypropylene Film Capacitors MKP/MKP Radial Potted Type



FEATURES

- 15 mm to 27.5 mm pitch
- Material categorization:
for definitions of compliance please see
www.vishay.com/doc?99912

APPLICATIONS

- Where steep pulses occur e.g. SMPS (switch mode power supplies)
- Motor control circuits



RoHS
COMPLIANT
HALOGEN
FREE
GREEN
(5-2008)


QUICK REFERENCE DATA	
Capacitance range (E24 series)	0.002 μ F to 0.68 μ F
Capacitance tolerance	$\pm 5\%$
Climatic testing class according to IEC 60068-1	55/085/56
Rated DC temperature	85 °C
Rated AC temperature	70 °C
Maximum application temperature	85 °C
Reference specifications	IEC 60384-17
Dielectric	Polypropylene film
Electrodes	Metallized film
Construction	Internal serial construction
Encapsulation	Flame retardant plastic case and epoxy resin (UL-class 94 V-0)
Leads	Tinned wire
Marking	C-value; tolerance; rated voltage; manufacturer's type designation; code for dielectric material; manufacturer's emblem; code for factory of origin; year and week of manufacture
Rated DC voltage	630 V _{DC} ; 1000 V _{DC} ; 1600 V _{DC} ; 2000 V _{DC}
Rated AC voltage	300 V _{AC} ; 400 V _{AC} ; 500 V _{AC} ; 600 V _{AC}
Rated peak-to-peak voltage	850 V; 1130 V; 1400 V; 1700 V
Performance grade	Grade 1 (long life)
Stability grade	Pitch 15 mm: grade 2 Pitch 22.5 mm and 27.5 mm: grade 1

Note

- For more detailed data and test requirements contact: dc-film@vishay.com



DIMENSIONS in millimeters

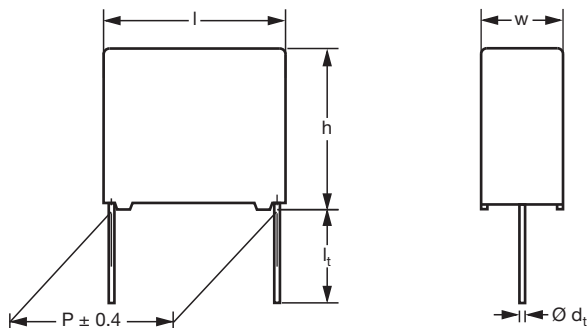

COMPOSITION OF CATALOG NUMBER

TYPE AND PITCHES	
378	15.0 mm
	22.5 mm
	27.5 mm

MULTIPLIER (nF)	
0.1	2
1	3
10	4

CAPACITANCE
(numerically)

Example:

$$104 = 10 \times 10 = 100 \text{ nF}$$

BFC2	378	XX	XX	X
2222*	378	XX	XX	X

* Old ordering code

TYPE	PACKAGING	LEAD CONFIGURATION	PREFERRED TYPES				
			C-TOL.	630 V	1000 V	1600 V	2000 V
380	Loose in box	Lead length 3.5 mm ± 0.3 mm	± 5 %	64	74	84	94
TYPE	PACKAGING	LEAD CONFIGURATION	ON REQUEST				
378	Loose in box	Lead length 5.0 mm ± 1.0 mm	± 5 %	62	72	82	92
	Taped on reel	H = 18.5 mm; P ₀ = 12.7 mm		65	75	85	95

SPECIFIC REFERENCE DATA - 630 V_{DC}

DESCRIPTION	VALUE	
Tangent of loss angle:	at 10 kHz	at 100 kHz
$C \leq 0.18 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 35 \times 10^{-4}$
$0.2 \mu\text{F} \leq C \leq 0.3 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 45 \times 10^{-4}$
$0.33 \mu\text{F} \leq C \leq 0.39 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 55 \times 10^{-4}$
$0.43 \mu\text{F} \leq C \leq 0.51 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 65 \times 10^{-4}$
$C > 0.51 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 75 \times 10^{-4}$
Rated voltage pulse slope (dU/dt) _R :	500 V/ μs	
P = 15 mm	370 V/ μs	
P = 22.5 mm	230 V/ μs (b < 15 mm)	
P = 27.5 mm	120 V/ μs (b $\geq$ 15 mm)	
P = 27.5 mm		
R between leads, for $C \leq 1 \mu\text{F}$; 500 V; 1 min	> 100 000 M Ω	
R between leads and case; 500 V; 1 min	> 100 000 M Ω	
Ionization (AC) voltage (typical value) at 50 pC peak discharge	> 400 V	
Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time $\leq$ 1000 V/s	1008 V; 1 min	
Withstanding (DC) voltage between leads and case	2840 V; 1 min	

Note

⁽¹⁾ See "Voltage Proof Test for Metalized Film Capacitors" www.vishay.com/doc?28169

ELECTRICAL DATA AND ORDERING CODE

U _{RDC} (V)	CAP. (μF)	DIMENSIONS w x h x l (mm)	MASS ⁽²⁾ (g)	CATALOG NUMBER BFC2 378 AND PACKAGING									
				LOOSE IN BOX		REEL ⁽¹⁾							
				I _t = 3.5 mm ± 0.3 mm	ALL LEADS	H = 18.5 mm; P ₀ = 12.7 mm							
				C-TOL. = ± 5 %									
				LAST 5 DIGITS OF CATALOG NUMBER	SPQ	SPQ							
630	PITCH = 15.0 mm ± 0.4 mm; d _t = 0.60 ± 0.06 mm; U _{RAC} = 300 V; U _{p-p} = 850 V												
	0.015 0.016 0.018 0.020 0.022	5.0 x 11.0 x 17.5	1.0	64153 64163 64183 64203 64223	1000	1100							
	0.024 0.027 0.030 0.033			1.4			64243 64273 64303 64333	1000	900				
	PITCH = 15.0 mm ± 0.4 mm; d _t = 0.80 ± 0.08 mm; U _{RAC} = 300 V; U _{p-p} = 850 V												
	0.036 0.039 0.043						6.0 x 12.0 x 17.5			1.8	64363 64393 64433	1000	800
	0.047										2.4		
	0.051	7.0 x 13.0 x 17.5	2.4		64513								
	PITCH = 22.5 mm ± 0.4 mm; d _t = 0.80 ± 0.08 mm; U _{RAC} = 300 V; U _{p-p} = 850 V												
	0.056 0.062	6.0 x 15.5 x 26.0	2.4	64563 64623	300	600							
	0.068 0.075 0.082 0.091			2.9			64683 64753 64823 64913	200	550				
	0.10		3.8		64104	200	450						
	0.11 0.12 0.13		7.0 x 16.5 x 26.0		3.8	64114 64124 64134	200			450			
	0.15 0.16 0.18			8.5 x 18.0 x 26.0		6.8		64154 64164 64184	200		350		



ELECTRICAL DATA AND ORDERING CODE						
U _{RDC} (V)	CAP. (μF)	DIMENSIONS w x h x l (mm)	MASS ⁽²⁾ (g)	CATALOG NUMBER BFC2 378 AND PACKAGING		
				LOOSE IN BOX		REEL ⁽¹⁾
				l _t = 3.5 mm ± 0.3 mm	ALL LEADS	H = 18.5 mm; P ₀ = 12.7 mm
				C-TOL. = ± 5 %		
				LAST 5 DIGITS OF CATALOG NUMBER	SPQ	SPQ
630	PITCH = 27.5 mm ± 0.4 mm; d _t = 0.80 ± 0.08 mm; U _{RAC} = 300 V; U _{p-p} = 850 V					
	0.20	9.0 x 19.0 x 31.5	7.4	64204	100	
	0.22			64224		
	0.24			64244		
	0.27			64274		
	0.30	11.0 x 21.0 x 31.0	9.2	64304	100	
	0.33			64334		
	0.36			64364		
	0.39			64394		
	0.43	13.0 x 23.0 x 31.0	12.3	64434	100	
	0.47			64474		
	0.51			64514		
	0.56	15.0 x 25.0 x 31.5	16.1	64564	100	
	0.62			64624		
	0.68			64684		

Notes

- (1) H = in-tape height; P₀ = sprocket hole distance; for detailed specifications refer to packaging information
 (2) Weight for short lead product only
 • SPQ = Standard Packing Quantity

SPECIFIC REFERENCE DATA - 1000 V _{DC}		
DESCRIPTION	VALUE	
Tangent of loss angle:	at 10 kHz	at 100 kHz
C ≤ 0.051 μF	≤ 10 x 10 ⁻⁴	≤ 20 x 10 ⁻⁴
0.056 μF ≤ C ≤ 0.22 μF	≤ 10 x 10 ⁻⁴	≤ 25 x 10 ⁻⁴
Rated voltage pulse slope (dU/dt) _R :		
P = 15 mm	1300 V/μs	
P = 22.5 mm	1200 V/μs	
P = 27.5 mm	600 V/μs (b < 15 mm)	
P = 27.5 mm	300 V/μs (b ≥ 15 mm)	
R between leads, for C ≤ 1 μF; 500 V; 1 min	> 100 000 MΩ	
R between leads and case; 500 V; 1 min	> 100 000 MΩ	
Ionization (AC) voltage (typical value) at 50 pC peak discharge	> 500 V	
Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time ≤ 1000 V/s	1600 V; 1 min	
Withstanding (DC) voltage between leads and case	2840 V; 1 min	

Note

- (1) See "Voltage Proof Test for Metalized Film Capacitors" www.vishay.com/doc?28169



ELECTRICAL DATA AND ORDERING CODE													
U _{RDC} (V)	CAP. (μF)	DIMENSIONS w x h x l (mm)	MASS ⁽²⁾ (g)	CATALOG NUMBER BFC2 378 AND PACKAGING									
				LOOSE IN BOX		REEL ⁽¹⁾							
				I _t = 3.5 mm ± 0.3 mm	ALL LEADS	H = 18.5 mm; P ₀ = 12.7 mm							
				C-TOL. = ± 5 %									
				LAST 5 DIGITS OF CATALOG NUMBER	SPQ	SPQ							
1000	PITCH = 15.0 mm ± 0.4 mm; d _t = 0.60 ± 0.06 mm; U _{RAC} = 300 V; U _{p-p} = 1130 V												
	0.0030 0.0033 0.0036 0.0039 0.0043 0.0047 0.0051 0.0056 0.0062 0.0068 0.0075	5.0 x 11.0 x 17.5	1.0	74302 74332 74362 74392 74432 74472 74512 74562 74622 74682 74752	1000	1100							
	0.0082 0.0091			74822 74912			1000	900					
	0.010 0.011			74103 74113									
	PITCH = 22.5 mm ± 0.4 mm; d _t = 0.80 ± 0.08 mm; U _{RAC} = 300 V; U _{p-p} = 1130 V												
	0.012 0.013 0.015 0.016 0.018			6.0 x 15.5 x 26.0			2.4	74123 74133 74153 74163 74183	300	600			
	0.020 0.022 0.024							2.9			74203 74223 74243	200	550
	0.027 0.030										3.8		
	0.033 0.036						7.0 x 16.5 x 26.0	74333 74363	200	350			
	0.039 0.043										6.8	74393 74433	
	0.047 0.051							74473 74513					
	PITCH = 27.5 mm ± 0.4 mm; d _t = 0.80 ± 0.08 mm; U _{RAC} = 300 V; U _{p-p} = 1130 V												
	0.056 0.062 0.068 0.075	9.0 x 19.0 x 31.5	7.4		74563 74623 74683 74753	100							
	0.082				74823								
	0.091 0.10 0.11	11.0 x 21.0 x 31.5	9.2		74913 74104 74114	100							
	0.12				74124								
	0.13 0.15 0.16	13.0 x 23.0 x 31.0	12.3	74134 74154	100								
	0.18 0.20			15.0 x 25.0 x 31.5		16.1		74164 74184 74204	100				
	0.22	18.0 x 28.0 x 31.5	74224										

Notes

(1) H = in-tape height; P₀ = sprocket hole distance; for detailed specifications refer to packaging information

(2) Weight for short lead product only

- SPQ = Standard Packing Quantity

SPECIFIC REFERENCE DATA - 1600 V_{DC}

DESCRIPTION	VALUE	
Tangent of loss angle: C ≤ 0.022 μF 0.024 μF ≤ C ≤ 0.1 μF	at 10 kHz ≤ 10 × 10 ⁻⁴ ≤ 10 × 10 ⁻⁴	at 100 kHz ≤ 15 × 10 ⁻⁴ ≤ 20 × 10 ⁻⁴
Rated voltage pulse slope (dU/dt) _R : P = 22.5 mm P = 27.5 mm P = 27.5 mm	1600 V/μs 900 V/μs (b < 15 mm) 450 V/μs (b ≥ 15 mm)	
R between leads, for C ≤ 1 μF; 500 V; 1 min	> 100 000 MΩ	
R between leads and case; 500 V; 1 min	> 100 000 MΩ	
Ionization (AC) voltage (typical value) at 20 pC peak discharge	> 600 V	
Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time ≤ 1000 V/s	2560 V; 1 min	
Withstanding (DC) voltage between leads and case	2840 V; 1 min	

Note

⁽¹⁾ See "Voltage Proof Test for Metalized Film Capacitors" www.vishay.com/doc?28169

ELECTRICAL DATA AND ORDERING CODE

U _{RDC} (V)	CAP. (μF)	DIMENSIONS w x h x l (mm)	MASS ⁽²⁾ (g)	CATALOG NUMBER BFC2 378 AND PACKAGING		
				LOOSE IN BOX		REEL ⁽¹⁾
				I _t = 3.5 mm ± 0.3 mm	ALL LEADS	H = 18.5 mm; P ₀ = 12.7 mm
				C-TOL. = ± 5 %		
				LAST 5 DIGITS OF CATALOG NUMBER	SPQ	SPQ
1600	PITCH = 22.5 mm ± 0.4 mm; d _t = 0.80 ± 0.08 mm; U _{RAC} = 500 V; U _{p-p} = 1400 V					
	0.0056 0.0062 0.0068	6.0 x 15.5 x 26.0	2.4	84562 84622 84682	300	600
	0.0075 0.0082 0.0091 0.010		2.9	84752 84822 84912 84103	200	550
	0.011 0.012 0.013 0.015 0.016		3.8	84113 84123 84133 84153 84163	200	450
	0.018 0.020 0.022		6.8	84183 84203 84223	200	350
	PITCH = 27.5 mm ± 0.4 mm; d _t = 0.80 ± 0.08 mm; U _{RAC} = 500 V; U _{p-p} = 1400 V					
	0.024 0.027 0.030 0.033 0.036	9.0 x 19.0 x 31.5	7.4	84243 84273 84303 84333 84363	100	
	0.039 0.043		9.2	84393 84433 84473 84513	100	
	0.047 0.051	11.0 x 21.0 x 31.0		12.3	84563 84623 84683	
	0.056 0.062 0.068		13.0 x 23.0 x 31.0		16.1	
	0.075 0.082 0.091	84104				
	0.10	15.0 x 25.0 x 31.5				

Notes

⁽¹⁾ H = in-tape height; P₀ = sprocket hole distance; for detailed specifications refer to packaging information

⁽²⁾ Weight for short lead product only

- SPQ = Standard Packing Quantity

SPECIFIC REFERENCE DATA - 2000 V_{DC}

DESCRIPTION	VALUE	
Tangent of loss angle: $C \leq 0.051 \mu\text{F}$	at 10 kHz $\leq 10 \times 10^{-4}$	at 100 kHz $\leq 15 \times 10^{-4}$
Rated voltage pulse slope (dU/dt) _R : P = 22.5 mm P = 27.5 mm P = 27.5 mm	2000 V/ μs 1200 V/ μs (b < 15 mm) 600 V/ μs (b $\geq$ 15 mm)	
R between leads, for $C \leq 1 \mu\text{F}$; 500 V; 1 min	> 100 000 M Ω	
R between leads and case; 500 V; 1 min	> 100 000 M Ω	
Ionization (AC) voltage (typical value) at 20 pC peak discharge	> 600 V	
Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time $\leq 1000 \text{ V/s}$	3200 V; 1 min	
Withstanding (DC) voltage between leads and case	2840 V; 1 min	

Note

(1) See "Voltage Proof Test for Metalized Film Capacitors" www.vishay.com/doc?28169

ELECTRICAL DATA AND ORDERING CODE

U _{RDC} (V)	CAP. (μF)	DIMENSIONS w x h x l (mm)	MASS ⁽²⁾ (g)	CATALOG NUMBER BFC2 378 AND PACKAGING			
				LOOSE IN BOX		REEL ⁽¹⁾	
				I _t = 3.5 mm ± 0.3 mm	ALL LEADS	H = 18.5 mm; P ₀ = 12.7 mm	
				C-TOL. = ± 5 %			
				LAST 5 DIGITS OF CATALOG NUMBER	SPQ	SPQ	
2000	PITCH = 22.5 mm ± 0.4 mm; d _t = 0.80 ± 0.08 mm; U _{RAC} = 600 V; U _{p-p} = 1700 V						
	0.0033 0.0036	6.0 x 12.0 x 26.0	2.4	94332 94362	300	600	
	0.0039 0.0043 0.0047 0.0051		2.9	94392 94432 94472 94512	200	550	
	0.0056		3.8	94562	200	450	
	0.0062 0.0068 0.0075			7.0 x 16.5 x 26.0			94622 94682 94752
	0.0082			8.5 x 18.0 x 26.0			94822
	0.0091 0.010 0.011	6.8	94912 94103 94113		200	350	
	0.012	10.0 x 19.5 x 26.0	94123				
	PITCH = 27.5 mm ± 0.4 mm; d _t = 0.80 ± 0.08 mm; U _{RAC} = 600 V; U _{p-p} = 1700 V						
	0.013 0.015 0.016	9.0 x 19.0 x 31.5	7.4	94133 94153 94163	100		
	0.018 0.020	11.0 x 21.0 x 31.0		94183 94203			
	0.022 0.024		9.2	94223 94243	100		
	0.027			13.0 x 23.0 x 31.0			94273
	0.030 0.033 0.036	12.3	94303 94333 94363		100		
	0.039 0.043 0.047	15.0 x 25.0 x 31.5	16.1		94393 94433 94473		100
	0.051	18.0 x 28.0 x 31.5		94513			





Notes

(1) H = in-tape height; P₀ = sprocket hole distance; for detailed specifications refer to packaging information


(2) Weight for short lead product only

- SPQ = Standard Packing Quantity


MAXIMUM RMS VOLTAGE (SINEWAVE) AS A FUNCTION OF FREQUENCY

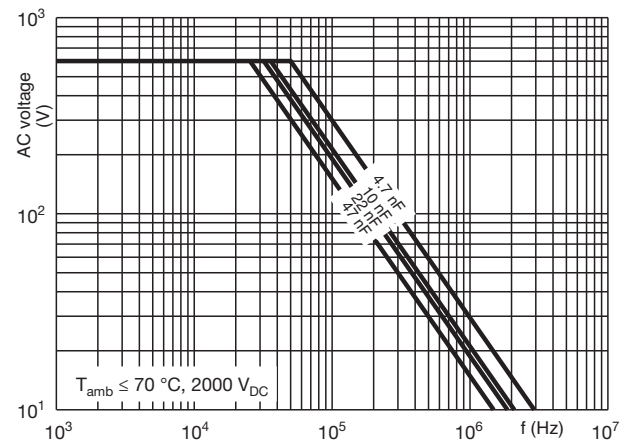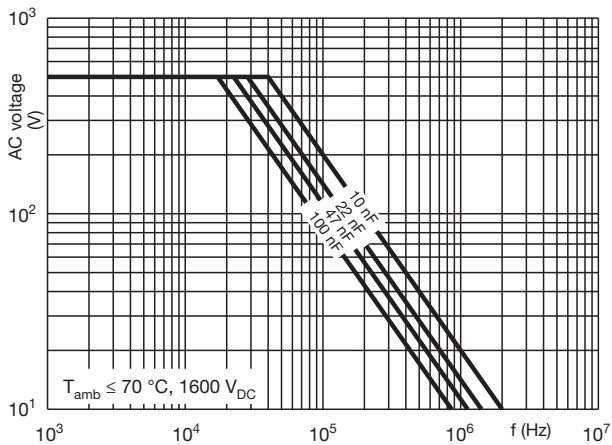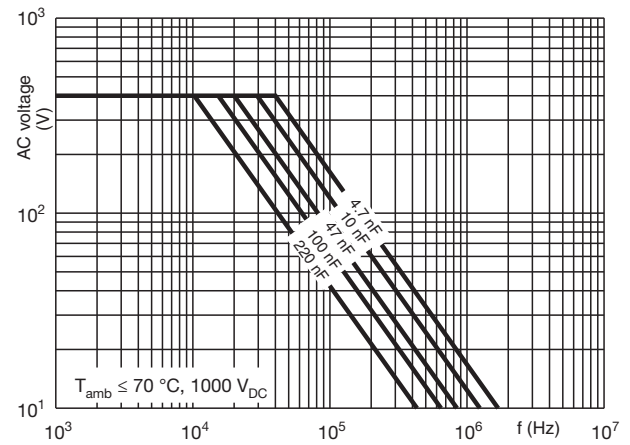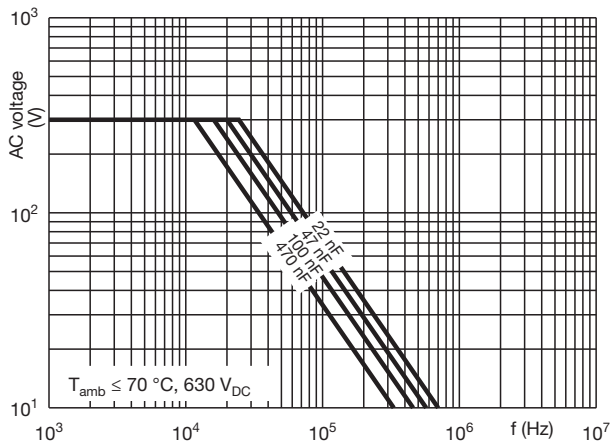

CAPACITANCE

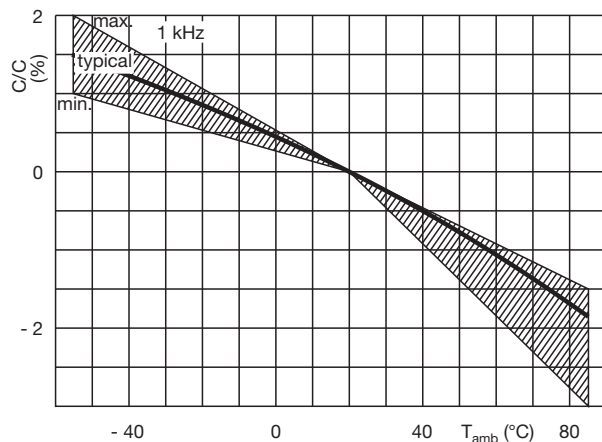

IMPEDANCE

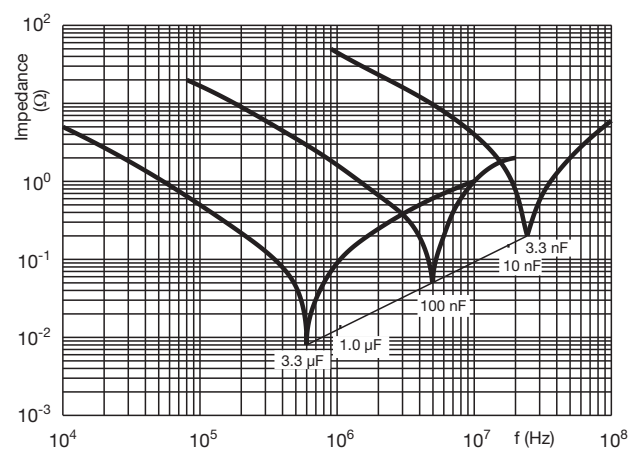



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

<u>BFC237864104</u>	<u>BFC237872224</u>	<u>BFC237874333</u>	<u>BFC237862114</u>	<u>BFC237862134</u>	<u>BFC237862153</u>	<u>BFC237862154</u>
<u>BFC237862163</u>	<u>BFC237862164</u>	<u>BFC237862183</u>	<u>BFC237862203</u>	<u>BFC237862204</u>	<u>BFC237862223</u>	<u>BFC237862224</u>
<u>BFC237862243</u>	<u>BFC237862244</u>	<u>BFC237862273</u>	<u>BFC237862303</u>	<u>BFC237862304</u>	<u>BFC237862333</u>	<u>BFC237862334</u>
<u>BFC237862363</u>	<u>BFC237862364</u>	<u>BFC237862393</u>	<u>BFC237862394</u>	<u>BFC237862433</u>	<u>BFC237862473</u>	<u>BFC237862474</u>
<u>BFC237862513</u>	<u>BFC237862514</u>	<u>BFC237862564</u>	<u>BFC237862624</u>	<u>BFC237862683</u>	<u>BFC237862684</u>	<u>BFC237862753</u>
<u>BFC237862823</u>	<u>BFC237862913</u>	<u>BFC237864114</u>	<u>BFC237864124</u>	<u>BFC237864134</u>	<u>BFC237864153</u>	<u>BFC237864154</u>
<u>BFC237864163</u>	<u>BFC237864164</u>	<u>BFC237864184</u>	<u>BFC237864203</u>	<u>BFC237864204</u>	<u>BFC237864223</u>	<u>BFC237864224</u>
<u>BFC237864243</u>	<u>BFC237864244</u>	<u>BFC237864273</u>	<u>BFC237864274</u>	<u>BFC237864303</u>	<u>BFC237864304</u>	<u>BFC237864333</u>
<u>BFC237864363</u>	<u>BFC237864364</u>	<u>BFC237864393</u>	<u>BFC237864394</u>	<u>BFC237864433</u>	<u>BFC237864434</u>	<u>BFC237864473</u>
<u>BFC237864474</u>	<u>BFC237864513</u>	<u>BFC237864514</u>	<u>BFC237864564</u>	<u>BFC237864623</u>	<u>BFC237864624</u>	<u>BFC237864683</u>
<u>BFC237864684</u>	<u>BFC237864753</u>	<u>BFC237864823</u>	<u>BFC237864913</u>	<u>BFC237865104</u>	<u>BFC237865114</u>	<u>BFC237865124</u>
<u>BFC237865134</u>	<u>BFC237865153</u>	<u>BFC237865154</u>	<u>BFC237865163</u>	<u>BFC237865164</u>	<u>BFC237865183</u>	<u>BFC237865184</u>
<u>BFC237865203</u>	<u>BFC237865223</u>	<u>BFC237865243</u>	<u>BFC237865273</u>	<u>BFC237865303</u>	<u>BFC237865333</u>	<u>BFC237865363</u>
<u>BFC237865393</u>	<u>BFC237865433</u>	<u>BFC237865473</u>	<u>BFC237865513</u>	<u>BFC237865683</u>	<u>BFC237865753</u>	<u>BFC237865823</u>
<u>BFC237865913</u>	<u>BFC237872103</u>					