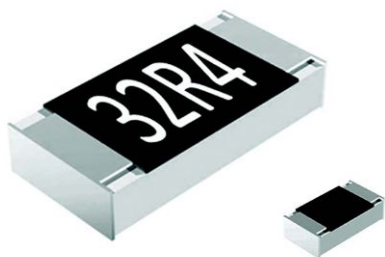


Green Thick Film Chip Resistors



FEATURES

- Green resistor - does not use RoHS exemptions
- Stability $\Delta R/R = 1\%$ for 1000 h at 70 °C
- 2 mm pitch packaging option for 0603 size
- Material categorization:
for definitions of compliance please see
www.vishay.com/doc?99912



STANDARD ELECTRICAL SPECIFICATIONS

TYPE	CASE SIZE IMPERIAL	CASE SIZE METRIC	POWER RATING P_{70} W	LIMITING ELEMENT VOLTAGE $U_{max.}$ AC_{RMS}/DC V	TEMPERATURE COEFFICIENT \pm ppm/K	TOLERANCE \pm %	RESISTANCE RANGE Ω	SERIES
RCG0402	0402	RR1005M	0.063	50	100	0.5, 1	150 to 10M	E24; E96
					150		1.0 to 147	
					200	5	1.0 to 10M	E24
					Zero-Ohm-Resistor: $R_{max.} = 20\text{ m}\Omega$, $I_{max.} = 1.5\text{ A}$			
RCG0603	0603	RR1608M	0.1	75	100	0.5, 1	1.0 to 10M	E24; E96
					200			
						5		E24
					Zero-Ohm-Resistor: $R_{max.} = 20\text{ m}\Omega$, $I_{max.} = 2.0\text{ A}$			
RCG0805	0805	RR2012M	0.125	150	100	0.5, 1	1.0 to 10M	E24; E96
					200			
						5		E24
					Zero-Ohm-Resistor: $R_{max.} = 20\text{ m}\Omega$, $I_{max.} = 2.5\text{ A}$			
RCG1206	1206	RR3216M	0.25	200	100	0.5, 1	1.0 to 10M	E24; E96
					200			
						5		E24
					Zero-Ohm-Resistor: $R_{max.} = 20\text{ m}\Omega$, $I_{max.} = 3.5\text{ A}$			

Notes

- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.
- Marking: See datasheet "Surface Mount Resistor Marking" (document number 20020).
- Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material.

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	RCG0402	RCG0603	RCG0805	RCG1206
Rated dissipation P_{70} ⁽¹⁾	W	0.063	0.1	0.125	0.25
Operating voltage $U_{max.}$ AC_{RMS}/DC	V	50	75	150	200
Insulation voltage U_{ins} (1 min)	V	75	100	200	300
Insulation resistance	Ω	$> 10^9$			
Operating temperature range	°C	- 55 to + 155			
Mass	mg	0.65	2	5.5	10

Note

- ⁽¹⁾ The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature of 155 °C is not exceeded.

**PART NUMBER AND PRODUCT DESCRIPTION**

PART NUMBER: RCG080510K0FKEA

R	C	G	0	8	0	5	1	0	K	0	F	K	E	A
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

TYPE
RCG0402
RCG0603
RCG0805
RCG1206

VALUE
R = Decimal
K = Thousand
M = Million
0000 = 0 Ω Jumper

TOLERANCE
D = $\pm 0.5\%$
F = $\pm 1.0\%$
J = $\pm 5.0\%$
Z = Jumper

TCR
K = ± 100 ppm/K
L = ± 150 ppm/K
N = ± 200 ppm/K
0 = Jumper

PACKAGING
EA, EB, EC, ED, EE, EI, EL

PRODUCT DESCRIPTION: RCG0805 100 10K 1 % EA

RCG0805
TYPE
RCG0402
RCG0603
RCG0805
RCG1206

100
TCR
± 100 ppm/K
± 150 ppm/K
± 200 ppm/K


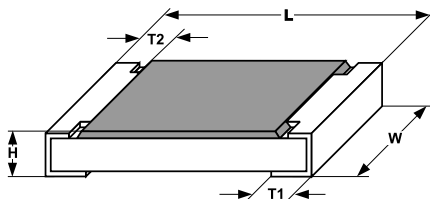
10K
RESISTANCE VALUE
10R = 10 Ω
10K = 10 k Ω
1M = 1 M Ω
0R0 = Jumper

1 %
TOLERANCE
$\pm 0.5\%$
$\pm 1\%$
$\pm 5\%$

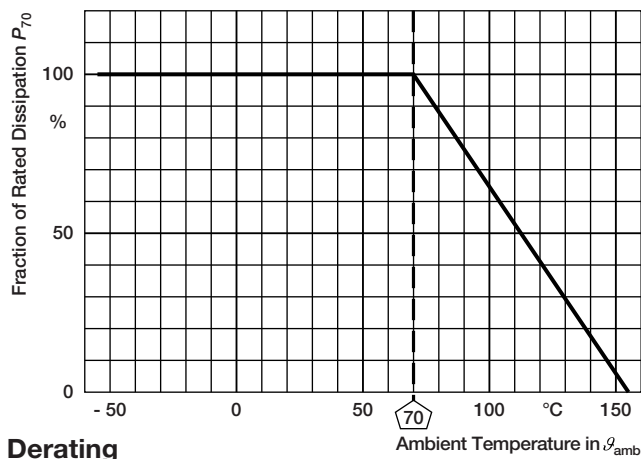
EA
PACKAGING
EA, EB, EC, ED, EE, EI, EL

PACKAGING

TYPE	CODE	QUANTITY	CARRIER TAPE	WIDTH	PITCH	REEL DIAMETER
RCG0402	ED	10 000	Paper tape acc. to IEC 60286-3 Type 1a	8 mm	2 mm	180 mm/7"
	EE	50 000				330 mm/13"
RCG0603	EI	5000	Paper tape acc. to IEC 60268-3 Type 1a	8 mm	2 mm	180 mm/7"
	ED	10 000				180 mm/7"
	EL	20 000				285 mm/11.25"
	EE	50 000				330 mm/13"
	EA	5000	Paper tape acc. to IEC 60268-3 Type 1a	8 mm	4 mm	180 mm/7"
	EB	10 000				285 mm/11.25"
	EC	20 000				330 mm/13"
RCG0805	EA	5000	Paper tape acc. to IEC 60268-3 Type 1a	8 mm	4 mm	180 mm/7"
	EB	10 000				285 mm/11.25"
	EC	20 000				330 mm/13"
RCG1206	EA	5000	Paper tape acc. to IEC 60268-3 Type 1a	8 mm	4 mm	180 mm/7"
	EB	10 000				285 mm/11.25"
	EC	20 000				330 mm/13"

DIMENSIONS in millimeters


SIZE		DIMENSIONS					SOLDER PAD DIMENSIONS					
							REFLOW SOLDERING			WAVE SOLDERING		
IMPERIAL	METRIC	L	W	H	T1	T2	a	b	l	a	b	l
0402	RR1005M	1.0 ± 0.05	0.5 ± 0.05	0.35 ± 0.05	0.25 ± 0.05	0.2 ± 0.1	0.4	0.6	0.5			
0603	RR1608M	1.55 ^{+0.10} _{-0.05}	0.85 ± 0.1	0.45 ± 0.05	0.3 ± 0.2	0.3 ± 0.2	0.5	0.9	1.0	0.9	0.9	1.0
0805	RR2012M	2.0 ^{+0.20} _{-0.10}	1.25 ± 0.15	0.45 ± 0.05	0.3 ^{+0.20} _{-0.10}	0.3 ± 0.2	0.7	1.3	1.2	0.9	1.3	1.3
1206	RR3216M	3.2 ^{+0.10} _{-0.20}	1.6 ± 0.15	0.55 ± 0.05	0.45 ± 0.2	0.4 ± 0.2	0.9	1.7	2.0	1.1	1.7	2.3

FUNCTIONAL PERFORMANCE

GREEN REQUIREMENTS

SUBSTANCES	CONCENTRATION LIMIT
Lead (Pb)	< 1000 ppm
Mercury (Hg)	< 1000 ppm
Cadmium (Cd)	< 100 ppm
Hexavalent Chromium	< 1000 ppm
Polybrominated Biphenyl (PBB)	< 1000 ppm
Polybrominated Diphenyl Ether (PBDE)	< 1000 ppm
Bromine (Br)	< 900 ppm
Chlorine (Cl)	< 900 ppm
Sum of Bromine and Chlorine	≤ 1500 ppm max.
Antimony (Sb)	< 900 ppm
Red Phosphorous	< 100 ppm

Notes

- No exemptions (e.g. Pb in glass) may be applied to any substances or application for the “Green” category
- All concentration levels are based on homogenous materials



TEST PROCEDURES AND REQUIREMENTS					
EN 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE (ΔR)	
			Stability for product types:	STABILITY CLASS 1 OR BETTER	STABILITY CLASS 2 OR BETTER
			RCG e3	1 Ω to 10 M Ω	1 Ω to 10 M Ω
4.5	-	Resistance	-	$\pm 0.5 \%$, $\pm 1 \%$	$\pm 5 \%$
4.7	-	Voltage proof	$U = 1.4 \times U_{ins}$; 60 s	No flashover or breakdown	
4.13	-	Short time overload	$U = 2.5 \times \sqrt{P_{70} \times R} \leq 2 \times U_{max.}$; Duration acc. to style	$\pm (0.25 \% R + 0.05 \Omega)$	$\pm (0.5 \% R + 0.05 \Omega)$
4.17.2	58 (Td)	Solderability	Solder bath method; Sn96.5Ag3Cu0.5 non-activated flux; (245 \pm 5) $^{\circ}\text{C}$ (3 \pm 0.3) s	Good tinning ($\geq 95 \%$ covered) no visible damage	
4.8.4.2	-	Temperature coefficient	(20/- 55/20) $^{\circ}\text{C}$ and (20/125/20) $^{\circ}\text{C}$	$\pm 100 \text{ ppm/K}$, $\pm 150 \text{ ppm/K}$	$\pm 200 \text{ ppm/K}$
4.32	21 (U_{u3})	Shear (adhesion)	RR 1608 and smaller: 9 N RR 2012 and larger: 45 N	No visible damage	
4.33	21 (U_{u1})	Substrate bending	Depth 2 mm; 3 times	No visible damage, no open circuit in bent position	
				$\pm (0.25 \% R + 0.05 \Omega)$	$\pm (0.5 \% R + 0.05 \Omega)$
4.23	-	Climatic sequence:	-	$\pm (1 \% R + 0.05 \Omega)$	$\pm (2 \% R + 0.1 \Omega)$
4.23.2	2 (Ba)	Dry heat	125 $^{\circ}\text{C}$; 16 h		
4.23.3	30 (Db)	Damp heat, cyclic	55 $^{\circ}\text{C}$; $\geq 90 \%$ RH; 24 h; 1 cycle		
4.23.4	1 (Aa)	Cold	- 55 $^{\circ}\text{C}$; 2 h		
4.23.5	13 (M)	Low air pressure	1 kPa; (25 \pm 10) $^{\circ}\text{C}$; 1 h		
4.23.6	30 (Db)	Damp heat, cyclic	55 $^{\circ}\text{C}$; $\geq 90 \%$ RH; 24 h; 5 cycles		
4.23.7	-	DC load	$U = \sqrt{P_{70} \times R}$	$\pm (1 \% R + 0.05 \Omega)$	$\pm (2 \% R + 0.1 \Omega)$
4.25.1	-	Endurance at 70 $^{\circ}\text{C}$	$U = \sqrt{P_{70} \times R} \leq U_{max.}$; 1.5 h on; 0.5 h off; 70 $^{\circ}\text{C}$; 1000 h		
4.18.2	58 (Td)	Resistance to soldering heat	Solder bath method (260 \pm 5) $^{\circ}\text{C}$; (10 \pm 1) s	$\pm (0.25 \% R + 0.05 \Omega)$	$\pm (0.5 \% R + 0.05 \Omega)$
4.35	-	Flamability, needle flame test	IEC 60695-11-5; 10 s	No burning after 30 s	
4.24	78 (Cab)	Damp heat, steady state	(40 \pm 2) $^{\circ}\text{C}$; (93 \pm 3) % RH; 56 days	$\pm (1 \% R + 0.05 \Omega)$	$\pm (1 \% R + 0.1 \Omega)$
4.25.3	-	Endurance at upper category temperature	155 $^{\circ}\text{C}$, 1000 h	$\pm (1 \% R + 0.05 \Omega)$	$\pm (2 \% R + 0.1 \Omega)$
4.40	-	Electrostatic discharge (human body model)	IEC 61340-3-1; 3 pos. + 3 neg. discharges; ESD test voltage acc. to size	$\pm (1 \% R + 0.05 \Omega)$	

TEST PROCEDURES AND REQUIREMENTS					
EN 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE (ΔR)	
			Stability for product types:	STABILITY CLASS 1 OR BETTER	STABILITY CLASS 2 OR BETTER
			RCG e3	1 Ω to 10 M Ω	1 Ω to 10 M Ω
4.29	45 (XA)	Component solvent resistance	Isopropyl alcohol; 50 °C; method 2	No visible damage	
4.30	45 (XA)	Solvent resistance of marking	Isopropyl alcohol; 50 °C; method 1, toothbrush	Marking legible, no visible damage	
4.22	6 (Fc)	Vibration, endurance by sweeping	f = 10 Hz to 2000 Hz; x, y, z \leq 1.5 mm; A \leq 200 m/s ² ; 10 sweeps per axis	$\pm (0.25 \% R + 0.05 \Omega)$	$\pm (0.5 \% R + 0.05 \Omega)$
4.37	-	Periodic electric overload	$U = \sqrt{15 \times P_{70} \times R}$ $\leq 2 \times U_{\max.}$; 0.1 s on; 2.5 s off; 1000 cycles	$\pm (1 \% R + 0.05 \Omega)$	
4.27	-	Single pulse high voltage overload, 10 μ s/700 μ s	$\dot{U} = 10 \times \sqrt{P_{70} \times R}$ $\leq 2 \times U_{\max.}$; 10 pulses	$\pm (1 \% R + 0.05 \Omega)$	

All tests are carried out in accordance with the following specifications:

- EN 60115-1, generic specification
- EN 140400, sectional specification
- EN 140401-802, detail specification
- IEC 60068-2, environmental test procedures

Packaging of components is done in paper tapes according to IEC 60286-3.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

RCG06030000Z0EA	RCG060310R0FKEA	RCG0603100RFKEA	RCG06031K00FKEA	RCG060310K0FKEA
RCG0603100KFKEA	RCG06031M00FKEA	RCG08050000Z0EA	RCG080510R0FKEA	RCG0805100RFKEA
RCG08051K00FKEA	RCG080510K0FKEA	RCG0805100KFKEA	RCG08051M00FKEA	RCG12060000Z0EA
RCG120610R0FKEA	RCG1206100RFKEA	RCG12061K00FKEA	RCG120610K0FKEA	RCG1206100KFKEA
RCG12061M00FKEA	RCG040210K0JNED	RCG04020000Z0ED	RCG04021K00FKED	RCG04021K00JNED
RCG04021K50FKED	RCG04021M00FKED	RCG04021M00JNED	RCG04022K00FKED	RCG040210K0FKED
RCG04022K20JNED	RCG040210R0JNED	RCG0402100KFKEA	RCG0402100KJNED	RCG040215K0FKED
RCG0402100RJNED	RCG04021R00JNED	RCG040233K0JNED	RCG04022R20JNED	RCG12061K50FKEA
RCG0805100RJNEA	RCG0805499RFKEA	RCG0402220RJNED	RCG08057K50JNEA	RCG080575K0JNEA
RCG0805470RJNEA	RCG12061K00JNEA	RCG0805470KJNEA	RCG12061M00JNEA	RCG12061R00FKEA
RCG12061R00JNEA	RCG120610K0JNEA	RCG0805220RJNEA	RCG080515K0FKEA	RCG08052K00FKEA
RCG08052K20JNEA	RCG08052R20JNEA	RCG080520K0FKEA	RCG080522K0JNEA	RCG040220K0FKED
RCG0805220KJNEA	RCG1206100KJNEA	RCG08053K30JNEA	RCG080533K0JNEA	RCG08054K70JNEA
RCG08054K99FKEA	RCG08054R70JNEA	RCG080547K0JNEA	RCG080547R0JNEA	RCG080522R0JNEA
RCG1206470KJNEA	RCG1206470RJNEA	RCG120649K9FKEA	RCG1206499RFKEA	RCG12067K50JNEA
RCG120675K0JNEA	RCG120610R0JNEA	RCG12064R70JNEA	RCG120622R0JNEA	RCG080549K9FKEA
RCG1206100RJNEA	RCG120615K0FKEA	RCG12062K00FKEA	RCG12062K20JNEA	RCG12062R20JNEA
RCG120647R0JNEA	RCG120622K0JNEA	RCG120647K0JNEA	RCG1206220KJNEA	RCG1206220RJNEA
RCG12063K30JNEA	RCG120633K0JNEA	RCG12064K70JNEA	RCG12064K99FKEA	RCG120620K0FKEA
RCG060310R0JNEA	RCG06031K50FKEA	RCG06031M00JNEA	RCG06031R00FKEA	RCG06031R00JNEA