



High-Voltage Trench MOS Barrier Schottky Rectifier

Ultra Low $V_F = 0.540\text{ V}$ at $I_F = 5\text{ A}$



FEATURES

- Trench MOS Schottky Technology
- Low forward voltage drop, low power losses
- High efficiency operation
- Low thermal resistance
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



TYPICAL APPLICATIONS

For use in high frequency inverters, switching power supplies, free-wheeling diodes, oring diode, dc-to-dc converters and reverse battery protection.

MAJOR RATINGS AND CHARACTERISTICS

$I_{F(AV)}$	20 A
V_{RRM}	120 V
I_{FSM}	150 A
V_F at $I_F = 20\text{ A}$	0.770 V
T_j max.	150 °C

MECHANICAL DATA

Case: TO-220AB & ITO-220AB

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

Polarity: As marked

Mounting Torque: 10 in-lbs maximum

MAXIMUM RATINGS ($T_A = 25\text{ °C}$ unless otherwise noted)

PARAMETER	SYMBOL	V20120SG	VF20120SG	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	120		V
Maximum average forward rectified current (see Fig. 1)	$I_{F(AV)}$	20		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	150		A
Peak repetitive reverse current per leg at $t_p = 2\text{ }\mu\text{s}$, 1 kHz	I_{RRM}	1.0		A
Voltage rate of change (rated V_R)	dv/dt	10000		V/ μs
Isolation voltage (ITO-220AB only) From terminal to heatsink $t = 1\text{ minute}$	V_{AC}	1500		V
Operating junction temperature range	T_J	- 20 to + 150		°C
Storage temperature range	T_{STG}	- 40 to + 150		°C

ELECTRICAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)						
PARAMETER	TEST CONDITIONS		SYMBOL	TYP.	MAX.	UNIT
Breakdown voltage	at I _R = 1.0 mA T _j = 25 °C		V _(BR)	120 (minimum)	-	V
Instantaneous forward voltage ⁽¹⁾	at I _F = 5 A I _F = 10 A I _F = 20 A	T _j = 25 °C	V _F	0.611	-	
				0.767	-	
				1.110	1.23	
	at I _F = 5 A I _F = 10 A I _F = 20 A	T _j = 125 °C		0.540	-	
0.633				-		
0.770				0.80		
Reverse current ⁽¹⁾	at V _R = 90 V	T _j = 25 °C	I _R	11.5	-	μA
		T _j = 125 °C		5.0	-	mA
	at V _R = 120 V	T _j = 25 °C		55	250	μA
		T _j = 125 °C		12	25	mA

Note:

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

THERMAL CHARACTERISTICS ($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)				
PARAMETER	SYMBOL	V20120SG	VF20120SG	UNIT
Typical thermal resistance	$R_{\theta JC}$	2.2	4.2	$^{\circ}\text{C/W}$

ORDERING INFORMATION					
PACKAGE	PREFERRED P/N	UNIT WEIGHT (g)	PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
TO-220AB	V20120SG-E3/4W	1.876	4W	50/Tube	Tube
ITO-220AB	VF20120SG-E3/45	1.797	45	50/Tube	Tube

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

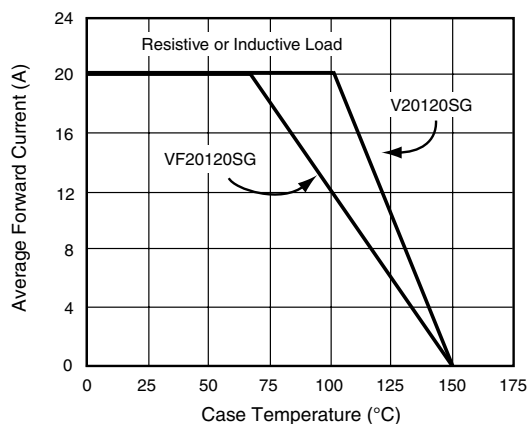


Figure 1. Maximum Forward Current Derating Curve

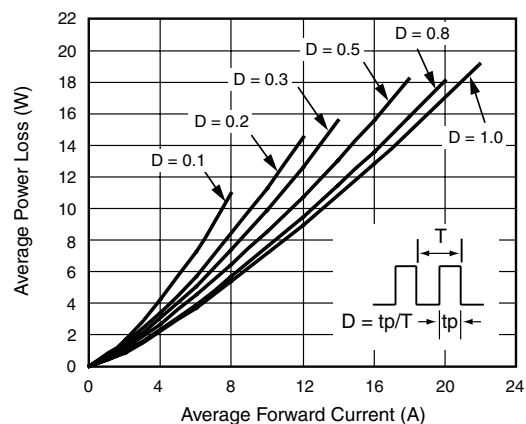


Figure 2. Forward Power Loss Characteristics

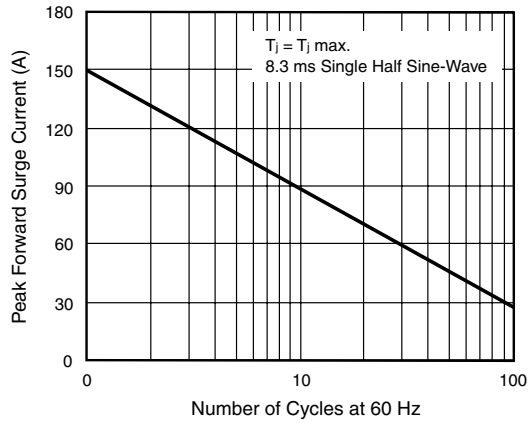


Figure 3. Maximum Non-Repetitive Peak Forward Surge Current

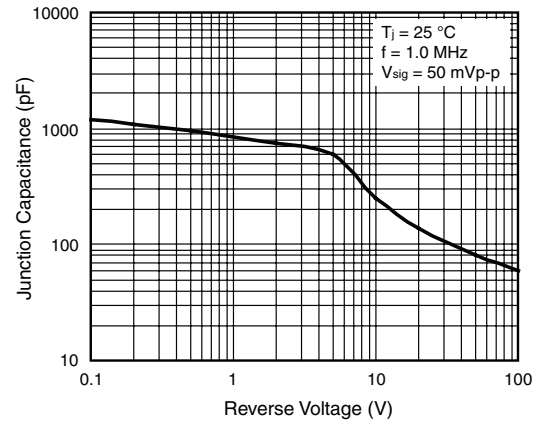


Figure 6. Typical Junction Capacitance

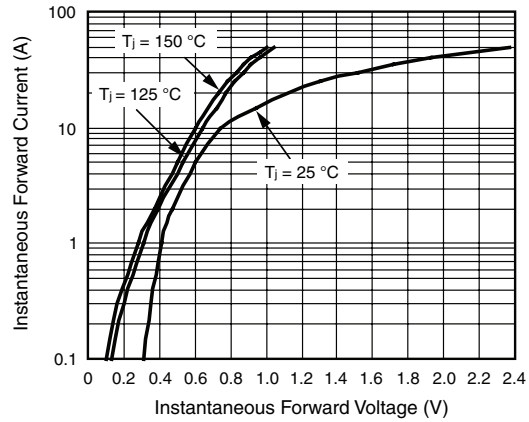


Figure 4. Typical Instantaneous Forward Characteristics

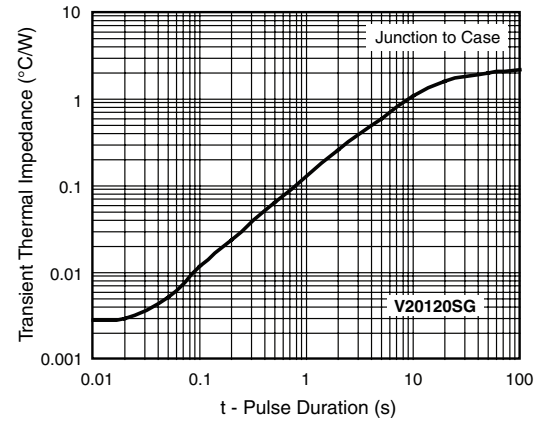


Figure 7. Typical Transient Thermal Impedance

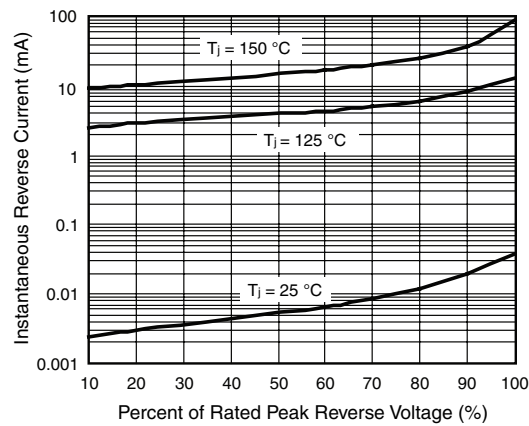


Figure 5. Typical Reverse Characteristics


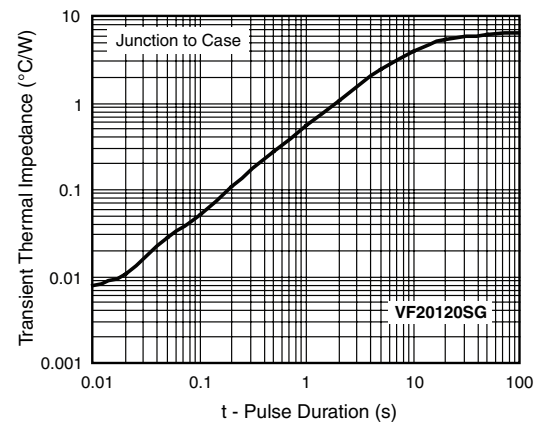



Figure 8. Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

TO-220AB

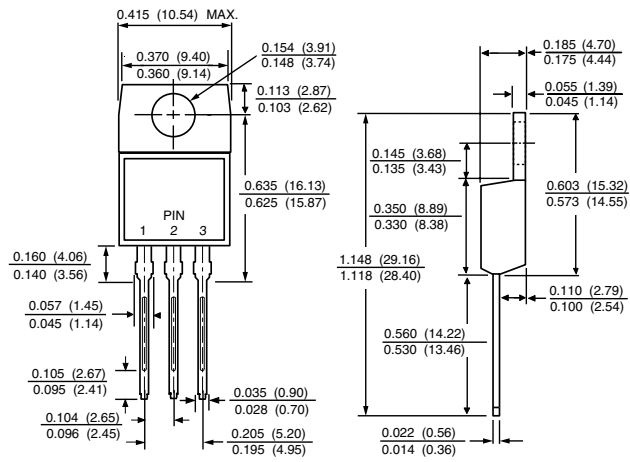

ITO-220AB

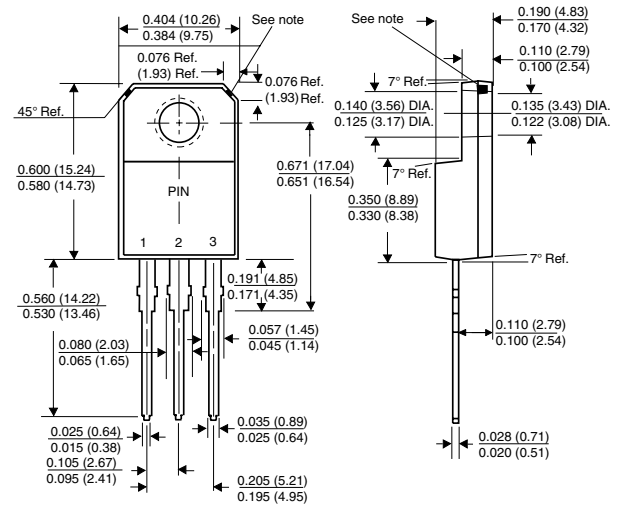

Note: Copper exposure is allowable for 0.005 (0.13) Max. from the body



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vishay:](#)

[VF20120SG-E3/45](#)