

Metal Film Leaded Resistors, Industrial, ± 1 % Tolerance

FEATURES

Dual power rating:
 P₇₀ = 0.25 W with 0.5 % stability
 P₇₀ = 0.50 W with 1.0 % stability




RoHS



- Superior electrical performance
- Flame retardant epoxy conformal coating (red brown color)
- Standard 5 band color code marking for ease of identification after mounting
- Tape and reel packaging for automatic insertion (52.4 mm inside tape spacing per EIA-296-E)
- Lead (Pb)-free solder contacts
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>


STANDAR	STANDARD ELECTRICAL SPECIFICATIONS						
PRODUCT	POWER RATING P ₇₀ W	LIMITING ELEMENT VOLTAGE MAX. V≅	TEMPERATURE COEFFICIENT ± ppm/K	TOLERANCE ± %	RESISTANCE RANGE Ω	E-SERIES	
CCF55	0.25	250	100	1	10 to 3.01M	E96	
CCF55	0.5	250	100	1	10 to 3.01M	E96	

TECHNICAL SPECIFICATIONS				
PARAMETER	UNIT	CCF55		
Rated Dissipation, P ₇₀	W	0.25/0.5		
Maximum Working Voltage, U _{max.}	V≅	≤ 250		
Insulation Voltage (1 min)	V _{eff}	500		
Dielectric Strength	V _{AC}	450		
Insulation Resistance	Ω	≥ 10 ¹¹		
Operating Temperature Range	°C	-65 to +165		
Terminal Strength (pull test)	lb	2		
Weight	g	0.35 max.		

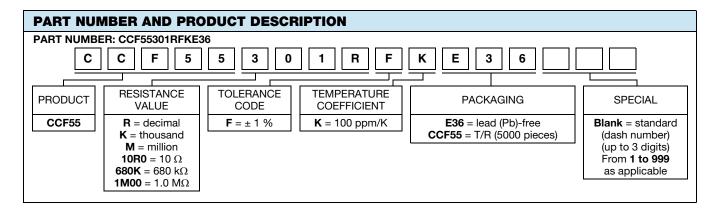




DIMENSIONS in inches (millimeters)



PRODUCT	Α	В	C (Max.)	D	E
CCF55	0.245 ± 0.020	0.090 ± 0.008	0.295	0.022 ± 0.002	1.100 ± 0.040
	(6.22 ± 0.51)	(2.29 ± 0.20)	(7.5)	(0.58 ± 0.05)	(27.94 ± 1.02)

	RESISTANCE VALUES Vishay CCF55 is available in the standard 96 resistance values per decade. Values are obtained from the following decade table by multiplying by powers of 10. As an example: 30.1 can represent 30.1 Ω , 301 Ω , 3.01 k Ω , 30.1 k Ω or 301 k Ω .					
	10.0	14.7	21.5	31.6	46.4	68.1
	10.2	15.0	22.1	32.4	47.5	69.8
	10.5	15.4	22.6	33.2	48.7	71.5
	10.7	15.8	23.2	34.0	49.9	73.2
	11.0	16.2	23.7	34.8	51.1	75.0
	11.3	16.5	24.3	35.7	52.3	76.8
	11.5	16.9	24.9	36.5	53.6	78.7
	11.8	17.4	25.5	37.4	54.9	80.6
	12.1	17.8	26.1	38.3	56.2	82.5
	12.4	18.2	26.7	39.2	57.6	84.5
	12.7	18.7	27.4	40.2	59.0	86.6
	13.0	19.1	28.0	41.2	60.4	88.7
	13.3	19.6	28.7	42.2	61.9	90.9
	13.7	20.0	29.4	43.2	63.4	93.1
	14.0	20.5	30.1	44.2	64.9	95.3
	14.3	21.0	30.9	45.3	66.5	97.6

DERATING

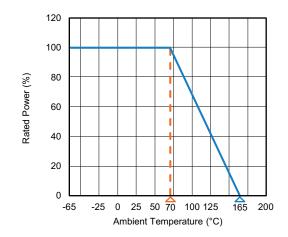

MARKING

The nominal resistance and tolerance are marked on the resistor using five colored bands in accordance with IEC 60062, marking codes for resistors and capacitors.

PERFORMANCE				
RATED DISSIPATION, P ₇₀				
CCF55	1/4 W	1/2 W		
TEST (1)	MAXIMUM ∆R	MAXIMUM ∆R		
Thermal Shock	± 0.5 %	-		
Short Time Overload	± 0.5 %	-		
Low Temperature Operation	± 0.5 %	-		
Moisture Resistance	± 1.5 %	-		
Resistance to Soldering Heat	± 0.5 %	-		
Shock/Bump	± 0.5 %	-		
Vibration	± 0.5 %	-		
Life	± 0.5 %	± 1.0 %		
Terminal Strength	± 0.2 %	-		
Dielectric Withstanding Voltage	± 0.5 %	-		

Note

⁽¹⁾ Test specifications as per IEC 60115-1



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

```
CCF555100FKR36 CCF55510RFKR36 CCF5516K9FKR36 CCF5571K5FKR36 CCF55357KFHR362
CCF551K91FKR36 CCF556K19FHR362 CCF5590R9FHR362 CCF5546K4FKR36 CCF5516K5FKR36
CCF55475KFHR362 CCF558K87FHR362 CCF55115RFHR362 CCF5553K6FHR362 CCF5563K4FKR36
CCF55221RFKR36 CCF55174RFHR362 CCF5528K0FHR362 CCF55133RFHR362 CCF55130RFHR362
CCF55191RFHR362 CCF55196RFHR362 CCF55137RFHR362 CCF55169KFKR36 CCF55118RFHR362
CCF55110RFHR362 CCF5520K0FHR362 CCF55113RFHR362 CCF5554K9FKR36 CCF551M13FKR36
CCF551K13FKR36 CCF5516R9FHR362 CCF55147KFHR362 CCF552K37FKR36 CCF5580R6FKR36
CCF551K18FKR36 CCF5547K5FHR362 CCF551K54FKR36 CCF55182KFHR362 CCF5518K2FKR36
CCF55909RFKR36 CCF55187KFHR362 CCF554K99FHR362 CCF55261KFHR362 CCF55267KFHR362
CCF5541K2FHR362 CCF555K76FKR36 CCF5514R7FHR362 CCF5533R2FKR36 CCF55412KFKR36
CCF552K55FKR36 CCF55102KFHR362 CCF5584R5FKR36 CCF5536R5FKR36 CCF55205KFKR36
CCF5512R7FKR36 CCF554K53FHR362 CCF5527R4FKR36 CCF5586R6FKR36 CCF55100KFHR362
CCF5530R9FKR36 CCF55162KFHR362 CCF55576KFKR36 CCF552K15FKR36 CCF55107RFKR36
CCF55432KFHR362 CCF552M26FKR36 CCF551K58FKR36 CCF55182RFKR36 CCF55100RFKR36
CCF5533R2FHR362 CCF55105RFKR36 CCF55162RFKR36 CCF55140RFKR36 CCF55150RFKR36
CCF55464KFKR36 CCF55174RFKR36 CCF551330FKFR36 CCF5521R5FKR36 CCF55115RFKR36
CCF552M21FKR36 CCF55196RFKR36 CCF55110RFKR36 CCF5528R7FHR362 CCF55383KFHR362
CCF5575R0FKR36 CCF5545K3FHR362 CCF551K47FKR36 CCF55301KFHR362 CCF553K48FHR362
CCF5546R4FHR362 CCF5523K7FHR362 CCF552M94FKR36 CCF5523K2FHR362 CCF552M00FKR36
CCF5595R3FHR362 CCF55732KFKR36 CCF552K00FKR36 CCF55866RFKR36 CCF55976KFKR36
```