



Thick Film Capacitor Networks, Single-In-Line, Conformal Coated SIP



FEATURES

- · Isolated and bussed schematics available
- X7R and C0G capacitors available
- Multiple isolated capacitors
- Multiple capacitors, common ground
- Custom design capability
- "D" 0.300" (7.62 mm) package height (maximum)
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912





RoHS*

HALOGEN FREE

Note

This datasheet provides information about parts that are RoHS-compliant and / or parts that are non RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details


STANDARD ELECTRICAL SPECIFICATIONS								
VISHAY DALE MODEL	PROFILE	SCHEMATIC	CAPACITANCE RANGE		CAPACITANCE TOLERANCE	CAPACITANCE VOLTAGE		
			C0G (1)	X7R	(-55 °C to +125 °C) ± %	at 85 °C V _{DC}		
CS201	D	1	33 pF to 3900 pF	470 pF to 0.1 μF	10, 20	50		
CS201	D	3	33 pF to 3900 pF	470 pF to 0.1 μF	10, 20	50		
CS201	D	4	33 pF to 3900 pF	470 pF to 0.1 μF	10, 20	50		

Note

(1) C0G capacitors may be substituted for X7R capacitors

TECHNICAL SPECIFICATIONS							
PARAMETER	UNIT	CS201					
PANAIVIETEN	UNIT	COG	X7R				
Temperature coefficient (-55 °C to +125 °C)	ppm/°C or %	± 30 ppm/°C	± 15 %				
Dissipation factor (maximum)	± %	0.15	2.5				

MATERIAL SPECIFICATIONS					
Marking resistance to solvents	Permanency testing per MIL-STD-202 method 215				
Solderability	Per MIL-STD-202, method 208E				
Body	High alumina, epoxy coated (flammability UL 94 V-0)				
Terminals	Phosphorus-bronze, solder plated				
Marking	Pin #1 identifier, Dale or D, part number (abbreviated as space allows), date code				

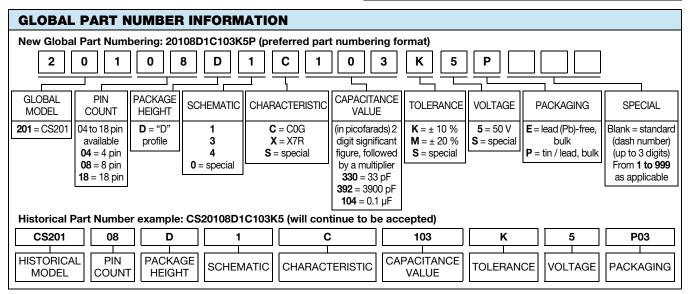


Note

Revision: 24-Jan-2019

For additional information on packaging, refer to the Through-hole Network Packaging document (www.vishay.com/doc?31542)




DIMENSIONS in inches (millimeters)

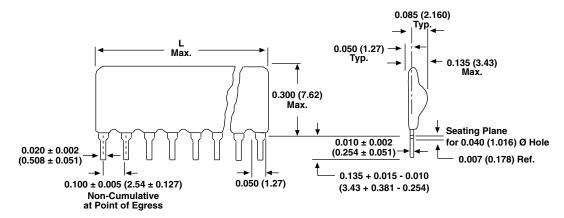

Pin #1 is extreme left-hand terminal on side with marking.

NUMBER OF PINS	L MAXIMUM	NUMBER OF PINS	L MAXIMUM	NUMBER OF PINS	L MAXIMUM
4 pin	0.400 (10.16)	9 pin	0.900 (22.86)	14 pin	1.400 (35.56)
5 pin	0.500 (12.70)	10 pin	1.000 (25.40)	15 pin	1.500 (38.10)
6 pin	0.600 (15.24)	11 pin	1.100 (27.94)	16 pin	1.600 (40.64)
7 pin	0.700 (17.78)	12 pin	1.200 (30.48)	17 pin	1.700 (43.18)
8 pin	0.800 (20.32)	13 pin	1.300 (33.02)	18 pin	1.800 (45.72)

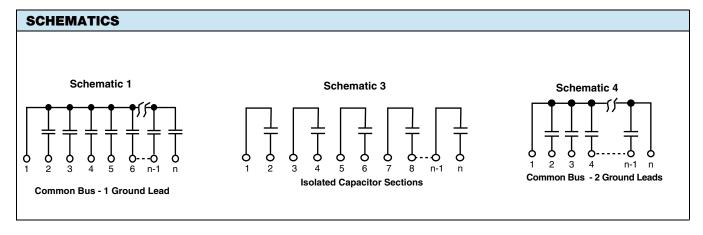



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

20108D1C471K5P 201CH7X7R102K5 20108D1X103K5P 201CK8X7R103K5 20108D3X104K5P 20110D4X104K5E 201CK8X7R102K5 20110D4X103K5P 20108D3X103K5P 201CH7X7R103K5 20108D1C221K5P 20109D1C102K5P 20110D1X223K5P CS20108D1C471K5 CS20108D1X102K5 CS20108D1X103K5 CS20108D1X104K5 20110D1C101K5P CS20110D1C151K5 20110D1C221K5P CS20110D1X102K5 CS20110D1X103K5 CS20110D1X223K5 CS20110D4X102K5 CS20110D4X103K5 CS20110D4X104K5 20108D1C101M5P 201CH4C0G101K5 20106D1X104K5P CS20106D1C271K5 20110D4X102K5P 20108D1X104K5P CS20108D1X104K5P 20110D1X102K5P 20110D4X104K5P CS20110D1X102K5P 20110D1X103K5P 20110D4C101K5P 20110D1X104K5P 20115D1C271K5P 20109D1X223M5P 20108D1X102K5P 20110D4X100K5P 201CK8X7R222K5 201CK9C0G101K5 201CK9C0G221K5 CS20108D1C101K5 CS20110D3X104K5 201CK9C0G471K5 CS20110D3X103K5 CS20110D1X103K5P CS20110D4X104K5P CS20110D1C101K5 20108D3C101K5P 20109D1X104K5P 20105D1X104K5P 20108D1C101K5P 20107D1X103M5E 20110D1X103K5E 20107D1C221K5E 20108D1X104K5E 20109D1X102K5P 20108D1C221K5E 20109D1X104K5E 20110D1X103M5E 20110D4X103K5E 20108D1C104K5P 20109D1C331K5P 20105D1C331M5E 20110D1C102M5P 20110D4X104M5P 20108D1C331K5P 20110D1C331K5P 20110D4X102M5P 20110D1X102M5E 20109D1X103K5E 20110D4C221K5E 20109D1C271K5P 20107D1X471M5E 20105D1X472M5E 20110D3X103K5E 20108D3X104M5E 20108D3X102M5E 20108D1X103M5E 20109D1C101K5E 20109D1C470K5P 20109D1C221M5E 20107D1C221K5P 20105D1X104M5E 20110D4C101K5E 20110D1X103M5P 20109D1X103K5P 20110D1C821K5P 20108D1C181K5P 20109D1X103M5P 20110D4X222K5P 20110D4X472K5E 20109D1X223K5E 20109D1X103M5E 20110D1C471K5E