

High Power Density Surface Mount PAR[®] Transient Voltage Suppressors

eSMP[®] Series


SMP (DO-220AA)

Anode  Cathode

LINKS TO ADDITIONAL RESOURCES



PRIMARY CHARACTERISTICS	
V_{BR}	6.8 V to 43 V
V_{WM}	5.8 V to 36.8 V
P_{PPM} (for V_{BR} 6.8 V)	250 W
P_{PPM} (for V_{BR} 7.5 V to 12 V)	300 W
P_{PPM} (for V_{BR} 13 V to 43 V)	400 W
P_D	2.5 W
I_{FSM}	40 A
T_J max.	185 °C
Polarity	Unidirectional
Package	SMP (DO-220AA)

FEATURES

- Junction passivation optimized design
passivated anisotropic rectifier technology
- $T_J = 185$ °C capability suitable for high reliability
and automotive requirement
- Very low profile - typical height of 1.0 mm
- Ideal for automated placement
- Unidirection only
- Excellent clamping capability
- Low incremental surge resistance
- Very fast response time
- Meets MSL level 1, per J-STD-020, LF maximum peak
of 260 °C
- AEC-Q101 qualified
- Material categorization: for definitions of compliance
please see www.vishay.com/doc?99912



TYPICAL APPLICATIONS

Protection for ICs, drive transistors, signal lines of sensor units, and electronic units in consumer, computer, industrial, and automotive applications.

MECHANICAL DATA

Case: SMP (DO-220AA)

Molding compound meets UL 94 V-0 flammability rating
Base P/NHM3_X - halogen-free, RoHS-compliant and
AEC-Q101 qualified ("X" denotes revision code e.g. A, B, ...)

Terminals: matte tin plated leads, solderable per
J-STD-002 and JESD 22-B102

HM3 suffix meets JESD 201 class 2 whisker test

Polarity: color band denotes cathode end

MAXIMUM RATINGS ($T_A = 25$ °C, unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Peak power dissipation with a 10/1000 μ s waveform (fig. 1 and 3) ⁽¹⁾⁽²⁾	P_{PPM}	See table next page	W
Peak power pulse current with a 10/1000 μ s waveform (fig. 1) ⁽¹⁾	I_{PPM}	See table next page	A
Power dissipation on infinite heatsink, $T_A = 75$ °C	P_D	2.5	W
Peak forward surge current 10 ms single half sine-wave superimposed on rated load	I_{FSM}	40	A
Maximum instantaneous forward voltage at 25 A ⁽³⁾	V_F	2.5	V
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +185	°C

Notes

- (1) Non-repetitive current pulse, per fig. 3 and derated above $T_A = 25$ °C per fig. 2
- (2) Mounted on PCB with 5.0 mm x 5.0 mm copper pads attached to each terminal
- (3) Pulse test: 300 μ s pulse width, 1 % duty cycle

**ELECTRICAL CHARACTERISTICS** ($T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise noted)

DEVICE TYPE	DEVICE MARKING CODE	BREAKDOWN VOLTAGE $V_{BR}^{(1)}$ AT I_T (V)		TEST CURRENT I_T (mA)	STAND-OFF VOLTAGE V_{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V_{WM} I_R (μA)	MAXIMUM REVERSE LEAKAGE AT V_{WM} $T_J = 150\text{ }^{\circ}\text{C}$ I_D (μA)	MAXIMUM PEAK PULSE SURGE CURRENT $I_{PPM}^{(2)}$ (A)	MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V)	MAXIMUM TEMPERATURE COEFFICIENT OF V_{BR} ($\%/^{\circ}\text{C}$)
		MIN.	MAX.							
TPSMP6.8A	AEP	6.45	7.14	10.0	5.80	300	1000	23.8	10.5	0.057
TPSMP7.5A	AGP	7.13	7.88	10.0	6.40	150	500	26.5	11.3	0.061
TPSMP8.2A	AKP	7.79	8.61	10.0	7.02	50.0	200	24.8	12.1	0.065
TPSMP9.1A	AMP	8.65	9.55	1.0	7.78	10.0	50.0	22.4	13.4	0.068
TPSMP10A	APP	9.50	10.5	1.0	8.55	5.0	20.0	20.7	14.5	0.073
TPSMP11A	ARP	10.5	11.6	1.0	9.40	2.0	10.0	19.2	15.6	0.075
TPSMP12A	ATP	11.4	12.6	1.0	10.2	1.0	5.0	18.0	16.7	0.078
TPSMP13A	AVP	12.4	13.7	1.0	11.1	1.0	5.0	22.0	18.2	0.081
TPSMP15A	AXP	14.3	15.8	1.0	12.8	1.0	5.0	18.9	21.2	0.084
TPSMP16A	AZP	15.2	16.8	1.0	13.6	1.0	5.0	17.8	22.5	0.086
TPSMP18A	BEP	17.1	18.9	1.0	15.3	1.0	5.0	15.9	25.5	0.088
TPSMP20A	BGP	19.0	21.0	1.0	17.1	1.0	5.0	14.4	27.7	0.090
TPSMP22A	BKP	20.9	23.1	1.0	18.8	1.0	5.0	13.1	30.6	0.092
TPSMP24A	BMP	22.8	25.2	1.0	20.5	1.0	5.0	12.0	33.2	0.094
TPSMP27A	BPP	25.7	28.4	1.0	23.1	1.0	5.0	10.7	37.5	0.096
TPSMP30A	BRP	28.5	31.5	1.0	25.6	1.0	5.0	9.7	41.4	0.097
TPSMP33A	BTP	31.4	34.7	1.0	28.2	1.0	5.0	8.8	45.7	0.098
TPSMP36A	BVP	34.2	37.8	1.0	30.8	1.0	5.0	8.0	49.9	0.099
TPSMP39A	BXP	37.1	41.0	1.0	33.3	1.0	5.0	7.4	53.9	0.100
TPSMP43A	BZP	40.9	45.2	1.0	36.8	1.0	5.0	6.7	59.3	0.101

Notes(1) V_{BR} measured after I_T applied for 300 μs , I_T = square wave pulse or equivalent

(2) Surge current waveform per fig. 3 and derated per fig. 2

(3) All terms and symbols are consistent with ANSI/IEEE C62.35

ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
TPSMP6.8AHM3_A/H ⁽¹⁾	0.024	H	3000	7" diameter plastic tape and reel
TPSMP6.8AHM3_A/I ⁽¹⁾	0.024	I	10 000	13" diameter plastic tape and reel

Note

(1) Automotive grade



RATINGS AND CHARACTERISTICS CURVES ($T_A = 25^\circ\text{C}$, unless otherwise noted)

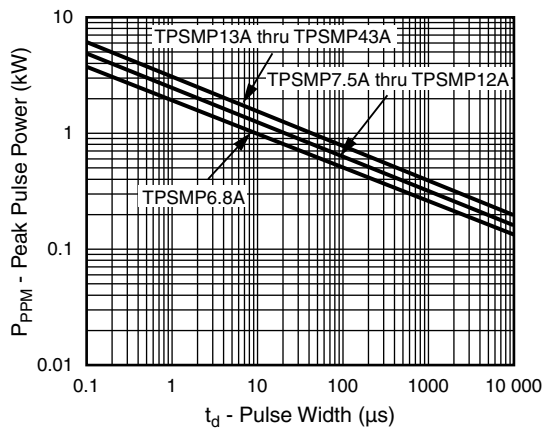


Fig. 1 - Peak Pulse Power Rating Curve

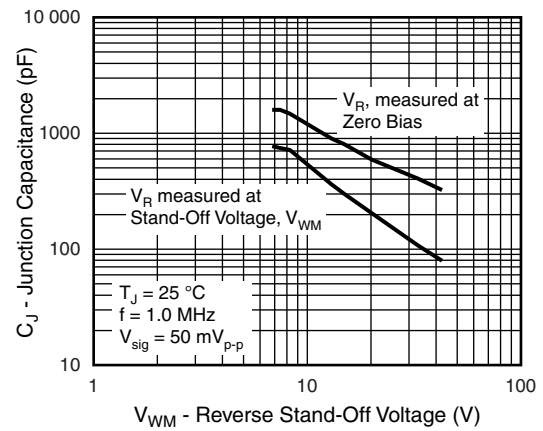


Fig. 4 - Typical Junction Capacitance

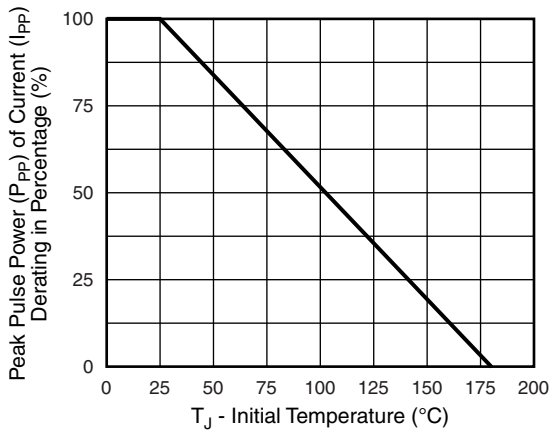


Fig. 2 - Pulse Derating Curve

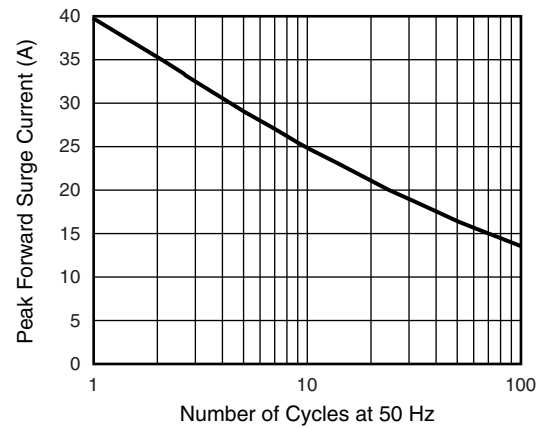


Fig. 5 - Maximum Peak Forward Surge Current

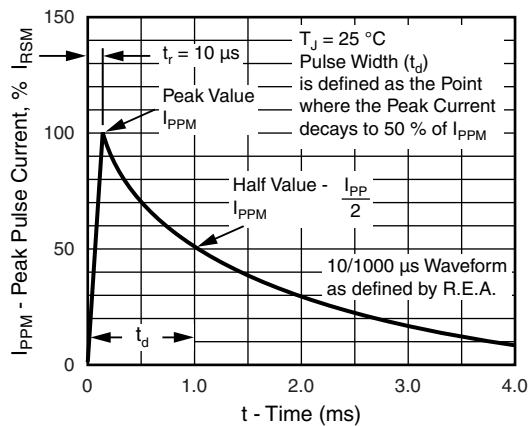


Fig. 3 - Pulse Waveform





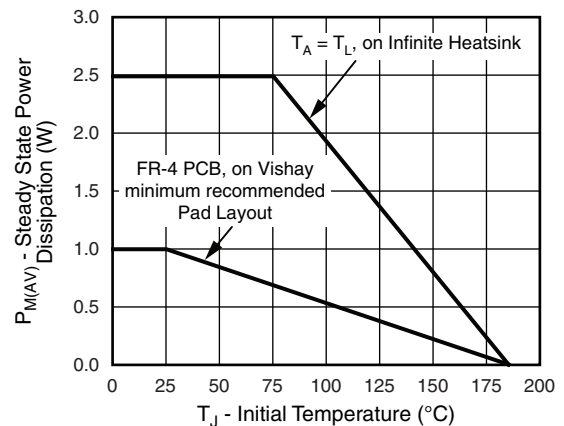


Fig. 6 - Steady State Power Derating Curve

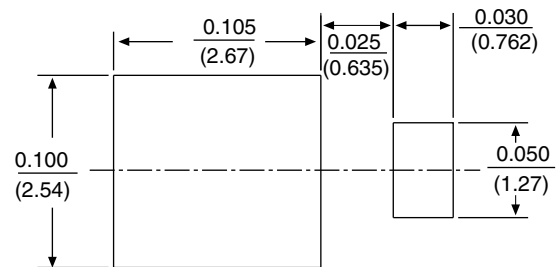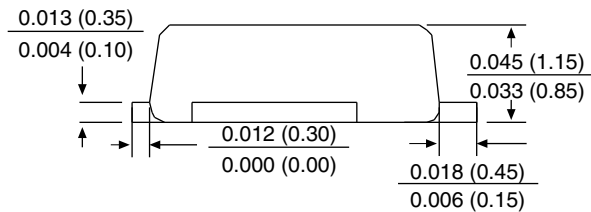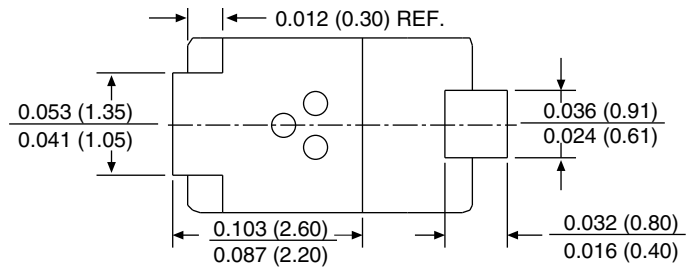

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

SMP (DO-220AA)

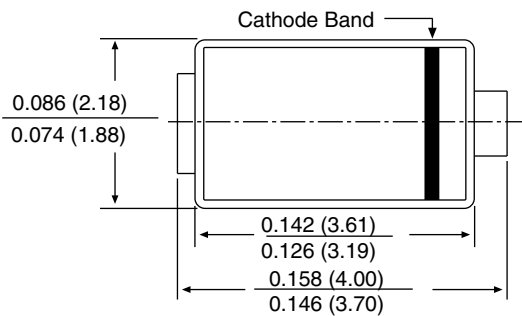



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[TPSMP10AHM3/84A](#) [TPSMP10AHM3/85A](#) [TPSMP10HM3/84A](#) [TPSMP10HM3/85A](#) [TPSMP11AHM3/84A](#)
[TPSMP11AHM3/85A](#) [TPSMP12AHM3/85A](#) [TPSMP12HM3/84A](#) [TPSMP12HM3/85A](#) [TPSMP13AHM3/85A](#)
[TPSMP13HM3/84A](#) [TPSMP13HM3/85A](#) [TPSMP15AHM3/85A](#) [TPSMP15HM3/84A](#) [TPSMP15HM3/85A](#)
[TPSMP16AHM3/84A](#) [TPSMP16AHM3/85A](#) [TPSMP16HM3/84A](#) [TPSMP16HM3/85A](#) [TPSMP18AHM3/85A](#)
[TPSMP18HM3/84A](#) [TPSMP18HM3/85A](#) [TPSMP20AHM3/85A](#) [TPSMP20HM3/84A](#) [TPSMP20HM3/85A](#)
[TPSMP22AHM3/84A](#) [TPSMP22HM3/85A](#) [TPSMP24AHM3/84A](#) [TPSMP24HM3/84A](#) [TPSMP24HM3/85A](#)
[TPSMP27AHM3/84A](#) [TPSMP27AHM3/85A](#) [TPSMP27HM3/85A](#) [TPSMP30AHM3/85A](#) [TPSMP30HM3/85A](#)
[TPSMP33AHM3/84A](#) [TPSMP33AHM3/85A](#) [TPSMP33HM3/84A](#) [TPSMP36AHM3/84A](#) [TPSMP36HM3/84A](#)
[TPSMP36HM3/85A](#) [TPSMP39AHM3/85A](#) [TPSMP39HM3/84A](#) [TPSMP43AHM3/84A](#) [TPSMP43AHM3/85A](#)
[TPSMP6.8AHM3/84A](#) [TPSMP6.8AHM3/85A](#) [TPSMP7.5AHM3/84A](#) [TPSMP7.5AHM3/85A](#) [TPSMP7.5HM3/84A](#)
[TPSMP7.5HM3/85A](#) [TPSMP8.2AHM3/84A](#) [TPSMP8.2AHM3/85A](#) [TPSMP8.2HM3/85A](#) [TPSMP9.1AHM3/84A](#)
[TPSMP9.1AHM3/85A](#) [TPSMP9.1HM3/84A](#) [TPSMP9.1HM3/85A](#) [TPSMP10AHE3/84A](#) [TPSMP10HE3/85A](#)
[TPSMP13AHE3/84A](#) [TPSMP15AHE3/84A](#) [TPSMP16AHE3/84A](#) [TPSMP16AHE3/85A](#) [TPSMP18AHE3/84A](#)
[TPSMP20AHE3/84A](#) [TPSMP20AHE3/85A](#) [TPSMP24AHE3/84A](#) [TPSMP24HE3/85A](#) [TPSMP30AHE3/84A](#)
[TPSMP33AHE3/84A](#) [TPSMP33HE3/84A](#) [TPSMP36AHE3/84A](#) [TPSMP39HE3/85A](#) [TPSMP43AHE3/84A](#)
[TPSMP6.8AHE3/84A](#) [TPSMP6.8HE3/85A](#) [TPSMP12AHM3/84A](#) [TPSMP15AHM3/84A](#) [TPSMP30AHM3/84A](#)
[TPSMP39AHM3/84A](#) [TPSMP20AHM3/84A](#) [TPSMP18AHM3/84A](#) [TPSMP33HM3/85A](#) [TPSMP11HM3/84A](#)
[TPSMP39HM3/85A](#) [TPSMP43HM3/84A](#) [TPSMP24AHM3/85A](#) [TPSMP30HM3/84A](#) [TPSMP36AHM3/85A](#)
[TPSMP8.2HM3/84A](#) [TPSMP27HM3/84A](#) [TPSMP13AHM3/84A](#) [TPSMP6.8HM3/85A](#) [TPSMP11HM3/85A](#)
[TPSMP22AHM3/85A](#) [TPSMP43HM3/85A](#) [TPSMP6.8HM3/84A](#) [TPSMP22HM3/84A](#)