




SWITCH SPECIFICATIONS	
POLE - POSITION	NON
CONTACT RATING	0.13A 5V DC
CONTACT RESISTANCE	1KΩ MAX.
INSULATION RESISTANCE	100 MΩ min. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 1010 V AC for 1 Minute
OPERATING FORCE	150±50gf
OPERATING LIFE	1,000,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	60rad

LED SPECIFICATIONS							
 ATTENTION LEDs are Electrostatic Sensitive devices 	Unit	Value / LED Color					
		Blue 5mA	Pure Green	Red	Yellow	Orange	Green White
LUMINOUS INTENSITY @20mA Iv	mcd						
Dominant Wavelength λD	nm						
FORWARD VOLTAGE @20mA Vf	V						

■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

u HOW TO ORDER

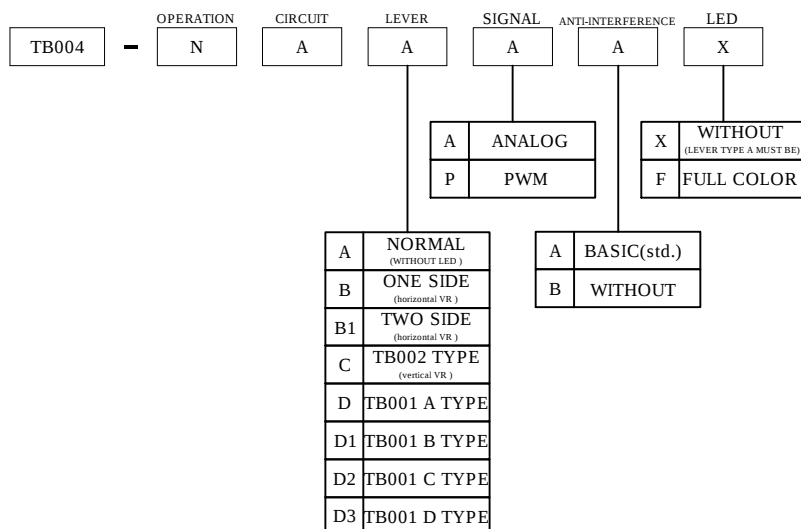

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Well Buying:](#)

[TB004-NAAAAX](#) [TB004-NACPAF](#) [TB004-NAD3AAF](#)