



Feature -

- small size
- bi-color LED illuminated available
- right angle and vertical PCB terminal
- SPDT, DPDT, lock / non-lock function

Application -

- consumer products
- computer products
- instrumentation
- communication equipments




SPECIFICATIONS



SWITCH SPECIFICATIONS	
POLE - POSITION	1P2T, 2P2T LOCK / NON-LOCK Action with LED
CONTACT RATING	30 VDC, 0.1A / 5 VDC, 0.1mA
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC; 100 mA, by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable; 500 V AC for 1 Minute
OPERATING FORCE	250 ± 100 gf
OPERATING LIFE	50,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	TRAVEL - 0.7 ± 0.3 mm FULL TRAVEL - 1.5 ± 0.3 mm

LED SPECIFICATIONS		Value / LED Color					
		Unit	Value / LED Color				
			Blue	Green	Red	White	Yellow
FORWARD CURRENT	If	mA	10	20	20	2	20
REVERSE VOLTAGE	Vr	V	5.0	5.0	5.0	5.0	5.0
REVERSE CURRENT	Ir	μA	10	10	10	10	10
FORWARD VOLTAGE	Vf	V	@ 10mA 3.0-4.0	2.1-2.5	2.0-2.5	@ 2mA 2.8-4.0	2.0-2.5
LUMINOUS INTENSITY	Iv	mcd	@ 10mA 200	800	1800	@ 2mA 12	1800

Physical and electrical information of LED will be provided upon customer's request on switches.

HOW TO ORDER


PS004	-	L	2	2	N	P	X	X	X		U	G	X	X	
		OPERATION		POSITION		TERMINAL		HOUSING COLOR		CAP SYMBOL		LED COLOR		LED COLOR	
		N NON-LOCK (std.)		2 2 POSITION (std.)		P P.C.B TYPE (std.)		K BLACK (std.)		Please refer to appendix 1(knob) For example K3  PK3:Printing K3Laser carving E1  PE1:Printing E1Laser carving  WITHOUT		B BLUE G GREEN R RED W WHITE Y YELLOW X WITHOUT		B BLUE G GREEN R RED W WHITE Y YELLOW X WITHOUT	
		L LOCK TYPE				R RIGHT ANGLE TYPE		G GRAY							
		T TACTILE				R1 RIGHT ANGLE TYPE 1		W WHITE							
						R2 RIGHT ANGLE TYPE 2		X WITHOUT							
						R3 RIGHT ANGLE TYPE 3									
						R4 RIGHT ANGLE TYPE 4									
										CAP COLOR		LED BRIGHTNESS		LED BRIGHTNESS	
										T Transparent (std.)		U ULTRA (std.)		U ULTRA (std.)	
		POLE				TIMING		FRAME		X WITHOUT		R REGULAR		R REGULAR	
		2 2 POLE (std.)				N NON - SHORTING (std.)		S1 SQUARE		N GREEN		X WITHOUT		X WITHOUT	
		1 1 POLE						S2 SQUARE		R RED					
								S2H SQUARE		Y YELLOW					
								S3 SQUARE		B BLUE					
								R1 ROUND		S SILVER					
								R1A ROUND							
								R2 ROUND							
								R2.1 ROUND							
								R2H ROUND							
								R2A ROUND H=6.2							
								R2B ROUND H=7.2							
								R2C ROUND							
								R2D ROUND							
								R3 ROUND							






► DIMENSION


PS004-L22NPXXX□□□□

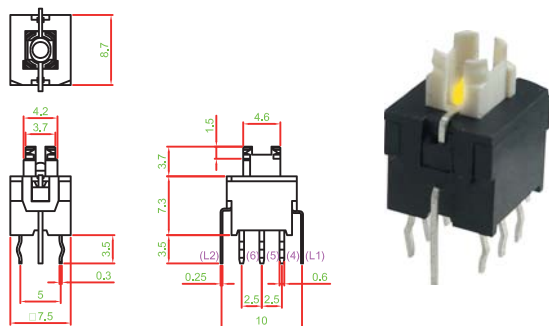


PS004-L22NPS1KT□□□□

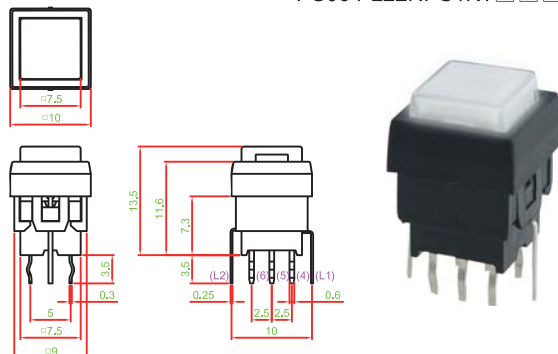


PS004-N22NPS2KT□□□□

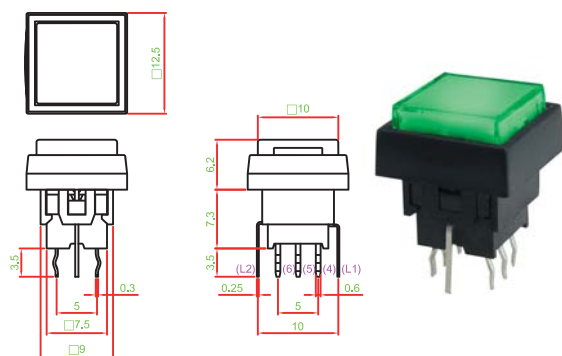


PS004-N22NPS2HKK□□□□

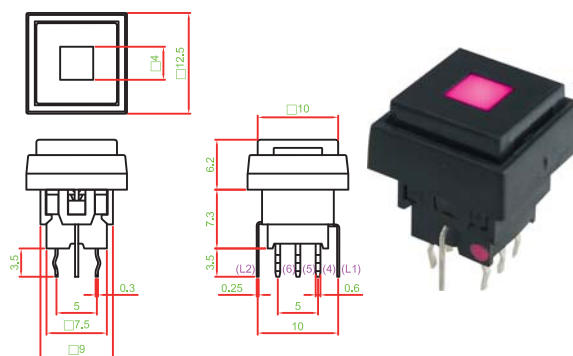


PS004-L22NPS3XT□□□□

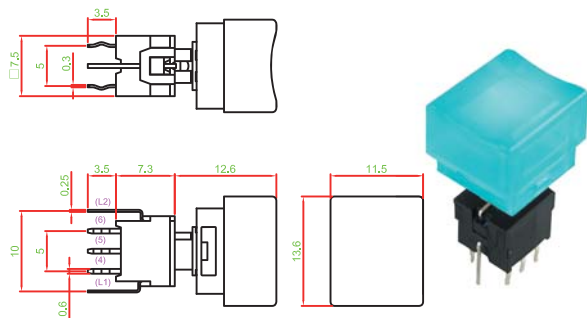


PS004-L22NPR1AXT□□□□

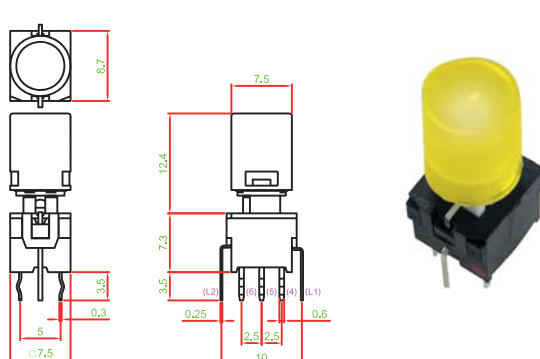

PS004-L22NPR1KT□□□□

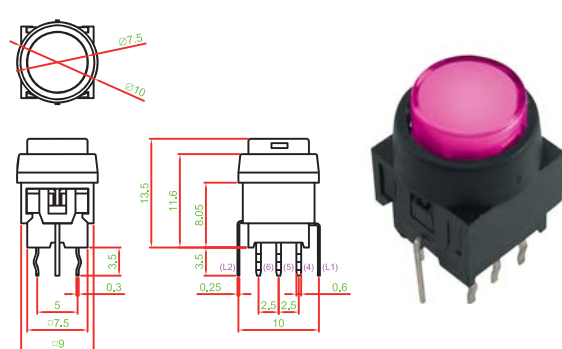


PS004-N22NPR2KT□□□□

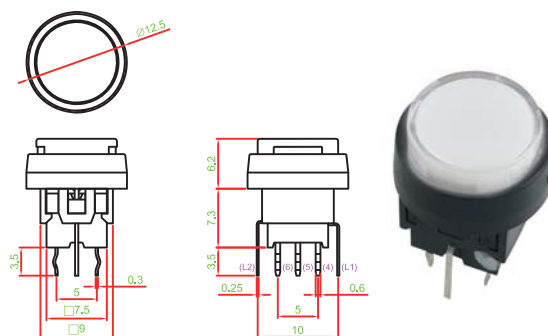


► DIMENSION


PS004-L22NPR2.1KT□□□□

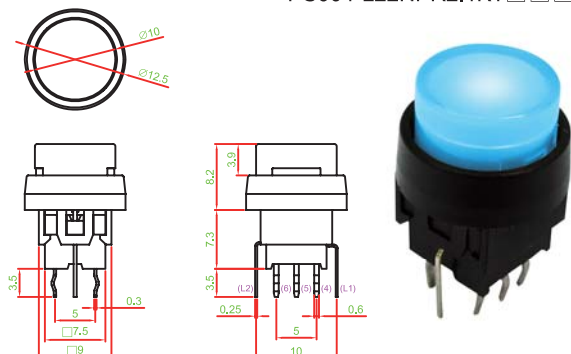


PS004-N22NPR2HKK□□□□

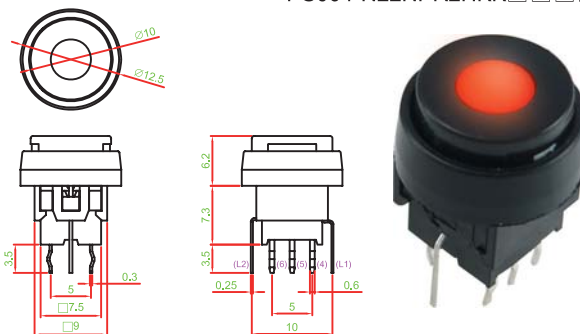


PS004-N22NPR3KT□□□□

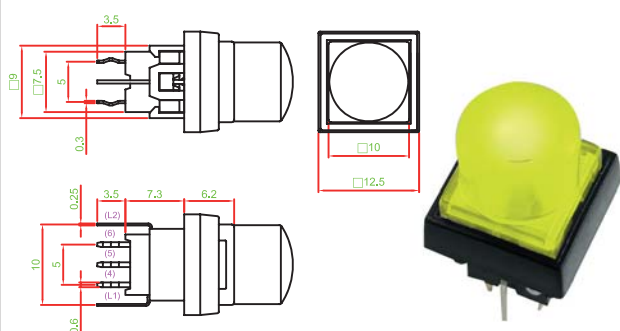


PS004-L22NPR2ABT□□□□

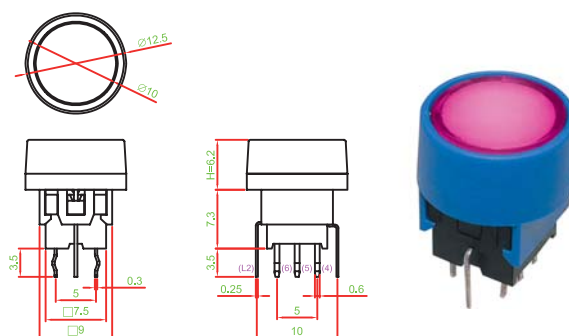


PS004-L22NPR2BBT□□□□

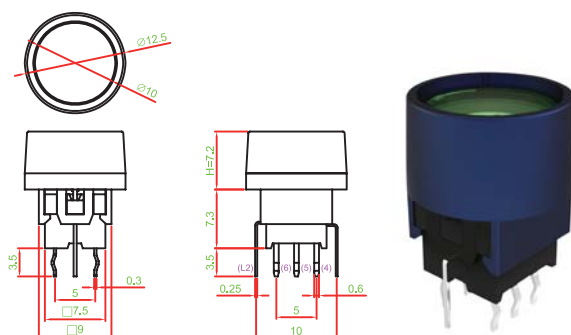


PS004-L22NPR2CBT□□□□

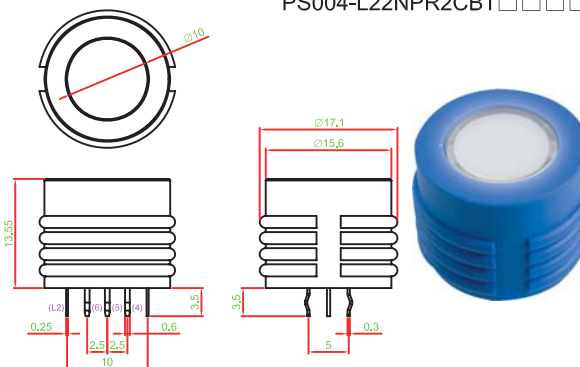

PS004-L22NPR2DBT□□□□

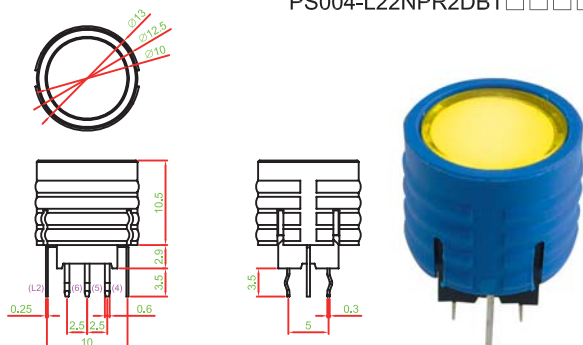


PS004-N22NRXXX□□□□

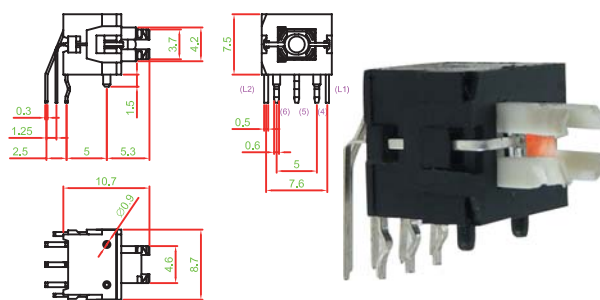


► DIMENSION


PS004-N22NRS1XT□□□□

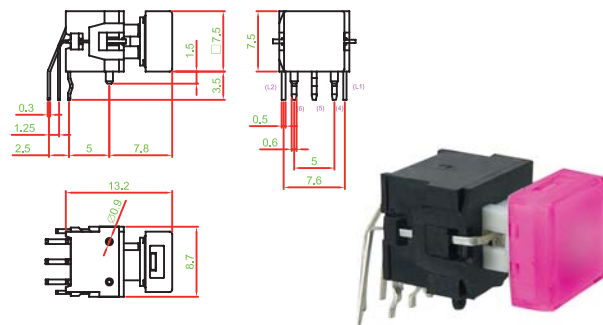


PS004-N22NRS1KT□□□□

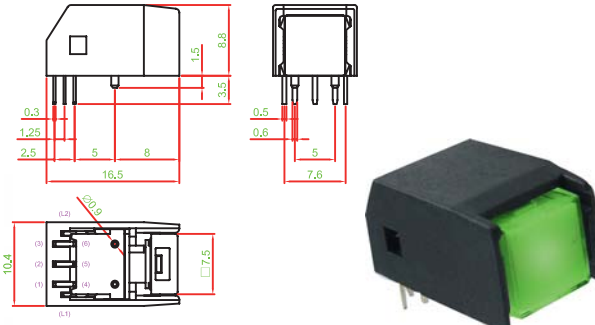


PS004-N22NR1S1XT□□□□

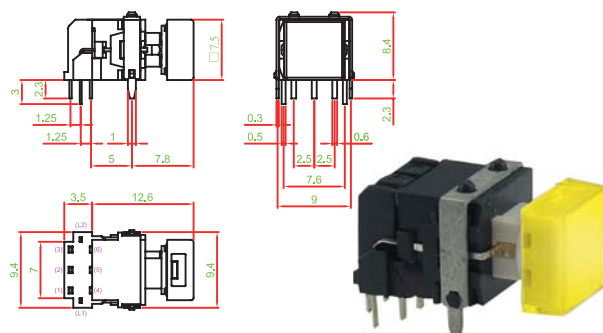


PS004-N22NR2S1KT□□□□

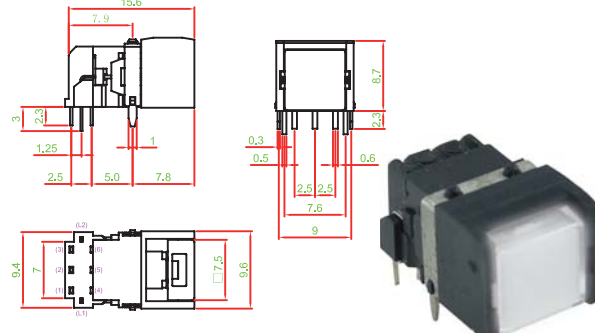


PS004-N22NR3S1KT□□□□

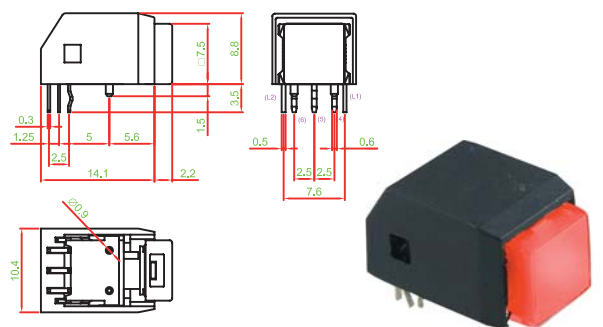

PS004-N22NR4S1XT□□□□

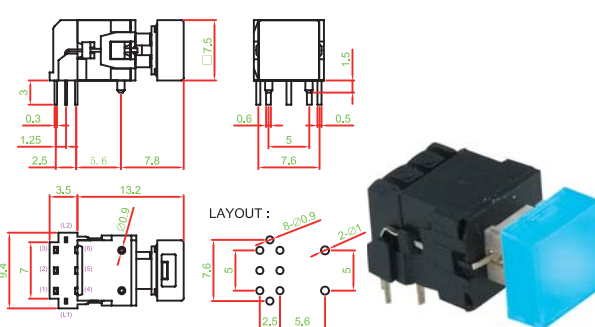


► CIRCUIT DIAGRAM




► P.C.B. LAYOUT

STANDARD TYPE



RIGHT ANGLE TYPE



► MATERIAL

- FRAME : PA + GF
- ACTUATOR : PA + GF
- BASE : PA + GF
- TERMINAL : BRASS ; SILVER PLATING
- SPRING : STAINLESS STEEL

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
A	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
B	A	B	C	D	E	F	G	H	I	J	CH5	CH6	DSK	PIP	C-KEY	CUT	TAKE	REC	ENG	PROG
C	K	L	M	N	O	P	Q	R	S	T	REPLAY	RET1	RET2	KEY ON	AUTO TAKE					
D	U	V	W	X	Y	Z	POWER	ON OFF	ON	OFF		USER A	USER B	USER C	USER D	USER E	USER F	USER G	USER H	USER I
E	OK		Auto	Enter	Start	STOP	OPEN	CLOSE	Exit	Move	USER J									
F	SET	Reset	Light	Alarm	Menu	Next	Back	Delete	Motor	Save										
G	Up	Down	Right	Left	Test	End	Insert	Lock	Print	+/-										
H	ESC	BC.	HOME	Health	D-LED 2	OC GENIE	VIDEO INPUT	clr CMOS	Green Power	Save OK										
I				F1	F2	F3	F4	F5	F6	F7										
J	F8	F9	F10	F11	F12	F13	F14	IN 1	IN 2	IN 3										
K	IN 4	IN 5	IN 6																	
L																				
M																				
N																				
O																				
P																				
Q	ME3	ME4	BGND 3D DVE1	BGND 3D DVE2	BUS COLOR	ME BUTTON LINK		INSERT	WIPE											
R		ALL		VP		COPY		RECORD MODE												
S			MUTE																	
T			group																	
U			chair																	
V																				
W	BORE-SIGHT	CANT	LEAD	RANGE	MRS	ZERO	TEST	UD	LR											
X	ID	Disp		GALL		BAND	SETUP	MODE	LINK	FUNC.										
Y	SHIFT					DEL														
Z				RUN	2D	3D	CH1	CH2	CH3	CH4										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Well Buying:

[PS004-L22NPR2DBKH5UBXX-1](#) [PS004-N22NR2S1KTURXX](#) [PS004-N22NPR1AXBUBXX](#) [PS004-L12NRR1XTUBXX](#)