



The low profile design of ALA3800 Series Raceway accommodates power or communication services.

## Aluminum Single Channel Raceway

### Available Factory Prewired.

Isoduct™ ALA3800 Series Aluminum Raceway System meets the demands of commercial spaces, providing a handsome and effective method of directing power or communications services where required. The low-profile surface mounted raceway is easy to install and because of its two-piece design, wiring is always accessible and changes are easily accomplished.

## Features & Benefits

- **Single-Channel, Single-Cover, 2 1/4" (57mm) deep aluminum raceway.** Accommodates high density communication cabling for networks and phone systems.
- **Snap fit cover.** Provides maximum flexibility for adding or relocating circuits, data openings or electrical devices. Side removal slots limit visibility of any accidental marring during cover removal. Shares cover plates with Wiremold ALA4800 Series Raceway.
- **Cable bend radius control inserts.** Provides a 2" (51mm) bend radius for Fiber Optic/Cat 5 installations.
- **Durable, architectural clear anodized finish.** Wipes clean and resists corrosion. Custom colors available upon request. Consult factory for more information.
- **Accommodates standard electrical wiring devices.** Accommodates most installations including single outlets, duplex outlets, NEMA-Locking outlets, GFCI outlets, and Pass & Seymour surge protected outlets.
- **Electrical device identification with self-adhesive polyester labels or optional engraving.** No guesswork or time consuming tracing of circuits. Speeds circuit additions and renovations. [See Device and Raceway labeling Options]
- **Mitered standard fittings.** Provides a complete installation.
- **Increased productivity for the contractor.** Jobs can be packaged by area, floor, or building and shipped per job site requirements.
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point of use.
- **UL5 and ADA Compliant.** Raceway and fittings meet UL5 specifications and can be installed in conformance with ADA requirements.
- **UL Listed commercial outlet centers.** File E317375 Multioutlet assemblies rated to 20A maximum can be provided with listed cord and plug assemblies. These assemblies are optimal for mounting to semi-permanent structures such as shelving and rack displays found in many lab applications.

## Vertical Markets

- Commercial
- Healthcare
- Education
- Retail
- Government



Download this product's PEP ecospassport® environmental product declaration at [www.legrand.us/resources-and-downloads](http://www.legrand.us/resources-and-downloads). This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.

## Compliance




cULus Listed Raceway File E4376, Guide RJBT, Fittings File E41751, Guide RJPR

Raceway & Fittings – Meets Article 386 of NEC and Section 12-3032 of CEC.

Multioutlet Assemblies – File E15191, Guide PVGT. Meets Article 380 of NEC and Section 12-3032 of CEC.

### ALA3800 Series Raceway Specifications


#### ALA3800B-10



**Base** – Satin Anodized finish.  
Nominal wall thickness of 0.078" (1.99mm). Packed four 10' (3.00m) lengths per carton.


**Country of Origin: Mexico**

#### ALAC-5



**Cover** – Satin Anodized finish.  
Nominal wall thickness of 0.078" (1.99mm). Packed eight 5' (1.50m) lengths per carton.

**Country of Origin: Mexico**

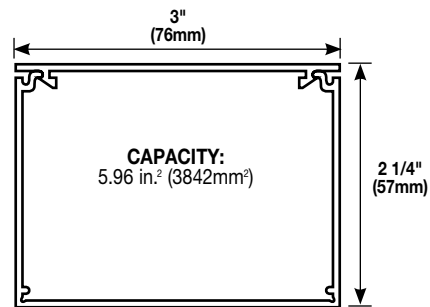

### ALA3800 Series Raceway Wire Fill Capacity Charts

**ALA3800 Raceway Wire Fill Capacities for Data/Communication**

CABLE/WIRE TYPE		O.D. Inches (mm)	AL4400	AL4520**	ALA4750	ALA3800	ALA4800**	AL7450	
			40%	40%	40%	40%	40%	TOP 40%	BOTTOM 40%
UNSHIELDED TWISTED PAIR	4-pair, 24 AWG Cat. 3	0.190 (4.8)	66	84	69	86	86	71	66
	4-pair, 24 AWG Cat. 5e	0.210 (5.3)	55	69	57	70	70	58	55
	4-pair, 24 AWG Cat. 6	0.250 (6.4)	38	48	40	50	50	41	38
	4-pair, 24 AWG Cat. 6a*	0.354 (9.0)	19	24	20	25	25	20	19
	25-pair, 24 AWG	0.360 (9.1)	19	23	19	24	24	20	19
COAXIAL	RG6/U	0.270 (6.9)	33	41	34	43	43	35	33
FIBER OPTIC	ZipCord	0.118 x 0.236 (3 x 6)	68	85	70	88	88	72	68
	Round 4 Strand Fiber	0.187 (4.7)	69	87	71	89	89	73	69
	Round 6 Strand Fiber	0.256 (6.5)	37	46	38	47	47	39	37

\* Category 6 augmented (6a) cable for 10 gigabit ethernet – max allowed cable diameter per addenda No. 11 ANSI TIA/EIA 568-B.2.

\*\* Each compartment.

**ALA3800 Raceway Wire Fill Capacities for Power (40% Fill Factor)**

WIRE SIZE THHN (STRANDED)		ALA3800	AL4400*	AL4520*	AL4750	AL7450		ALA4800*
						Single	Dual*	
POWER WIRING WITHOUT DEVICES	8 AWG	41	50	54	35	53	49	41
	10 AWG	56	87	110	61	108	101	56
	12 AWG	98	139	172	97	170	159	98
POWER WIRING WITH GFCI DEVICES (2.04 sq. in.)	8 AWG	30	28	32	13	31	27	30
	10 AWG	42	49	65	22	64	57	42
	12 AWG	73	77	102	35	100	89	73

\* Each compartment



**Wiremold Prewired Raceway reduces installation time, gets installers off the job faster, and eliminates the need for field cutting.**


**Contact your local Wiremold Representative or the factory for more information on prewired raceway and assistance in planning your next prewired installation. Our Prewired Raceway Team is ready to help.**



**Prewired Raceway is prewired and packed to the job specifications at the factory before shipping to the jobsite.**

## ALA3800 Series Raceway Fittings Ordering Information


### ALAWC



**Wire Clip** – Holds conductors in place along raceway. Snaps into grooves on base.

**Country of Origin: USA**


### ALA01



**Slide Coupling** – Connects adjoining sections of ALA4800 Series Raceway base.

**Country of Origin: USA**


### ALA09



**Grounding Adapter** – Connects to equipment grounding conductor

**Country of Origin: USA**


### ALA17A



**Internal Corner Coupling** – Makes internal 90° turn in a raceway run

**Country of Origin: USA**


### ALA3806



**Cover Clip** – Covers seam where two sections of ALAC-5 Cover come together.

**Country of Origin: USA**


### ALA3810B



**Blank End Cap** – Closes off open ends of ALA3800 Series Raceway.

**Country of Origin: Mexico**


### ALA3810B1



**Entrance End Cap** – For feeding raceway. Has two concentric 1/2" and 3/4" knockouts.

**Country of Origin: Mexico**


### ALA3811



**90° Flat Mitered Elbow with Coupling** – Makes 90° turns in runs of ALA3800 Series Raceway. Includes two (2) ALA01 Couplings.

**Country of Origin: Mexico**


### ALA3815



**Flat Tee with Coupling** – Makes branch connections of two runs of ALA3800 Series Raceway. Includes three (3) ALA01 Couplings.

**Country of Origin: Mexico**


### ALA3817



**Internal Elbow with Coupling** – Makes 90° internal turns in runs of ALA3800 Series Raceway. Includes Two (2) ALA01 Couplings.

**Country of Origin: Mexico**


### ALA3817N



**Inverted Internal Elbow with Coupling** – Connects vertical runs with horizontal runs of ALA3800 Series Raceway with its cover facing up. Includes two ALA01 Couplings.

**Country of Origin: Mexico**


### ALA3818



**External Mitered Elbow with Coupling** – Makes 90° external turns in runs of ALA3800 Series Raceway. Includes two (2) ALA01 Couplings.

**Country of Origin: Mexico**


### ALA11R1



**Bend Radius Control Insert for Flat Elbow** – Makes 90° turns in runs of ALA4800 Series Raceway. Includes four (4) ALA01 Couplings.

**Country of Origin: USA**

### ALA17/18R1




**2" (51mm) Bend Radius Insert for Internal and External Elbow** – Inserts into ALA3817, ALA3817N, and ALA3818 fittings. For new and retrofit applications whether the cable installation is lay-in or pull-through.

**Country of Origin: USA**

## ALA3800 Series Raceway Device Plates Ordering Information


### ALA-BL



**Blank Cover Plate** – Covers a 12" (305mm) section of raceway.

**Country of Origin: Mexico**


### ALA-MAB



**MAB Cover Plate** – Accepts standard commercial faceplates. Provides a flush installation. Includes adapter.

**Country of Origin: Mexico**


### ALA-DR



**Duplex Receptacle Cover Plate** – Mounts standard duplex devices. Accepts 106 Frame.

**Country of Origin: Mexico**


### ALA-MABRT



**Ortronics Cover Plate** – Accepts six Ortronics TracJack® or three Series II communications inserts. Both adapters included.

**Country of Origin: Mexico**


### ALA-E



**Single Receptacle Cover Plate** – 1.40" (36mm) diameter. For straight blade and locking single receptacles.

**Country of Origin: Mexico**


### ALA-SG



**Cover Plate with 1 3/4" x 2 3/4" (44mm x 70mm) Holecut** – Accepts Activate connectivity inserts with a single-gang or angled single-gang faceplate (not included).

**Country of Origin: Mexico**


### ALA-F



**Single Receptacle Cover Plate** – 1.59" (40mm) diameter. For straight blade and locking single receptacles.

**Country of Origin: Mexico**


### ALA-2A



**Activate 2A Cover Plate** – Accepts a single 2A Activate insert.

**Country of Origin: Mexico**


### ALA-G



**GFCI/Surge/Decorator Cover Plate** – For GFCI or Pass & Seymour surge protection receptacles.

**Country of Origin: Mexico**


### ALA-ABRT



**Ortronics Cover Plate** – Accepts two Ortronics TracJack® or one Series II communication inserts. Both adapters included.

**Country of Origin: Mexico**


### ALA-J



**Single Receptacle Cover Plate** – 2.13" (54mm) diameter. For straight blade or locking single receptacles.

**Country of Origin: Mexico**


### ALA-Z



**3/4" (19.1mm) Grommet/Mousehole Cover Plate** – Facilitates the exit of voice or communication cabling. Grommet furnished.

**Country of Origin: Mexico**


### ALA-N



**Toggle Switch Cover Plate** – For toggle switch.

**Country of Origin: Mexico**


### ALA-LPBS2



**Ortronics® Low Profile Adapter Cover Plate** – Accepts Ortronics datacom inserts. 3-Series II Devices Low Profile Adapter included.

**Country of Origin: Mexico**

### ALA-LPB




**Activate LPB Cover Plate** – Accepts Activate connectivity inserts. Includes cover and Activate low profile adapter with station label openings. (6A size opening)

**Country of Origin: Mexico**


**NOTE:** All device plates are 12" (305mm) in length.

## ALA3800 Series Raceway Communication Openings

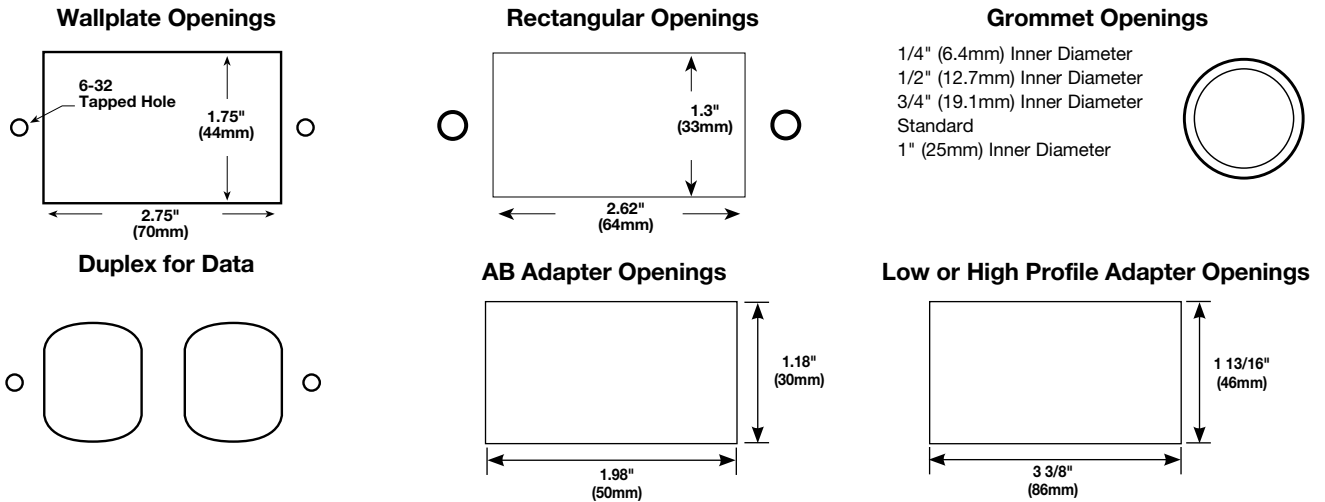

NOTE: Custom openings also available – consult factory for more information.

## Communication Adapters

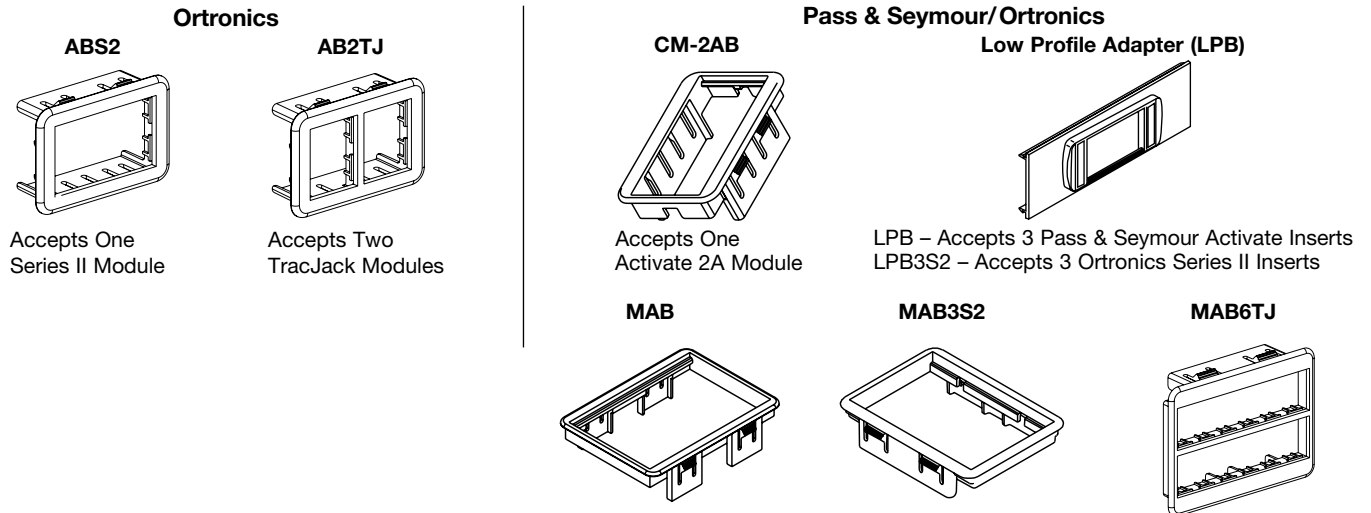

NOTE: Custom openings also available – consult factory for more information.


### ALA3800 Series Raceway Prewired Features

FEATURES	STANDARD	OPTIONS
Communication Devices	Ortronics & Activate Connectivity System Devices	Other manufacturers
Electrical Devices	Pass & Seymour	Other manufacturers
Cover Length	12" (305mm) or 18" (457mm)	24" (610mm), 36" (914mm), custom or continuous
Body Length	Longest = 10' (3.05m), shortest = 1' (305mm)	
Installation	Surface mounted	Flush mounted (recessed)
Finish	Architectural Class II Clear Anodized	Custom colors available, consult factory.*
Fittings	Mitered	Butt joints or custom
Wire Type	THHN Stranded	Options per specification
Wiring Splices	Insulation displacement connectors	Continuous wiring or twist-on wire connector
Grounding Conductors	Wire gauge per National Electrical	Oversized and/or separate grounding wires Code (NEC) and shared grounding wires
Device Identification	Clear self-adhesive polyester label with black letters	Engraved covers, self-adhesive engraved nameplate, colored self-adhesive polyester labels with black letters
Neutrals	Shared neutral	Oversized and/or separate neutral wires
Pigtails	12" (305mm) feeds and receptacle leads	Per specification
Conduit Feeds	Raceway drilled at job site with hole saw	Entrance end cap
Device Mounting	Mounted to cover with 2 counter-sunk #6-32 screws	Device mounting brackets
Record Drawings	3 sets and 2 copies of marked-up blueprints	Per job requirements
Submittal Services	Detailed Submittal	Express Submittal or Submittal Free

\* Paint chip required for custom colors.

### ALA3800 Series Raceway Ordering Process for Prewired Applications

- Detailed Submittal** The detailed submittal shows exactly how each raceway run will be built (lengths, number and type of receptacles, wiring schematics, circuiting information, etc.). The contractor and/or distributor must review and correct any information not clearly indicated on the drawings or specs, approve and return before production can be scheduled.
- Submittal Free** The Prewired Express Building Plan Checklist is filled out by the contractor or distributor and sent along with plans, casework, and specs. No submittal is required and the project is scheduled for production upon receipt of all information.

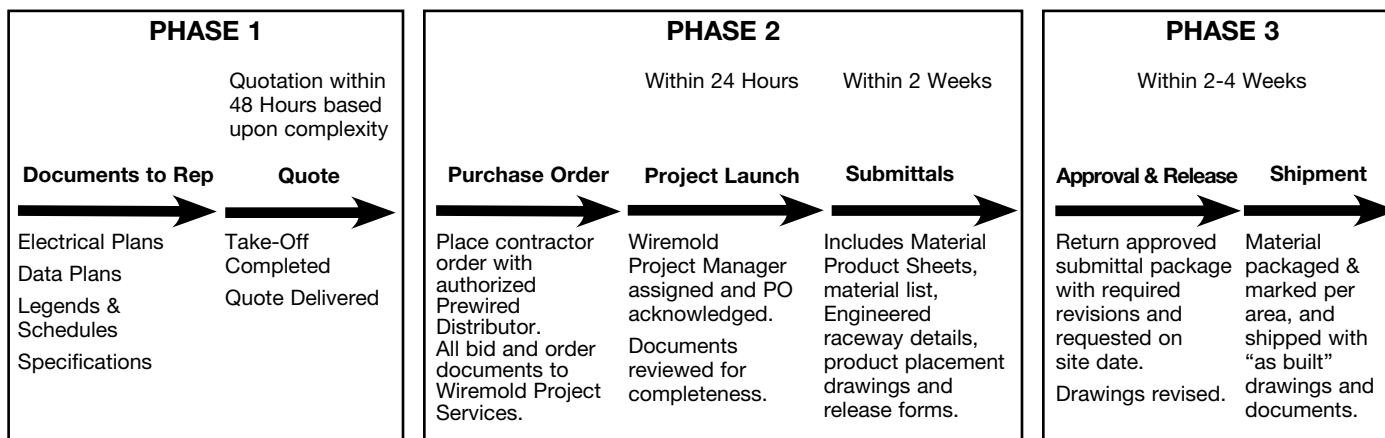


Prewired Raceway gets installers off the job in 1/3 less time than conventional raceway installations.



Wiremold Prewired Raceway is available in a wide range of capacity and configuration options.



### ALA3800 Series Raceway Device Openings

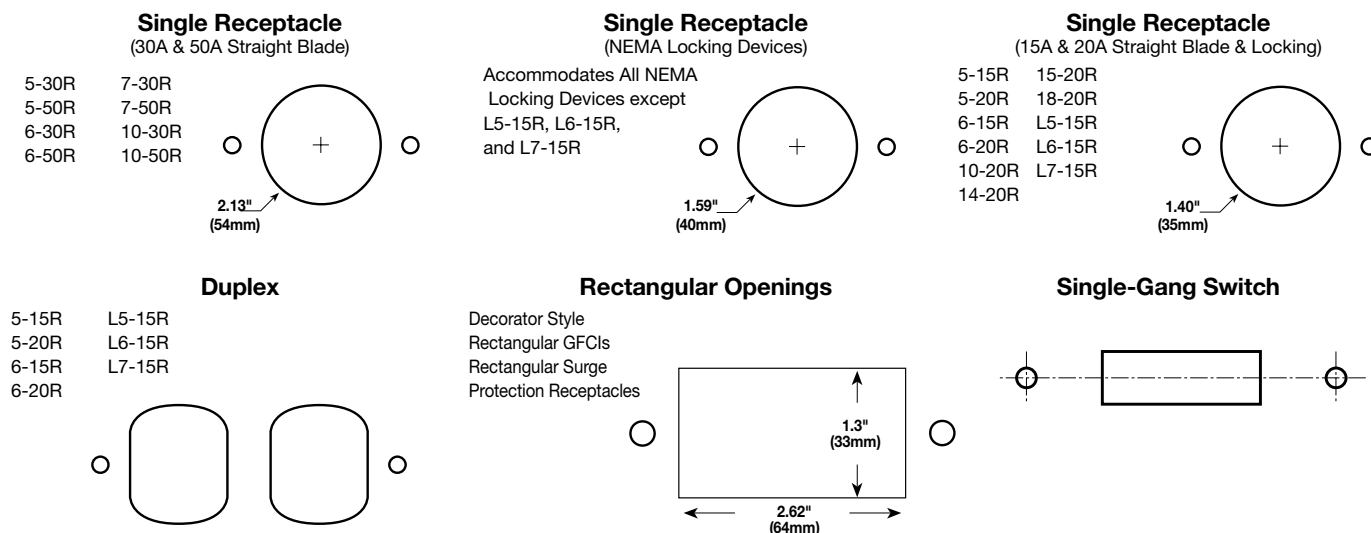

**NOTE:** Custom openings are also available – consult factory for more information.

### ALA3800 Series Raceway Device Compatibility for Prewired Applications

#### NEMA Locking Compatibility

All of the following NEMA locking devices will fit.

L5-15R	L6-15R	L7-15R	L8-20R	L10-20R	L12-20R	L14-20R	L16-20R	L18-20R	L20-20R	L22-20R
L5-20R	L6-20R	L7-20R	L8-30R	L10-30R	L12-30R	L14-30R	L16-30R	L18-30R	L20-30R	L22-30R
L5-30R	L6-30R	L7-30R	L9-20R	L11-20R	L13-20R	L15-20R	L17-20R	L19-20R	L21-20R	L23-20R
			L9-30R	L11-30R		L15-30R	L17-30R	L19-30R	L21-30R	L23-30R


#### NEMA Straight Blade Compatibility

5-15R	5-20R	5-30R	5-50R	6-20R	6-30R	6-50R	7-30R	7-50R	10-20R	10-30R	10-50R	14-20R	14-30R
Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
14-50R	14-60R	15-20R	15-30R	15-50R	15-60R	18-20R	18-60R	GFCI	SURGE				
Y	1	Y	Y	Y	Y	Y	Y	Y	Y				

Y= will fit, N= will not fit, 1= requires adapter box

### Device and Raceway Labeling Options

- Device labeling is available in the following materials:
  - Clear self-adhesive polyester labels
  - Other color self-adhesive polyester labels
  - Covers engraved with black lettering
  - Engraved phenolic nameplates with adhesive backing
- The back of the raceway is labeled with the raceway number and the room or area number(s).

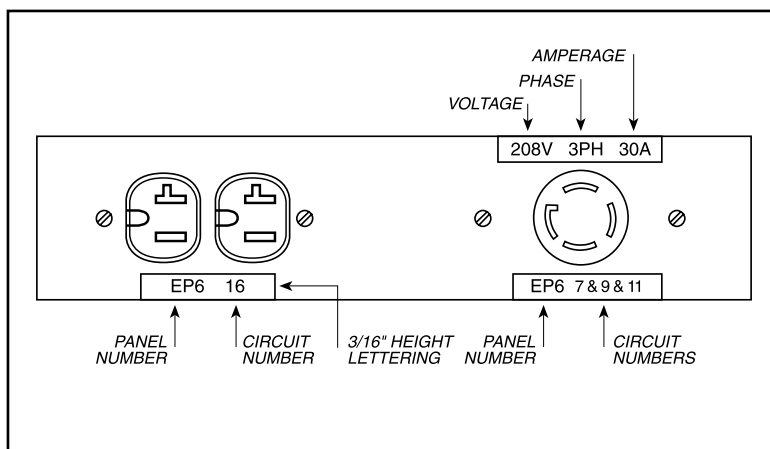

**NOTE: All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.**

---



**NOTE:** The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act complaint. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)

**Canada**  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)





# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Wiremold:

[ALA01](#) [ALA09](#) [ALA17A](#) [ALA-2A](#) [ALA3806](#) [ALA3810B1](#) [ALA3815](#) [ALA3817](#) [ALA3817N](#) [ALA3818](#) [ALA-F](#) [ALA-G](#)  
[ALA-J](#) [ALA-LPB](#) [ALA-LPB3S2](#) [ALA-MAB](#) [ALA-MABRT](#) [ALA-N](#) [ALA-SG](#) [ALAWC](#) [ALA-Z](#) [ALA3800B-10US](#) [ALA-E](#)  
[ALA-FUS](#) [ALA-SGUS](#) [ALAC-5US](#)