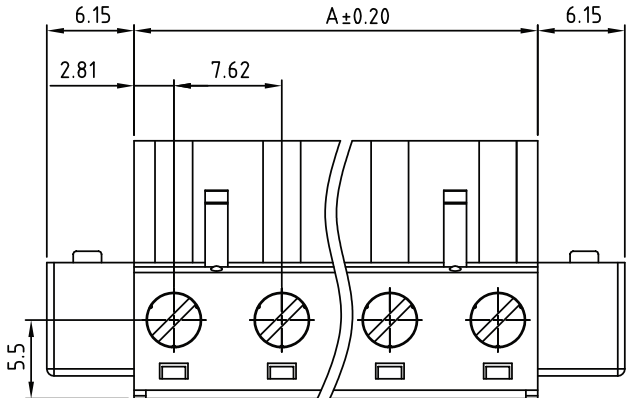

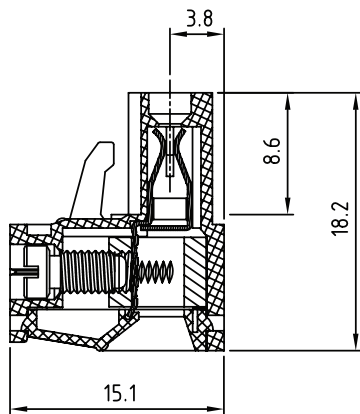


TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMMABILITY RATING: UL94-V0
COLOR: GREEN
METAL HOUSING: BRASS (CuZn)
TERMINAL SCREW: STEEL ZINC PLATING
TERMINAL SCREW SLOT TYPE: "-"
WIRE GUARD: PhBz TIN PLATED
FLANGES SCREW: STEEL M2.5

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 20 A
WORKING VOLTAGE: 300 VAC
WITHSTANDING VOLTAGE: 1.6 KV
CONTACT RESISTANCE: 20 mOhm max


STANDARD
cULus CERTIFIED E315414

MECHANICAL
SOLID WIRE: 24-12 AWG / 0.205-3.31 MM²
STRANDED WIRE: 24-12 AWG / 0.205-3.31 MM²
TORQUE: 5.0 Lb-In / 0.56 Nm

WIRE STRIPE LENGTH: 7-8 MM
SCREW: M3.0
PITCH: 7.62 MM

PACKAGING
BOX

DIMENSION
A = (NB. PINS - 1) x PITCH
B = (NB. PINS x PITCH) - 2

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: SERIE 3404 - 7.62MM VERTICAL CABLE ENTRY PLUG WITH FLANGES - WR-TBL	SIZE A4
G								
F								
E								
D	12-MAY-16	DRAWING	AK	APPROVAL: FBr	UNIT: MM	WERI PART NO: 691 340 400 0xx		
C	21-OCT-09	SCREW	JP					
B	14-OCT-09	STANDARD	JP					
A	05-NOV-08	PDF	JP					
REV	DATE	FILE	BY					
					SCALE:			
					SHEET: 1/2			
					DRAW: MARVIN			

1				2				3				4				5								
Cautions and Warnings: This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.																	A							
																	B							
																	C							
																	D							
RoHS Compliant																								
G				PROJECTION: 				GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15				 WÜRTH ELEKTRONIK												
F																								
E																								
D																								
C				APPROVAL: JC				UNIT: MM								DESCRIPTION: DISCLAIMER				SIZE				
B								SCALE:								WERI PART NO: DISCLAIMER				A4				
A	10-SEP-14	PDF	QL					SHEET: 2/2																
REV	DATE	FILE	BY					DRAW: QL																

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[691340400006](#)