

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes

more than you expect





Midcom



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
INDUCTANCE 16-14	100kHz, 100mVAC, 8mADC, Lp	350uH min.
INDUCTANCE 11-9	100kHz, 100mVAC, 8mADC, Lp	350uH min.
(6B) DIELECTRIC INPUT-OUTPUT	4800Vrms, 1 second	4000Vrms, 1 minute
URNS RATIO	(1-3):(16-14)	1:1, ±2%
URNS RATIO	(6-8):(11-9)	1:1, ±2%
INSERTION LOSS	500k - 100MHz	-1.2dB max.
RETURN LOSS	500k - 30MHz	-18dB min.
RETURN LOSS	30M - 45MHz	-15dB min.
RETURN LOSS	45M - 60MHz	-13dB min.
RETURN LOSS	60M - 80MHz	-10dB min.
CROSSTALK	1M - 100MHz	-40dB min.
DCMR	500k - 100MHz	-33dB min.

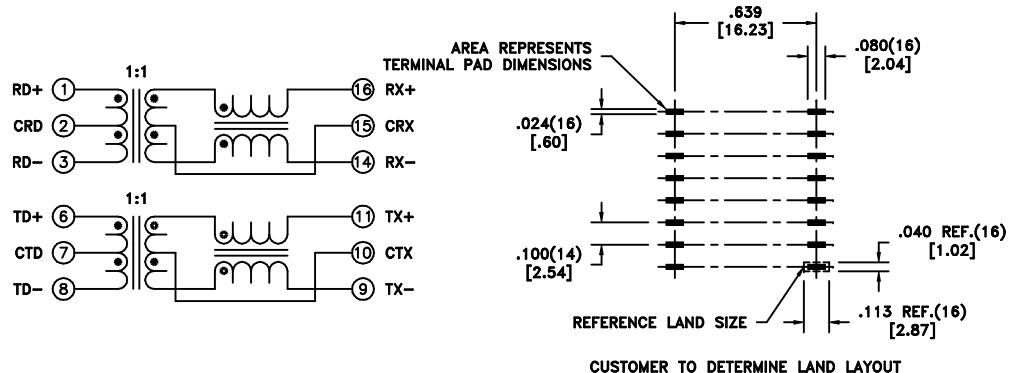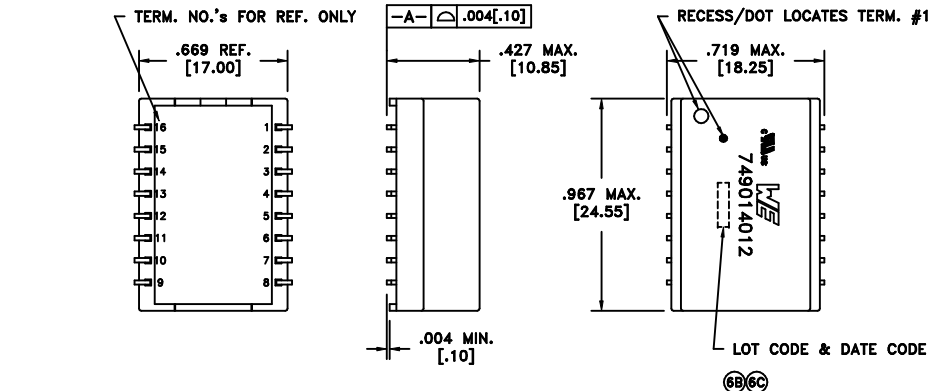

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: 0°C to +70°C.

COPLANARITY: All 16 terminals must lie on a plane within .004 [.10] of Surface A after lead tinning.

- (6B) Designed to comply with the following requirements as defined by IEC60950-1:
 - Reinforced insulation at a working voltage of 250Vrms.
- (6B) Designed to comply with with 8mm min. creepage and clearance as defined by IEC60601-1.

(6B)

AGENCY NUMBER	
UL60950	E205930
CSA60950 (Via CUL)	E205930

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
6C	12/12	Method: Tape & Reel		Angles: ±1°	TRANSFORMER	749014012
6B	2/10	PKG-0670		Decimals: ±.005 [.13]		
6A	2/08	www.we-online.com/midcom		Fractions: ±1/64 Footprint: ±.005 [.13]		
SEE REVISION SHEET FOR REVISION LEVEL				This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	EDFP-J16	SPECIFICATION SHEET 1 OF 1
					eiSos p/n: 749014012	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[749014012](#)