


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

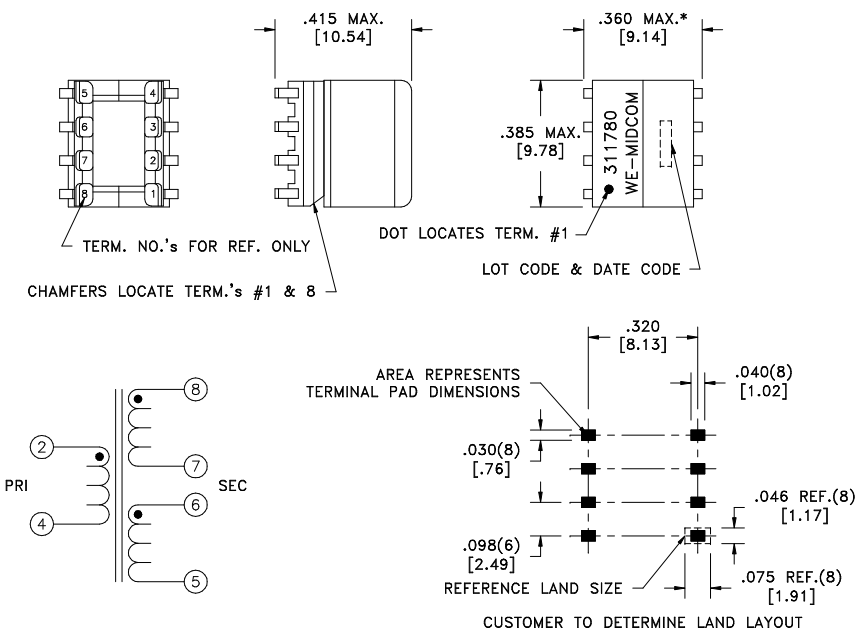

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS		
D.C. RESISTANCE	2-4	@20°C	0.055 ohms max.
D.C. RESISTANCE	5-6	@20°C	1.50 ohms max.
D.C. RESISTANCE	7-8	@20°C	1.95 ohms max.
INDUCTANCE	2-4	100kHz, 100mVAC, Ls	2.00uH ±10%
SATURATION CURRENT	20% rolloff from initial		>10A
LEAKAGE INDUCTANCE	2-4	tie(5+6+7+8), 100kHz, 10mVAC, Ls	80nH typ., 200nH max.
DIELECTRIC	2-8	2500VAC, 1 second	2000VAC, 1 minute
DIELECTRIC	2-6	2500VAC, 1 second	2000VAC, 1 minute
URNS RATIO	(8-7):(2-4)		8:1, ±1%
URNS RATIO	(6-5):(2-4)		8:1, ±1%

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0410 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750311780
6A	2/11	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750311780	SPECIFICATION SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[750311780](#)