



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

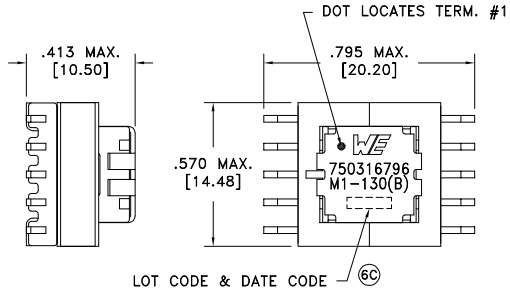

TERM. NO.'s FOR REF. ONLY





LOT CODE & DATE CODE (6C)

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	2.630 ohms ±10%
D.C. RESISTANCE	11-12 @20°C	0.28 mOhms max.
INDUCTANCE	2-4 10kHz, 100mVAC, Ls	22.40mH min.
DIELECTRIC	2-12 1500VAC, 2 seconds	-
TURNS RATIO	(2-4):(11-12)	200:1, ±1%

(6B)

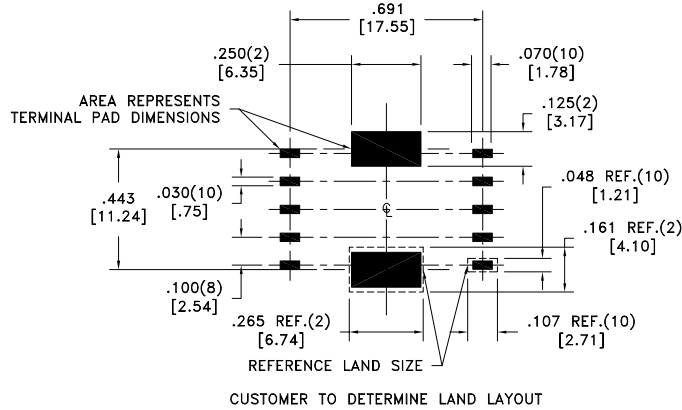

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Voltage-time product: 496 Vusec min. on SEC based on unipolar waveform.

Recommended burden resistor: 200 Ohms

Current Rating: 40A on PRI

(6C) UL recognized class B insulation system M1-130(B), E106391.
- Core is not considered to be dead metal.

(6C) Functional insulation only.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-1139 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750316796
6C	8/18					
6B	1/18					
6A	9/17	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750316796	SPECIFICATION SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Electronics:](#)

[750316796](#)