



| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
|-------------------|------|---------------|
| Sn96%, Ag4% | Yes | Yes |

more than you expect

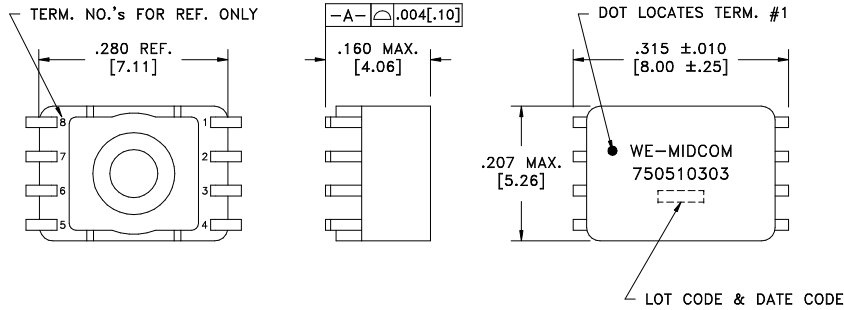

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER | TEST CONDITIONS | VALUE |
|-------------------------|-------------------------|------------------|
| D.C. RESISTANCE | 1-4 @20°C | 0.35 ohms max. |
| D.C. RESISTANCE | 8-5 @20°C | 0.35 ohms max. |
| INDUCTANCE | 1-4 100kHz, 100mVAC, Ls | 20uH min. |
| DIELECTRIC | 1-8 600VAC, 1 second | 500VAC, 1 minute |
| URNS RATIO | (1-4):(8-5) | 1:1, ±1% |
| COMMON MODE ATTENUATION | 1MHz | -50dB typ. |
| COMMON MODE ATTENUATION | 10MHz | -30dB typ. |
| COMMON MODE ATTENUATION | 125MHz | -15dB typ. |

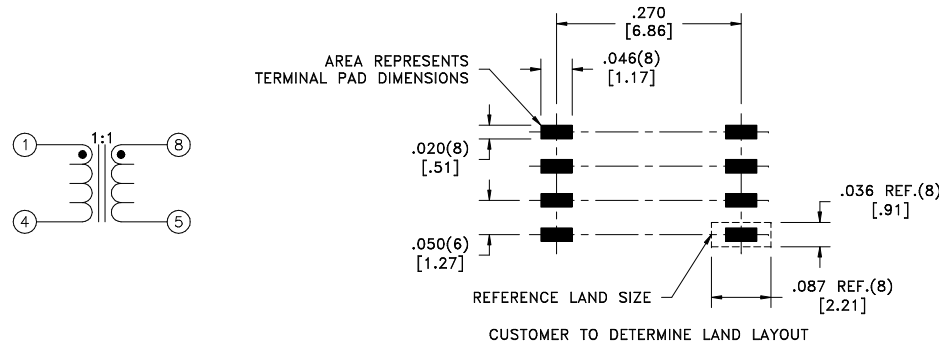

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +85°C.

DETAILS SUBJECT TO CHANGE

| REV. | DATE | Packaging Specifications Method: Tape & Reel PKG-0510 www.we-online.com/midcom | CONVENTION PLACEMENT | Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13] | DRAWING TITLE INDUCTOR CHOKE | PART NO. 750510303 |
|------|------|--|----------------------|--|--|------------------------------|
| 6A | 4/11 | SEE REVISION SHEET FOR REVISION LEVEL | | This drawing is dual dimensioned. Dimensions in brackets are in millimeters. | eiSos p/n: 750510303 | SPECIFICATION SHEET 1 OF 1 |



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[750510303](#)