
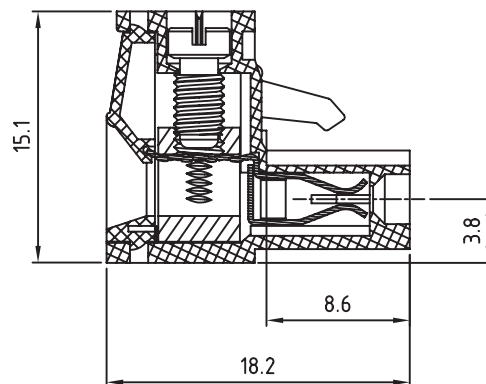
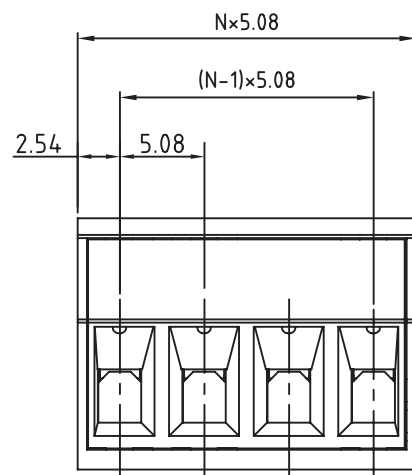


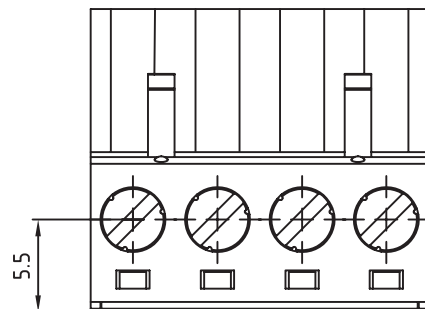

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA 66
FLAMABILITY RATING: UL94-V0
COLOR: GREEN
METAL HOUSING: BRASS (CuZn)
TERMINAL SCREW: STEEL ZINC PLATING "-" SLOT TYPE
WIRE GUARD: PhBz TIN PLATED

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

	cULus	VDE
CURRENT RATING:	12A	20A
WORKING VOLTAGE:	300VAC	300VAC
WITHSTANDING VOLTAGE:	1.6KV	2.5KV
CONTACT RESISTANCE:	20 mOhm MAX	

STANDARD

CERTIFIED E315414 / MODEL NUMBER 351
 CERTIFIED 40023195 / MODEL NUMBER 351

MECHANICAL

SOLID WIRE:	24-12 AWG	0.20-3.0MM ²
STRANDED WIRE:	24-12 AWG	0.20-3.0MM ²
TORQUE:	5Lb.In / 0.5Nm	

WIRE STRIPE LENGTH: 7-8MM

SCREW: M3
PITCH: 5.08MM


PACKAGING: BOX

SERIE 351

RoHS Compliant

G			
F			
E			
D	05-NOV-12	V-UL	GG
C	13-OCT-09	STANDARD	JP
B	29-OCT-08	CHARACTERISTICS	JP
A	31-OCT-07	PDF	EC
REV	DATE	FILE	BY

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2

.XX = ± 0.15

APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW: MARVIN



DESCRIPTION: SERIE 351 - 5.08MM VERTICAL CABLE ENTRY PLUG
3.0MM² WIRES WR-TBL

WERI PART NO: 691 351 500 0xx

SIZE

A4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[691351500009](#)