




## NOTES:

- 1. ROHS COMPLIANT
- 2. HEADER: PHENOLIC WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- 3. STORAGE TEMPERATURE: -20°C TO +125°C
- 4. COMPLIANCE TO J-STD:
  - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
  - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
  - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- 5. TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.e E2023FNL BECOMES E2023FNLT).







FINAL OUTLINE

## © Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)


PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,10D,1:2.5,SM,TU	E2023FNL-11	PS-2753.001-A	1 OF 3	E2023FNL	A


E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US). ASIA@PUI SFFI FCTRONICS.COM(Asia) PHONI

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768









SCHEMATIC - PINS 4, 5, 12 AND 13 NOT CONECTED

ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED

PARAMETER	SPECIFICATIONS			
OPERATING TEMPERATURE	0°C – 70°C			
TURNS RATIO	$(1-3):(16-14) = 1$ CT : 1CT $\pm 3\%$ $(6-8):(11-9) = 1$ CT : 2.5CT $\pm 3\%$			
POLARITY	PER SCHEMATIC			
INDUCTANCE (OCL)	1-3 = 200 uH MIN AT 100 KHZ, 20 mVRMS 6-8 = 35 uH MIN AT 100 KHZ, 20 mVRMS			
LEAKAGE INDUCTANCE	(1-2) = 0.4 uH MAX WITH 14-16 SHORTED (6-7) = 0.25 uH MAX WITH 9-11 SHORTED (100 KHz, 20 mV)			
DC RESISTANCE $(1-2) = (2-3) = (6-7) = (7-8) = 0.6$ OHM MAX (10-11) = (9-10) = (15-16) = (14-15) = 1.0 OHM				
CWW	15 pF MAX AT 100 KHz, 1 VRMS			
COMMON	1-30 MHz	40-100 MHz		
	-50 dB MIN	-40 dB MIN		
BETWEEN CHANNEL ISOLATION	1500 VAC MIN @ 60 SECONDS			

© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)


PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
		I J DIVAMING		11411 1101	Brinditeen nen
MDL,SIN,10D,1:2.5,SM,TU	E2023FNL-11	PS-2753.001-A	2 OF 3	E2023FNL	А

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US). ASIA@PUI SFFI FCTRONICS.COM(Asia)

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768





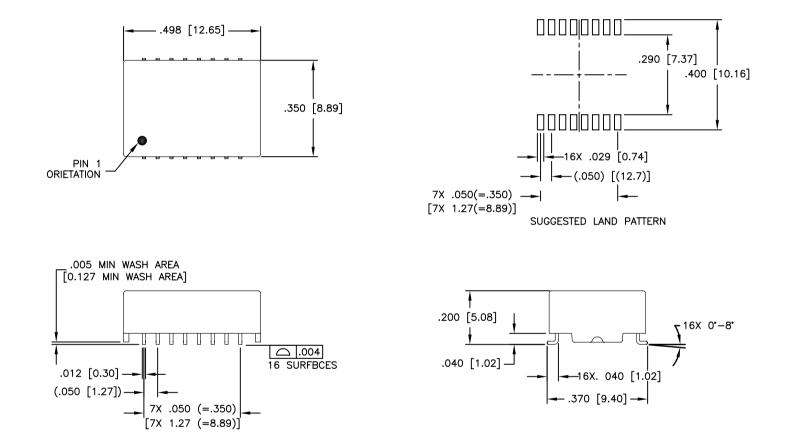

DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY. .XX=  $\pm$ .01 [ $\pm$ 0.25] .XXX=  $\pm$ .005 [ $\pm$ 0.13]

© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,10D,1:2.5,SM,TU	E2023FNL-11	PS-2753.001-A	3 OF 3	E2023FNL	A

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US), ASIA@PUI SFFI FCTRONICS.COM(Asia) PI

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: E2023FNLT E2023FNL