

# SMT Power Inductors

Flat Coils – PG0871NL series



-  **Current Rating:** up to 28Apk
-  **Inductance Range:** 0.46uH to 10.5uH
-  **Height:** 6.4mm Max
-  **Footprint:** 7.6mm x 7.4mm Max

Electrical Specifications @ 25°C — Operating Temperature - 40°C to +130°C<sup>1</sup>

| Part Number  | Inductance @Irated <sup>2</sup> (μH TYP) | Irated <sup>3</sup> (A) | Controlled Electrical Specs |                              | Saturation Current Isat <sup>5</sup> (A TYP) |       | SRF (MHz TYP) | Heating Current <sup>6</sup> Idc (A TYP) | Core Loss <sup>7</sup> Factor (K2) |
|--------------|------------------------------------------|-------------------------|-----------------------------|------------------------------|----------------------------------------------|-------|---------------|------------------------------------------|------------------------------------|
|              |                                          |                         | DCR <sup>4</sup> (mΩ) ±8%   | Inductance @ 0Adc (μH ± 20%) | 25°C                                         | 100°C |               |                                          |                                    |
| PG0871.461NL | 0.42                                     | 24.0                    | 1.5                         | 0.46                         | 28.0                                         | 25.0  | 88            | 24.0                                     | 14.196                             |
| PG0871.681NL | 0.64                                     | 19.0                    | 2.3                         | 0.68                         | 24.5                                         | 20.0  | 90            | 19.0                                     | 10.647                             |
| PG0871.821NL | 0.71                                     | 19.0                    | 2.3                         | 0.82                         | 21.0                                         | 18.0  | 62            | 19.0                                     | 10.647                             |
| PG0871.102NL | 0.80                                     | 17.5                    | 2.3                         | 1.00                         | 17.5                                         | 15.5  | 78            | 19.0                                     | 10.647                             |
| PG0871.152NL | 1.20                                     | 13.5                    | 4.4                         | 1.5                          | 14                                           | 12.5  | 69            | 13.5                                     | 8.517                              |
| PG0871.222NL | 2.00                                     | 9.5                     | 7.6                         | 2.20                         | 12.0                                         | 10.5  | 72            | 9.5                                      | 7.098                              |
| PG0871.332NL | 3.00                                     | 7.1                     | 13.5                        | 3.30                         | 10.5                                         | 9.5   | 62            | 7.1                                      | 5.324                              |
| PG0871.472NL | 4.50                                     | 6.7                     | 17.0                        | 4.70                         | 9.3                                          | 8.0   | 40            | 6.7                                      | 4.259                              |
| PG0871.682NL | 6.40                                     | 5.8                     | 20.0                        | 6.80                         | 7.8                                          | 6.5   | 40            | 5.8                                      | 3.549                              |
| PG0871.922NL | 8.80                                     | 4.9                     | 30.0                        | 9.20                         | 6.7                                          | 5.5   | 33            | 4.9                                      | 3.042                              |
| PG0871.103NL | 9.50                                     | 4.7                     | 31.5                        | 10.50                        | 6.3                                          | 5.3   | 22            | 4.7                                      | 2.839                              |

## NOTES:


- Actual temperature of the component during system operation(ambient plus temperature rise) must be within the standard operating range.
- Inductance at Irated is a typical inductance value for the component taken at rated current.
- The rated current as listed is either the saturation current (@ 25°C) or the heating current depending on which value is lower.
- The DCR of the part is measured at an ambient temperature of 20°C±3°C from point a and b as shown below on the mechanical drawing.
- The saturation current, Isat, is the current at which the component inductance drop by 20% (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The heating current, Idc, is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical pcb and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test. Take note that the components' performance varies depending on the system condition. IT is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- Core loss approximation is based on published core data:  
Core Loss = K1 \* (f)<sup>1.324</sup> \* (ΔB)<sup>2.422</sup> in mW  
K1 = 71.56 E-4  
ΔB = K2 \* Vusec in mT  
f = switching frequency in MHz  
K1 & K2 = core loss factors  
V = Voltage across the component in V  
Vusec = V \* D / f  
D = Duty cycle
- Unless otherwise specified, all testing is made at 100kHz, 0.1Vac
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PG0871.222NL becomes PG0871.222NLT). Pulse complies to industry standard tape and reel specification EIA481. The tape and reel for this product has a width(W=16.0mm), pitch(Po=12.0mm) and depth (Ko=6.8 mm).
- The core is a conductive material so care should be taken when mounting this component over an exposed via or if the voltage across the terminals exceeds 24V. Trickle current through the core material may generate additional losses and potential overheating. Please contact Pulse to discuss an alternative solution if required.

# SMT Power Inductors


Flat Coils - PG0871NL series



## Mechanicals

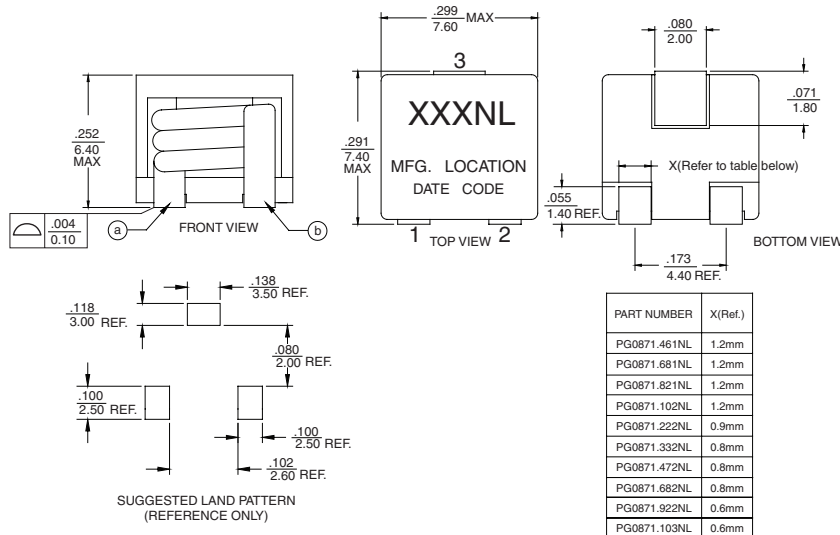

## Schematics



\* Pin 3 is for mechanical support only and has no internal electrical connection.


Weight ..... 1.1 grams

Tape & Reel ..... 700/reel


Dimensions: Inches  
mm

Unless otherwise specified,  
all tolerances are  $\pm .010$   
0.25

Typical Inductance vs DC Bias @25°C and 100°C

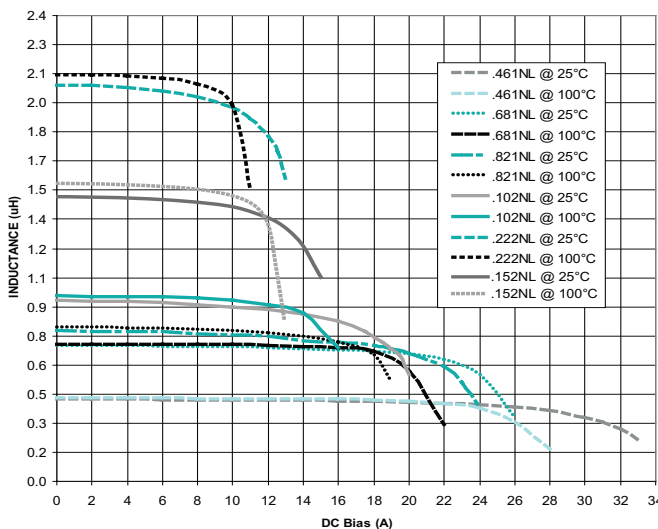

Typical Inductance vs DC Bias @25°C and 100°C

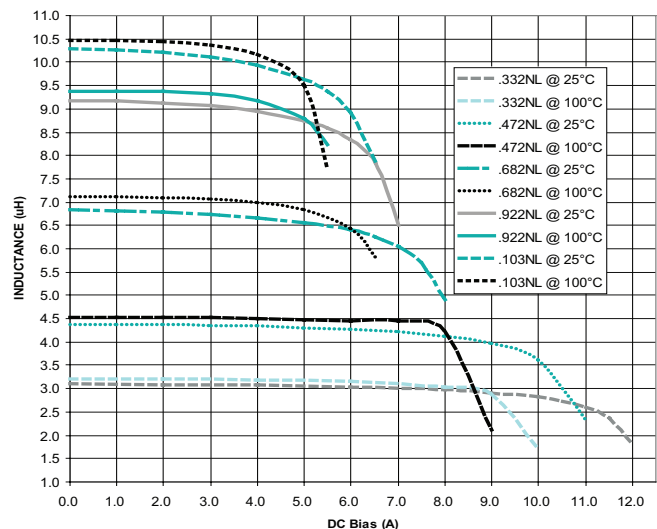

## For More Information

### Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100  
San Diego, CA 92128  
U.S.A.

### Pulse Europe

Pulse Electronics GmbH  
Am Rottland 12  
58540 Meinerzhagen  
Germany

### Pulse China Headquarters

Pulse Electronics (Shenzhen) CO., LTD  
D708, Shenzhen Academy of  
Aerospace Technology,  
The 10th Keji South Road,  
Nanshan District, Shenzhen,  
P.R. China 518057

### Pulse North China

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

### Pulse South Asia

3 Fraser Street  
0428 DUO Tower  
Singapore 189352

### Pulse North Asia

1F., No.111 Xiyuan Rd  
Zhongli City  
Taoyuan City 32057  
Taiwan (R.O.C)

Tel: 858 674 8100  
Fax: 858 674 8262

Tel: 49 2354 777 100  
Fax: 49 2354 777 168

Tel: 86 755 33966678  
Fax: 86 755 33966700

Tel: 86 21 62787060  
Fax: 86 2162786973

Tel: 65 6287 8998  
Fax: 65 6280 0080

Tel: 886 3 4356768  
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PG0871.922NLT](#) [PG0871.152NLT](#) [PG0871.461NLT](#) [PG0871.821NLT](#) [PG0871.682NLT](#) [PG0871.103NLT](#)  
[PG0871.681NLT](#) [PG0871.332NLT](#) [PG0871.222NLT](#) [PG0871.102NLT](#) [PG0871.472NLT](#)