








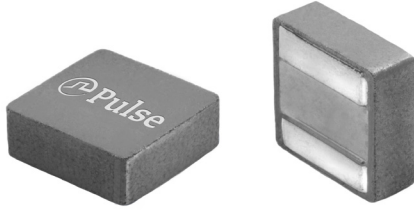

SMT Power Inductors

High Current Composite Inductor - PA2240XXXNLT and PM2240.XXXNLT




-  **Height:** 7.0mm Max
-  **Footprint:** 8.05mm x 7.85mm Max
-  **Current Rating:** up to 15.1Arms
-  **Inductance Range:** 3.3uH to 6.8uH
-  High current, low DCR, and high efficiency
-  High reliability
-  Minimized acoustic noise and minimized leakage flux noise
-  Available in Commercial (PA2240) and Automotive (PM2240) grades

Electrical Specifications @ 25°C, Operating Temperature Range per Below^{4,5}


Part Number		Inductance 100KHz, 0.1V uH±20%	Rated ³ Current A	DC Resistance		Saturation Current ² (25°C) A	K Factor for Core Loss	Mechanical D ±0.3
Commerical (-55°C to 125°C)	Automotive ⁶ (-55°C to 155°C)			TYP.	MAX.			
				mΩ	mΩ			
PA2240.332NLT	PM2240.332NLT	3.3	15.1	8.56	9.42	15.1	-	6.7
PA2240.472NLT	PM2240.472NLT	4.7	13.6	12.2	13.5	14.0	-	6.7
PA2240.682NLT	PM2240.682NLT	6.8	9.5	17.8	19.6	11.0	-	6.5

Notes:


- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance drops by approximately 30% at the stated ambient temperature. The maximum allowable drop at this stated current is 40% of the initial inductance. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The rated current is the DC current required to raise the component temperature by approximately 40 °C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- The part temperature (ambient+temp rise) should not exceed 125 °C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- The PMxxxx.XXXNLT part numbers are AEC-Q200 and IATF16949 certified. The inductance and mechanical dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) >1.33 and therefore may not strictly conform to PPAP.
- Special Characteristics 

Mechanical

PA2240.XXXNLT and PM2240.XXXNLT

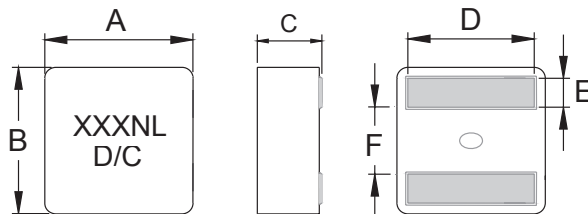

FINAL LAYOUT



SUGGESTED PAD LAYOUT


Series	A	B	C	D	E	F	L	G	H
PA2240/PM2240	7.8±0.25	7.6±0.25	6.7±0.3	SEE SPEC TABLE	1.75±0.2	3.15±0.25	7.8 (REF)	2.8 (REF)	6.7 (REF)

All Dimensions in mm.

SMT Power Inductors

High Current Composite Inductor - PA2240XXXNLT and PM2240.XXXNLT




TAPE & REEL INFO

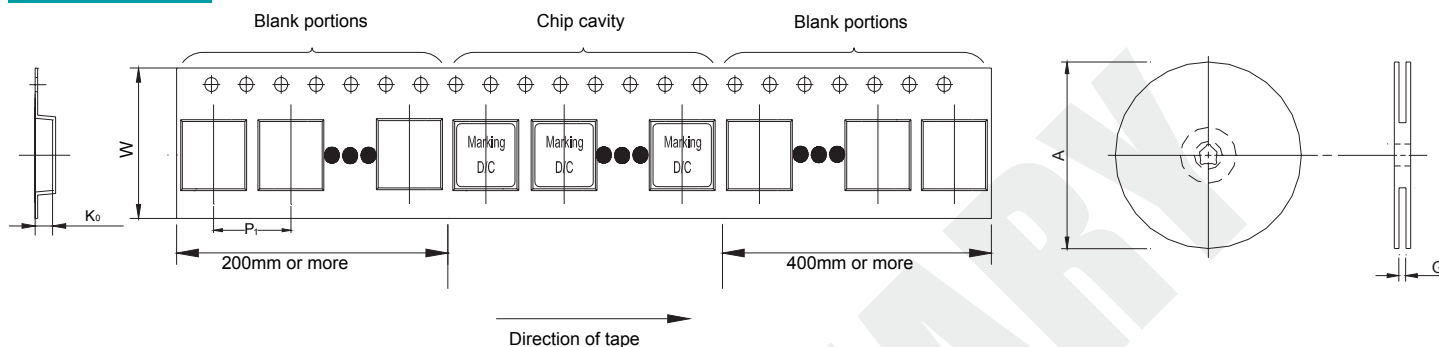


SURFACE MOUNTING TYPE, REEL/TAPE LIST

	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P ₁	W	K ₀	
PA2240/PM2240	Ø330	16.4	12	16	7.3	700

Typical Performance Curves

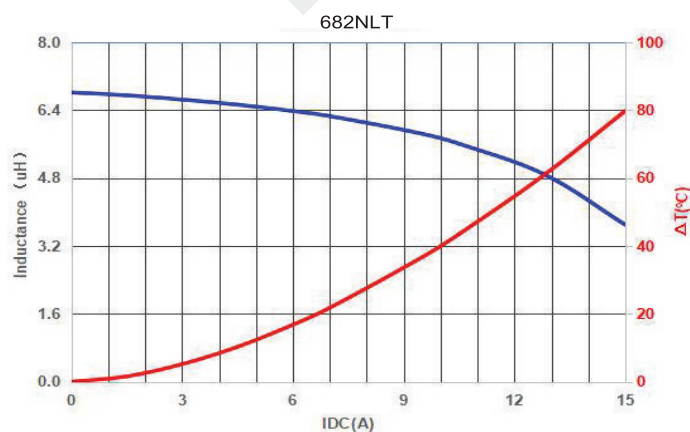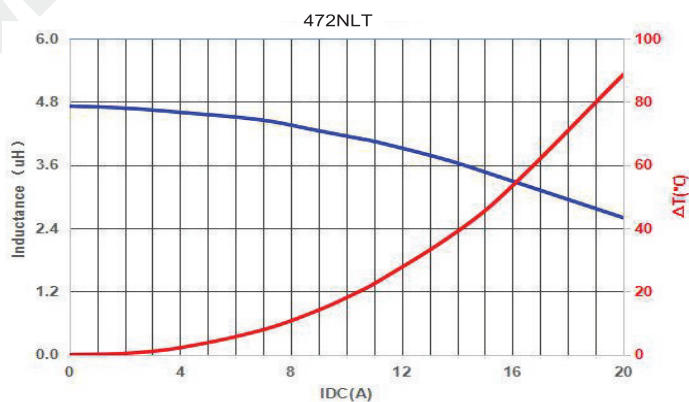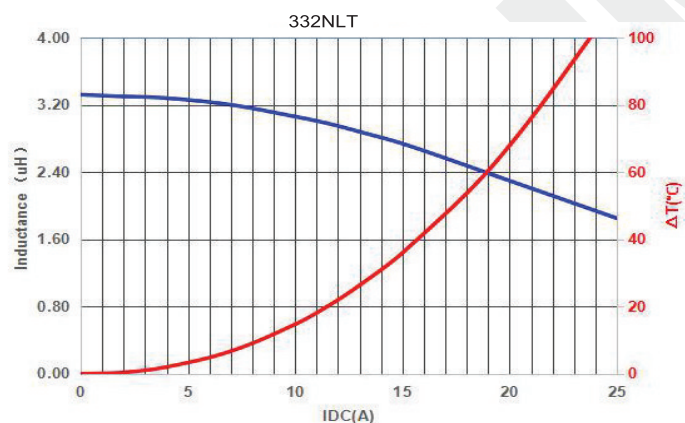

CORE LOSS vs FLUX DENSITY

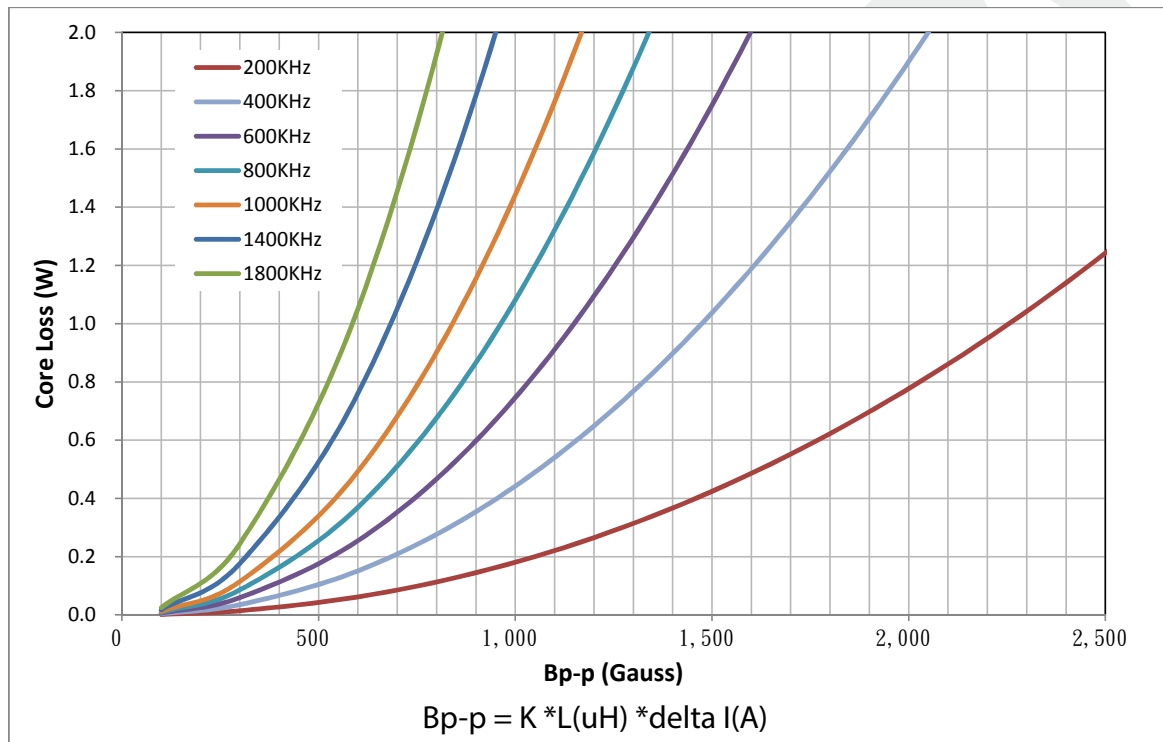

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen,
P.R. China 518057

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia

3 Fraser Street
0428 DUO Tower
Singapore 189352

Pulse North Asia

1F., No.111 Xiyuan Rd
Zhongli City
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 86 21 62787060
Fax: 86 2162786973

Tel: 65 6287 8998
Fax: 65 6280 0080

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PA2240.332NLT](#) [PM2240.332NLT](#) [PM2240.472NLT](#) [PM2240.682NLT](#) [PA2240.472NLT](#) [PA2240.682NLT](#)